


Electron/Positron Measurement in FGT

Xinchun Tian, Sanjib R. Mishra, Roberto Petti

..... *very much a work in progress*

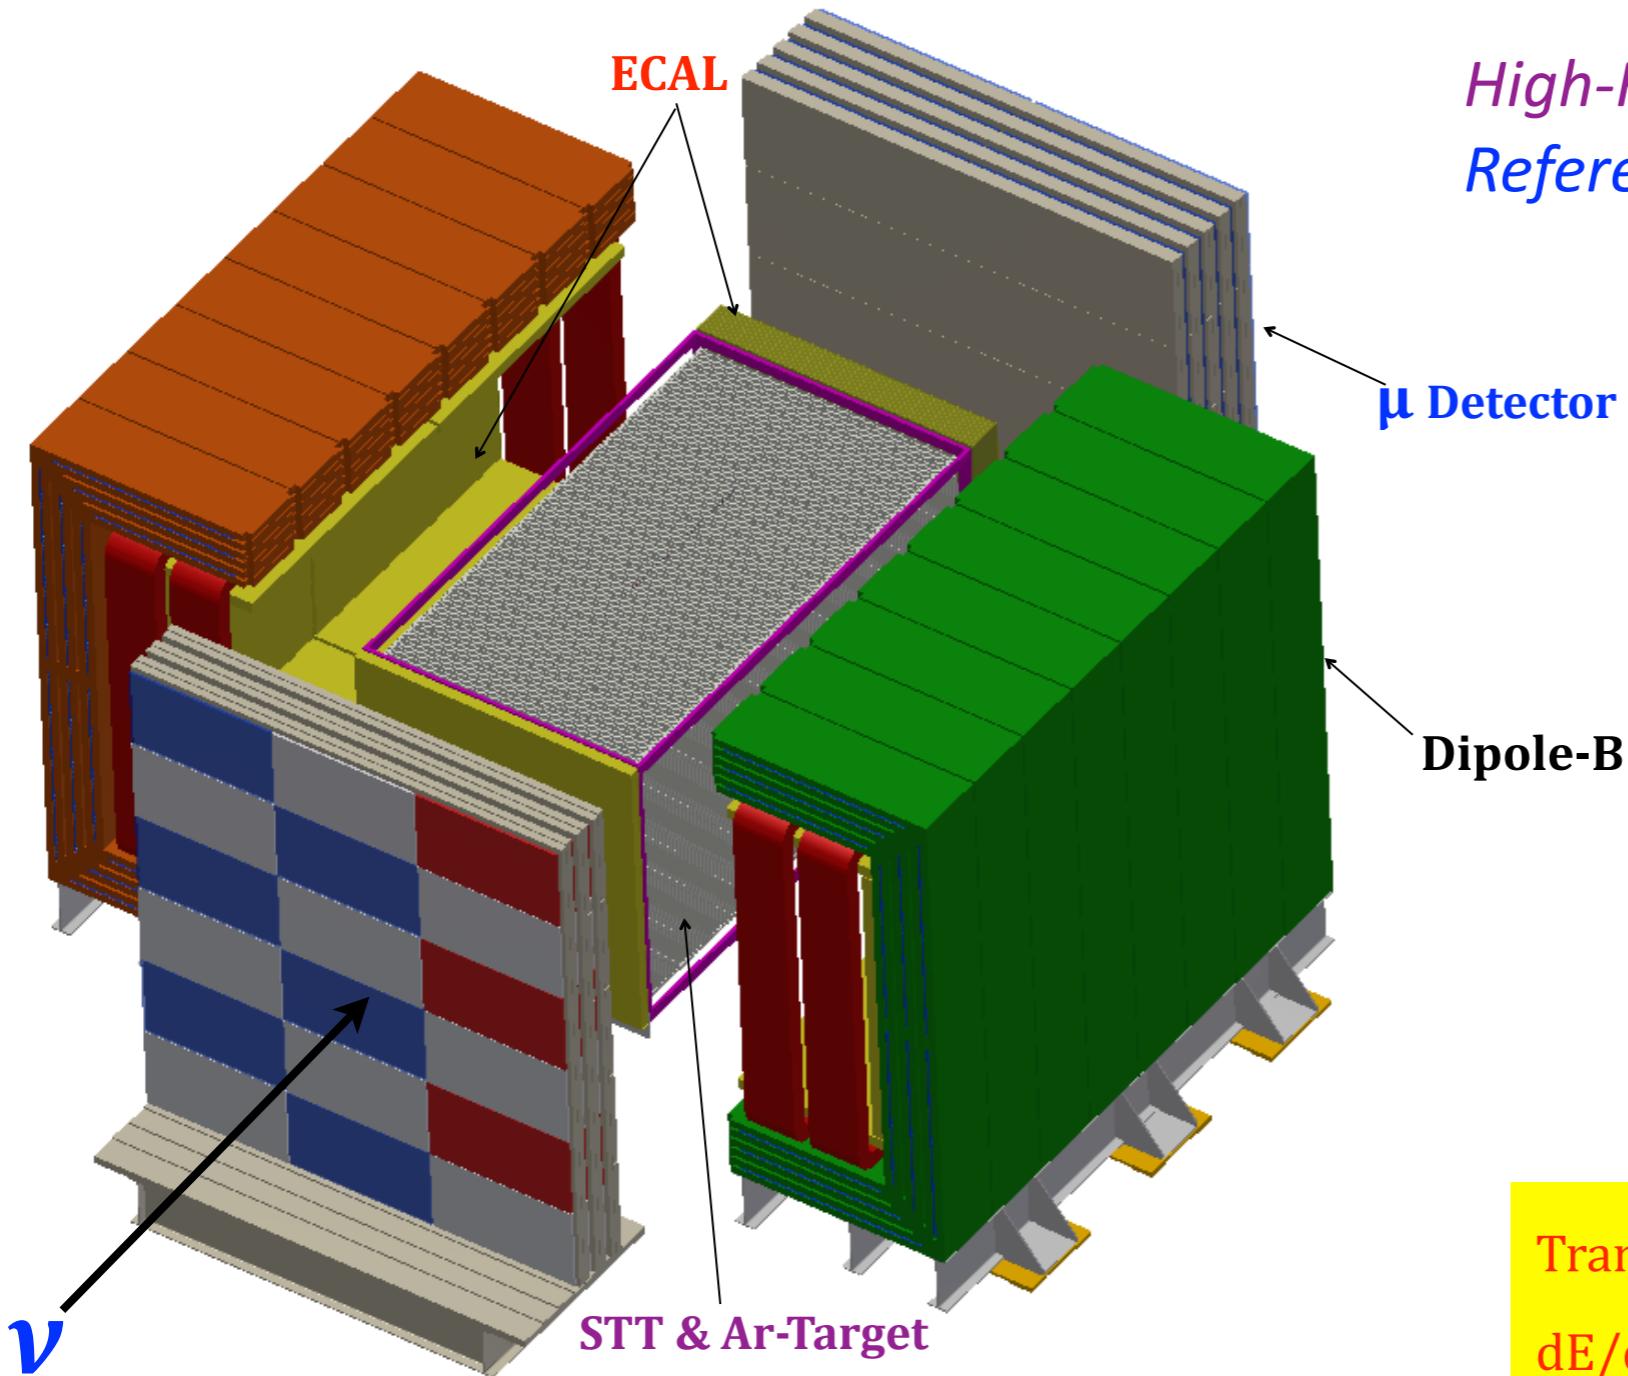


High-Resolution Fine Grain Tracker: Reference ND of DUNE

- ❖ $\sim 3.5\text{m} \times 3.5\text{m} \times 6.5\text{m}$ STT ($\rho \simeq 0.1\text{gm/cm}^3$)
- ❖ 4π -ECAL in a Dipole-B-Field (0.4T)
- ❖ 4π - μ -Detector (RPC) in Dipole and Downstream
- ❖ Pressurized Ar-target ($\simeq x5$ FD-Stat) \Rightarrow LAr-FD

Transition Radiation	$\gg e^{+/-} \text{ ID} \Rightarrow \gamma$
dE/dx	$\gg \text{Proton, } \pi^{+/-}, K^{+/-}$
Magnet/Muon Detector	$\gg \mu^{+/-} e^{+/-}$
$(\Rightarrow \text{Absolute Flux measurement})$	
$1X_0 \sim 600 \text{ cm} / 1\lambda \sim 1200 \text{ cm}$	

A ν_μ CC candidate in NOMAD

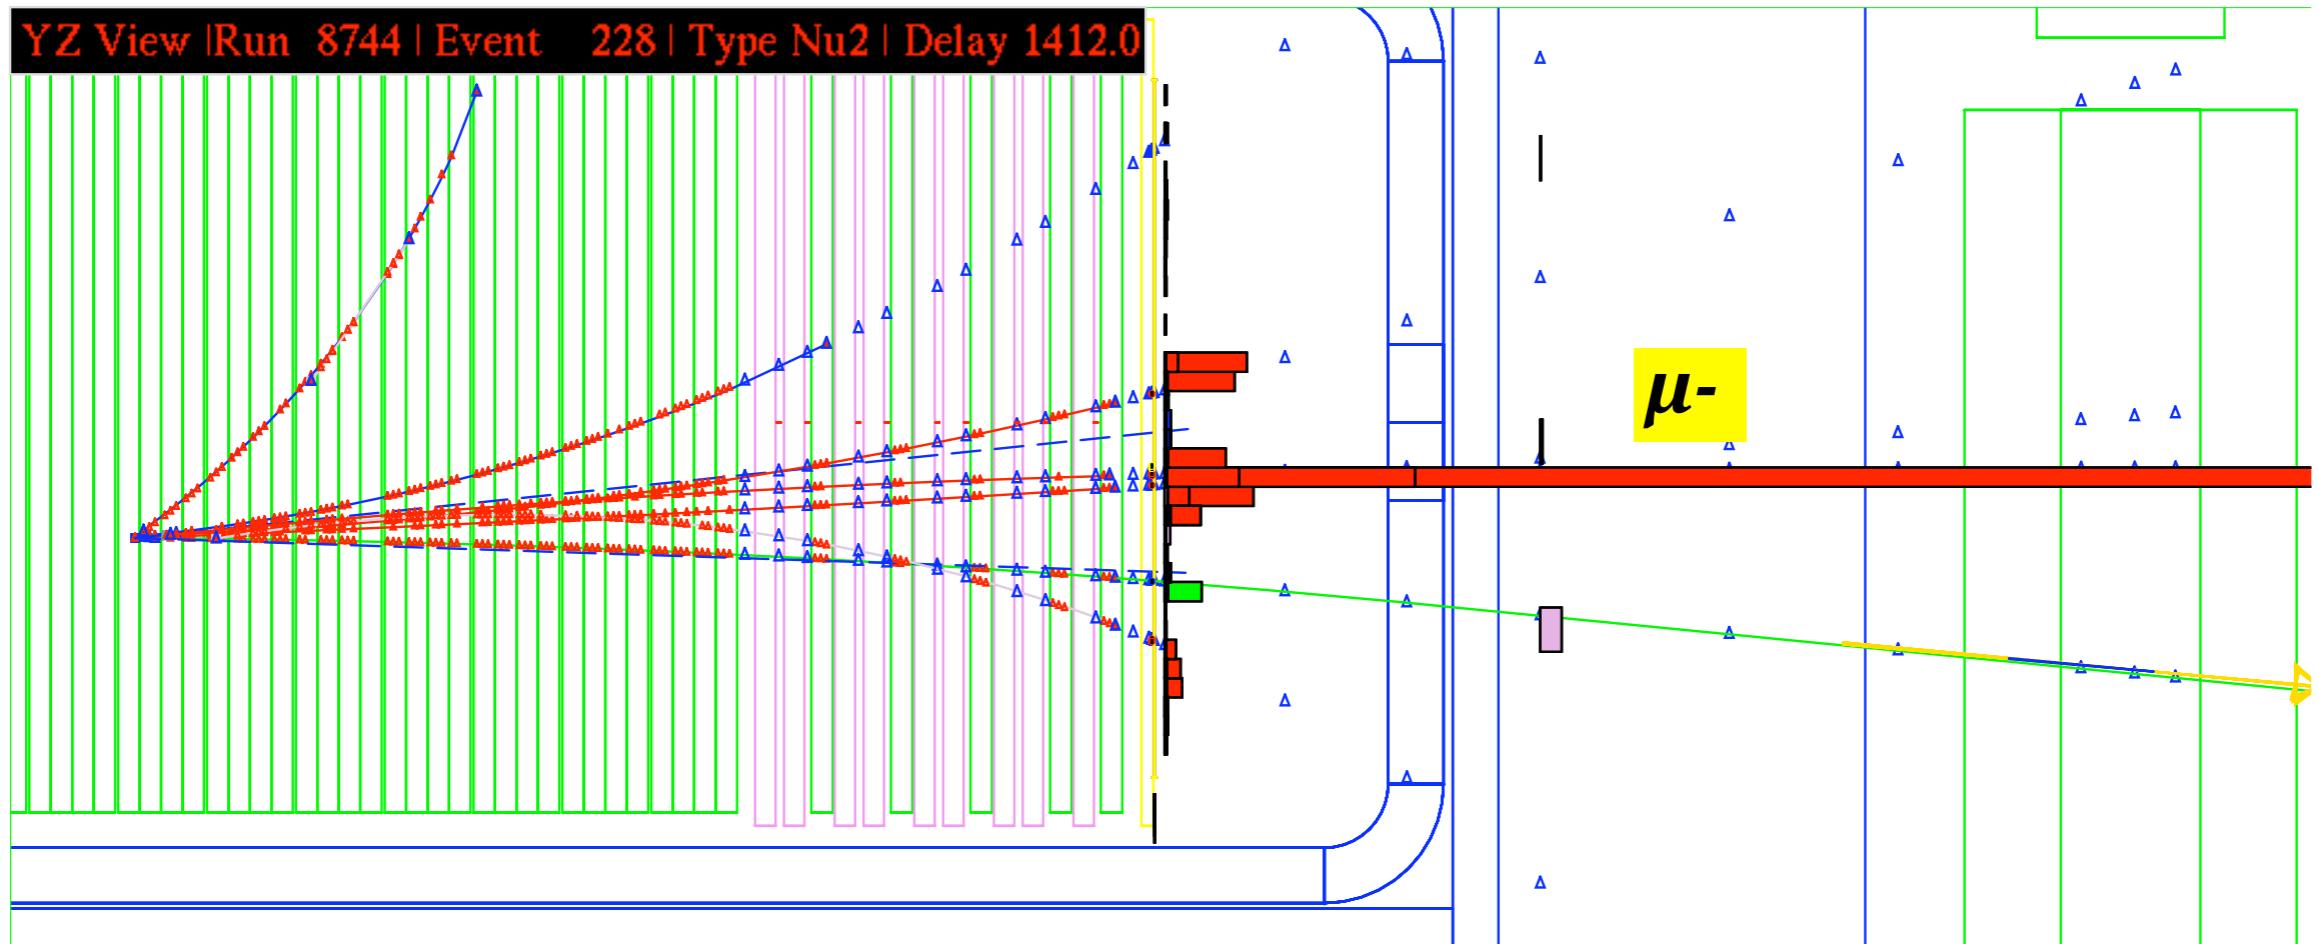


Observation \Rightarrow

- (1) **Hadrons** are tracks, enabling the momentum vector measurement
- (2) μ is kinematically separated from **Hadron-vector** \Rightarrow Miss- P_T Measurement
- (3) FGT offers $\sim x5$ higher tracking-points for hadronic tracks

A $\bar{\nu}_e$ CC candidate in NOMAD

⇒ Most difficult to measure among the 4 ν -species

In FGT, >x5 higher track-points

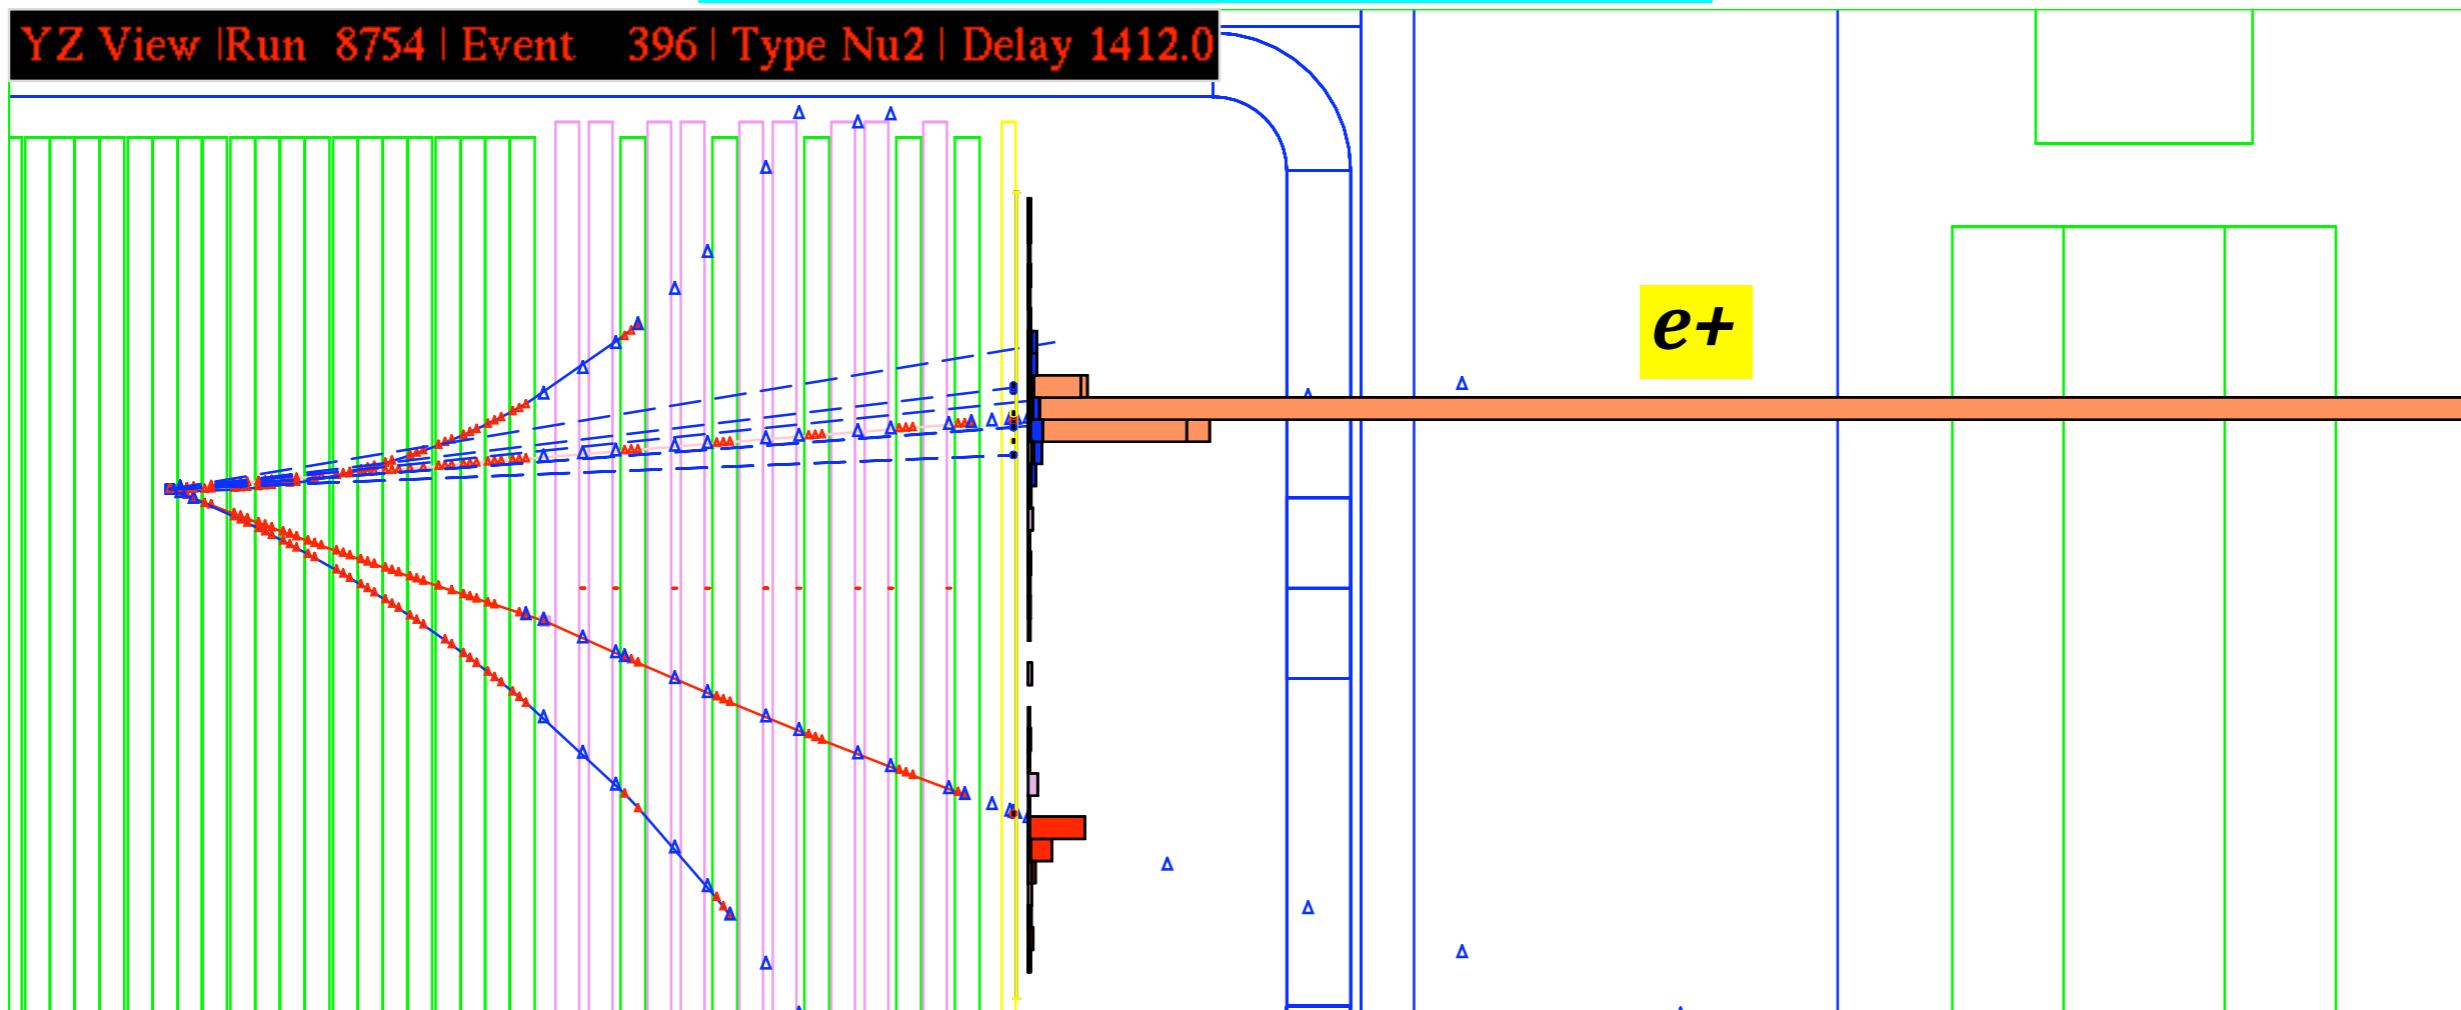


Conclusion ⇒

- (1) $e \leftrightarrow \nu e$ ↔ $\mu \leftrightarrow \nu \mu$ are Tracks: Curvature & Direction with very high precision
- (2) Universality equivalence: $\mu - \nu \mu$ ↔ $e - \nu e$

Resolutions in FGT

- ❖ $\rho \approx 0.1 \text{ gm/cm}^3$
- ❖ Space point position $\approx 200\mu$
- ❖ Time resolution $\approx 1\text{ns}$
- ❖ CC-Events ($\geq 2Trk$) Vertex: $\delta \approx O(100\mu)$
- ❖ Energy in Downstream-ECAL $\approx 6\%/\sqrt{E}$
- ❖ μ -Angle resolution ($\sim 3 \text{ GeV}$) $\approx O(2 \text{ mrad})$
- ❖ μ -/+ Energy resolution ($\sim 3 \text{ GeV}$) $\sim 3.5\%$
- ❖ e -/+ Energy resolution ($\sim 3 \text{ GeV}$) $\sim 3.5\%$

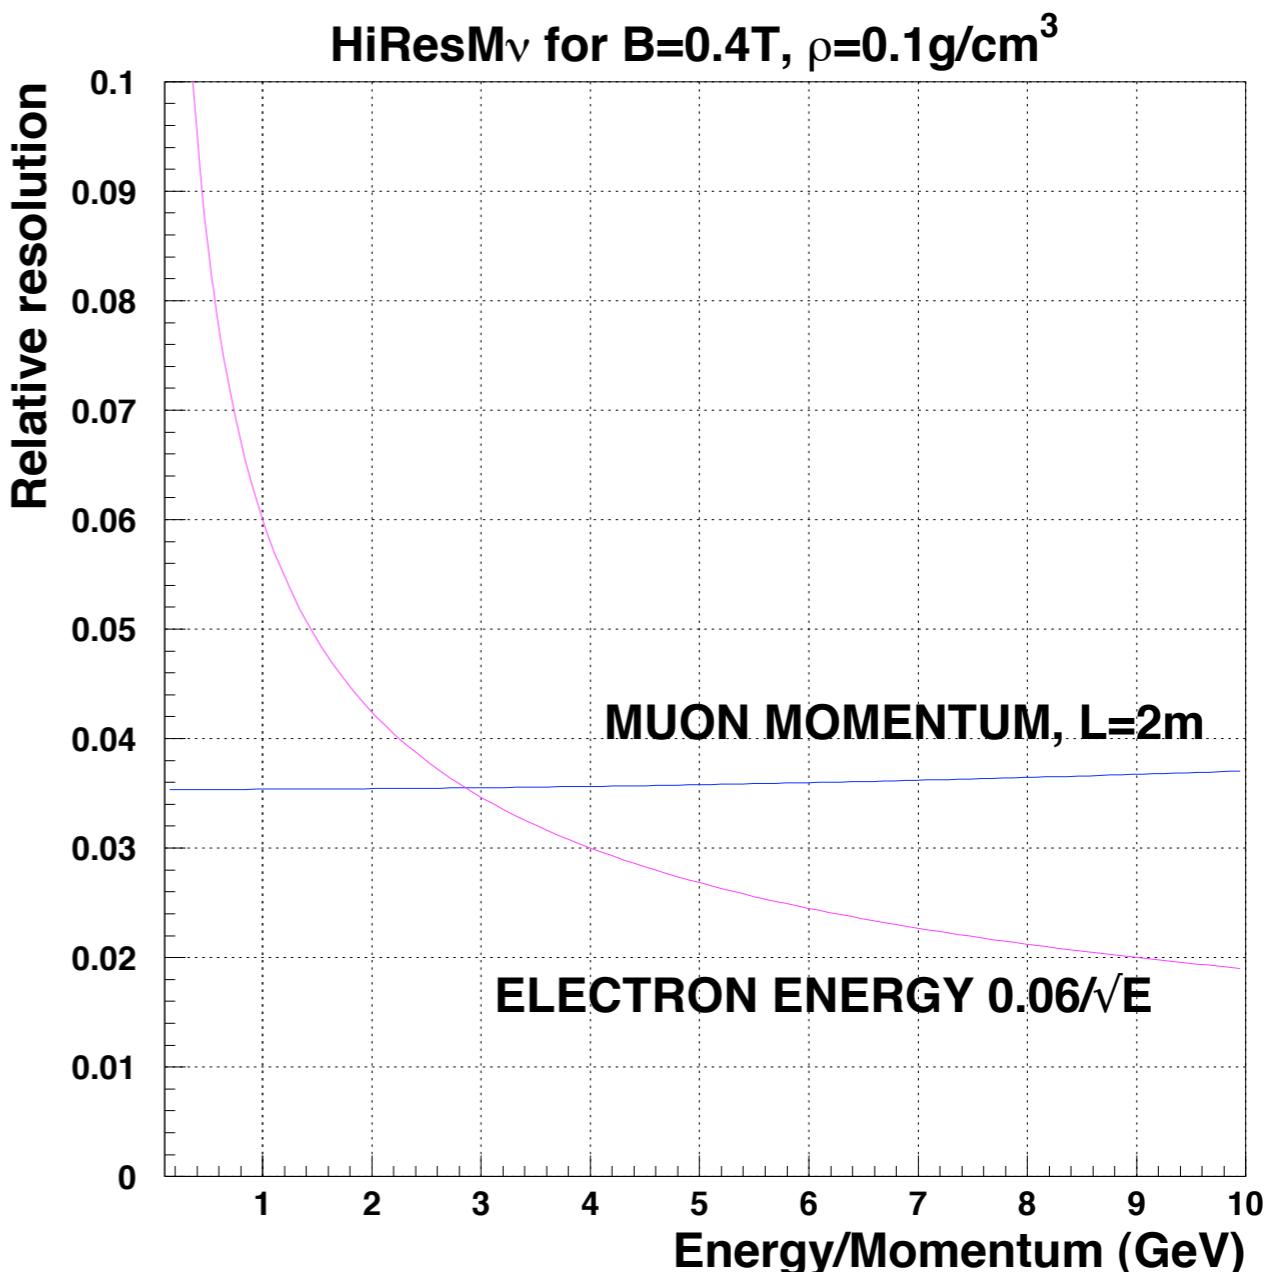

Electron/Positron Measurement in FG

* $\nu_e \leftrightarrow e^-$; $\text{anti-}\nu_e \leftrightarrow e^+$;

* e- Momentum Vector Measurement:

Track-reconstruction in STT:

Curvature $\Rightarrow |\mathbf{p}|$ & “-” or “+”

Direction-cosines \Rightarrow STT Track-fit extrapolated to the vertex including dE/dx

Energy \Rightarrow Cluster & Brem-Strip in the ECAL: *A more precise measure of $|\mathbf{p}_e|$*

* e-ID Measurement:

1st: Transition Radiation (TR) measurement in the STT

2nd: Energy-profile, *Transverse and Longitudinal energy-deposition pattern*, in the ECAL
(match the STT-Track with the ECAL-Track)



Note: *ECAL has a 4π -coverage \Rightarrow Wide-angle e^-/e^+ acceptance*

$\Rightarrow \pi/\mu$ reduced by $\sim 10^{-4}$ while *Electron-Eff > 90%*

3rd: Pattern of energy loss (*Helical track-fit*) in STT

Electron ID: TR - The most potent discriminant

Analog readout: pulse height

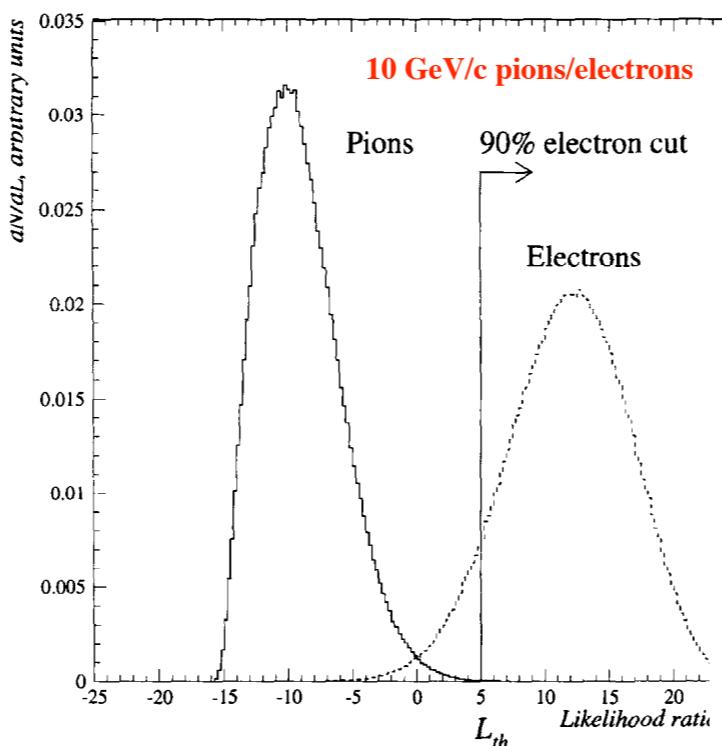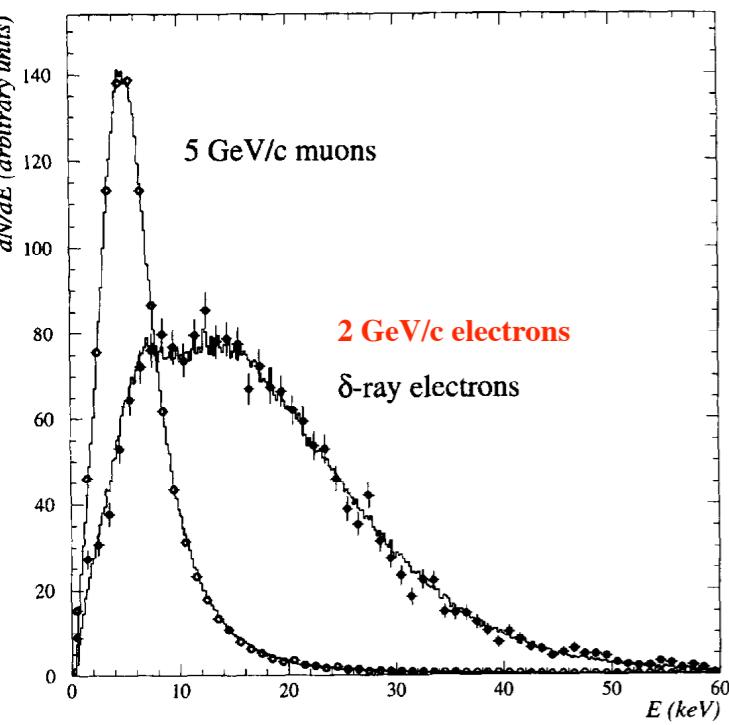

NOMAD TRD reaches a 0.1% pion contamination for isolated tracks of momenta 1-50 GeV/c with 90% electron efficiency

★Atlas-TRT's-simulation conducted for the FGT config. verifies the $e/\mu-\pi$ separation
(See P.Nevski LBNE-DocDB#432-V1)

Electron TR-Eff as a function of P_e for 10^{-3} rejection of π/μ

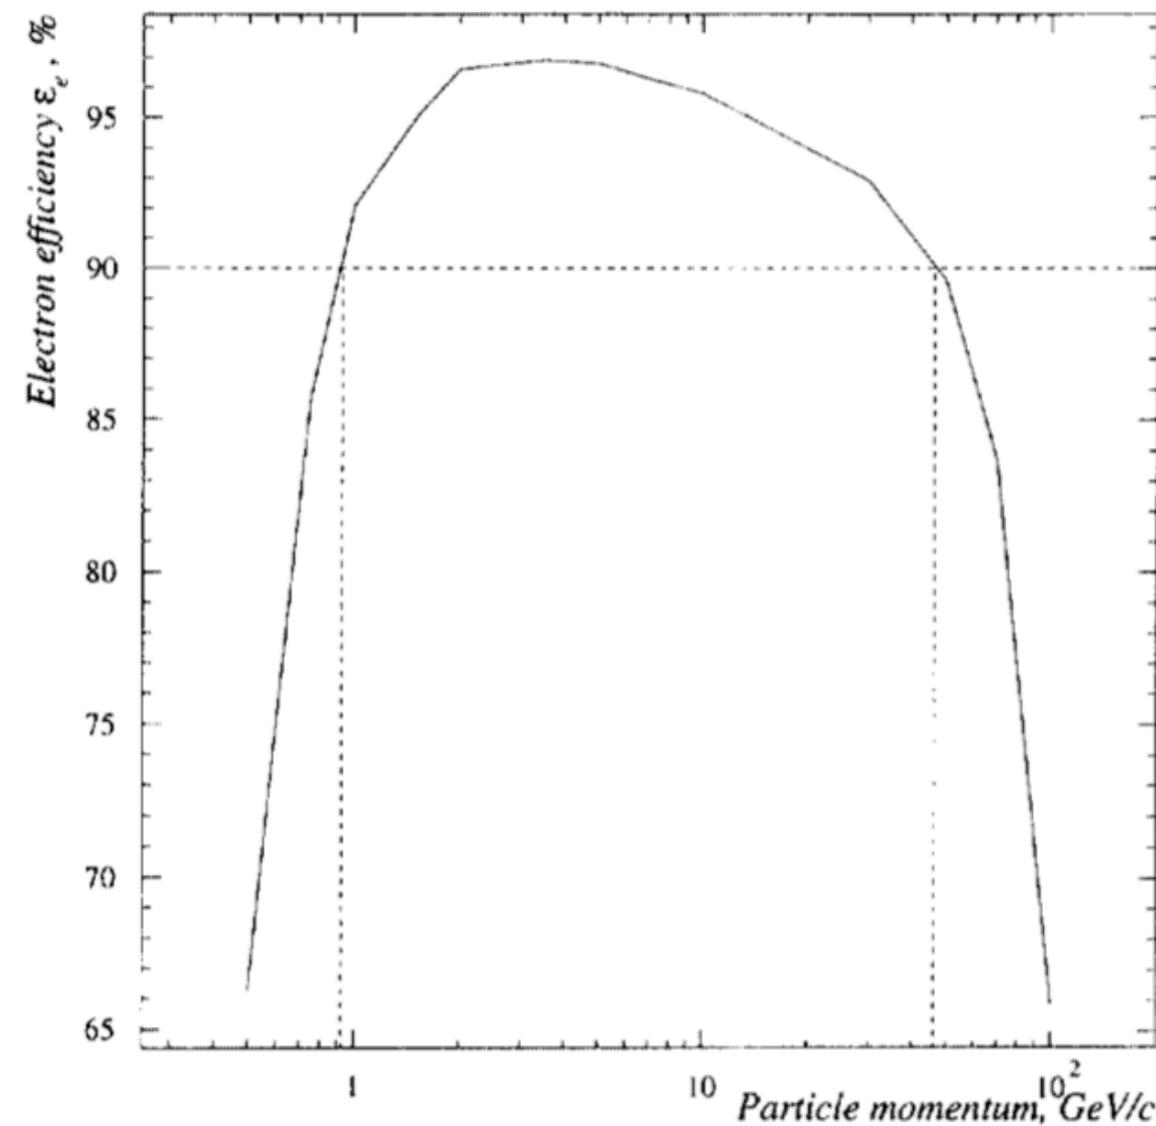


Fig. 8. Monte Carlo predicted electron efficiency ε_e corresponding to $\varepsilon_\pi = 10^{-3}$ as a function of the momentum of the particle for 9 associated hits.

Measure $\gg e, \gamma, \& n/K^0 s$

* Scintillator-Pb calorimeter: Motivated by the T2K-ECAL design

Alternating planes of X/Y planes

2.5cm Sci-slats read on both ends (SiPM)

* Downstream (Forward) ECAL:

60 Layers with 1.75mm Pb-sheets: $20X_0$

Single electron $\Rightarrow \sim 6\%/\sqrt{E}$

* Barrel ECAL:

18 Layers with 3.5mm Pb-sheets: $10X_0$

* Upstream ECAL:

18 Layers with 3.5mm Pb-sheets: $10X_0$

Will be updated: *More details (plots/#s) later*

Electron Efficiency in FG T (Prelim.)

Efficiencies/Purity from Fast-MC. (TR cut: *40-planes of ST*)
Cross-checked against NOMAD Data -vs- MC

- * $P > 0.5 \text{ GeV}$: Efficiency $\sim \sim 58\%$; *Purity* $\geq 90\%$
- * Efficiency & *Purity* largely energy independent
- * Fast-MC of NOMAD yeilds : Efficiency $\sim \sim 38\%$; *Purity* $\sim 82\%$
NOMAD Geant-MC (Data-driven): Efficiency $\sim \sim 40\%$; *Purity* $\sim 79\%$

Electron Energy Resolution in FG T (Prelim.)

- * $\delta|P| \sim 10\% (@FWHM)$
- * $\delta|E|$ (ECAL) $\sim 3.6\%$ (*consistent with* $6\% / \sqrt{E}$)
- * NOMAD Geant-MC (Data-driven): $\delta|P| \sim 13\% (@FWHM)$
 $\delta|E|$ (ECAL) $\sim 2.0\%$ ($\sim 3\% / \sqrt{E}$)

A final separation of $\nu e \Rightarrow e$ from the non-prompt $\pi^0/\pi^+ \Rightarrow e/e\text{-like}$

- * Use the Lepton-Hadron **kinematic isolation** to reduce the impurity (...later)

Test-Beam Calibration of STT (TR) and ECAL (Shape)

*Measurement of the STT prototype in a Test-Beam

- ⇒ Check/obtain calibration
- ⇒ dE/dx , TR: e vs μ vs π vs in momentum bins
- ⇒ Essential before full-scale fabrication

*Measurement of the STT and ECAL prototypes in a Test-Beam

- ⇒ Obtain energy (ADC ⇒ GeV) calibration
- ⇒ Measure the energy-dependent non-Gaussian tails
- ⇒ Particle ID: e vs μ vs π *shower-shape* discriminant in momentum bins
- ⇒ Essential before full-scale fabrication


in situ Constraint on the Electron-efficiency

* Measure the TR and ECAL Efficiencies using source of pure e^+e^-

(1) Select $\gamma \rightarrow e^+e^-$ conversions using track reconstruction

& kinematics

- ⇒ A V^0 separated from the vertex ($>1\text{cm}$)
- ⇒ The opening angle in X-Z plane is $<5\text{ mrad}$
- ⇒ $M_{ee} < 30\text{ MeV}$ (consistent with a Photon)
- ⇒ $\sim 5 \cdot 10^7$ reconstructed Photons with Purity $> 99\%$

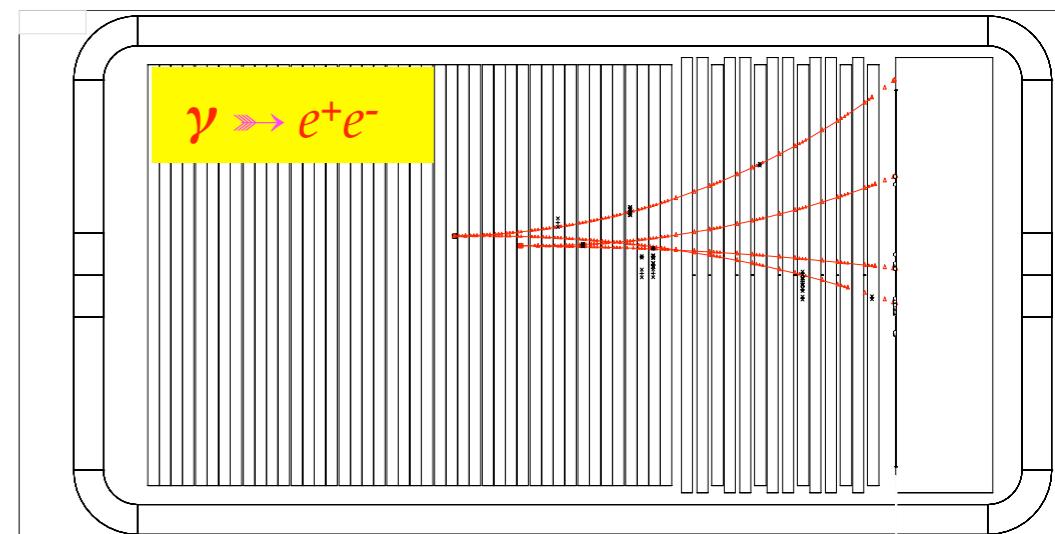

Sanity-Check: Apply the analysis to, and learn from, the NOMAD data (see fig.)
Estimates of the parametrized calculation, Purity & Eff, agree within 15%.

(2) On the $e^{-/+}$ tracks, impose the TR-cuts (Data & MC)

⇒ Evaluate the TR efficiency in Data and MC


(3) On the $e^{-/+}$ tracks, impose the ECAL Shower-Shape cuts (Data & MC)

⇒ Evaluate the ECAL-Id efficiency in Data and MC

e-/e+ TR-Efficiency in Data .vs. MC Using $\gamma \rightarrow e^+e^-$ sample


(γ 's come from $\pi^0 \rightarrow \gamma \gamma$)

Negative TRD-Efficiency[0.001]: Data(\square) –vs– MC(\pm)

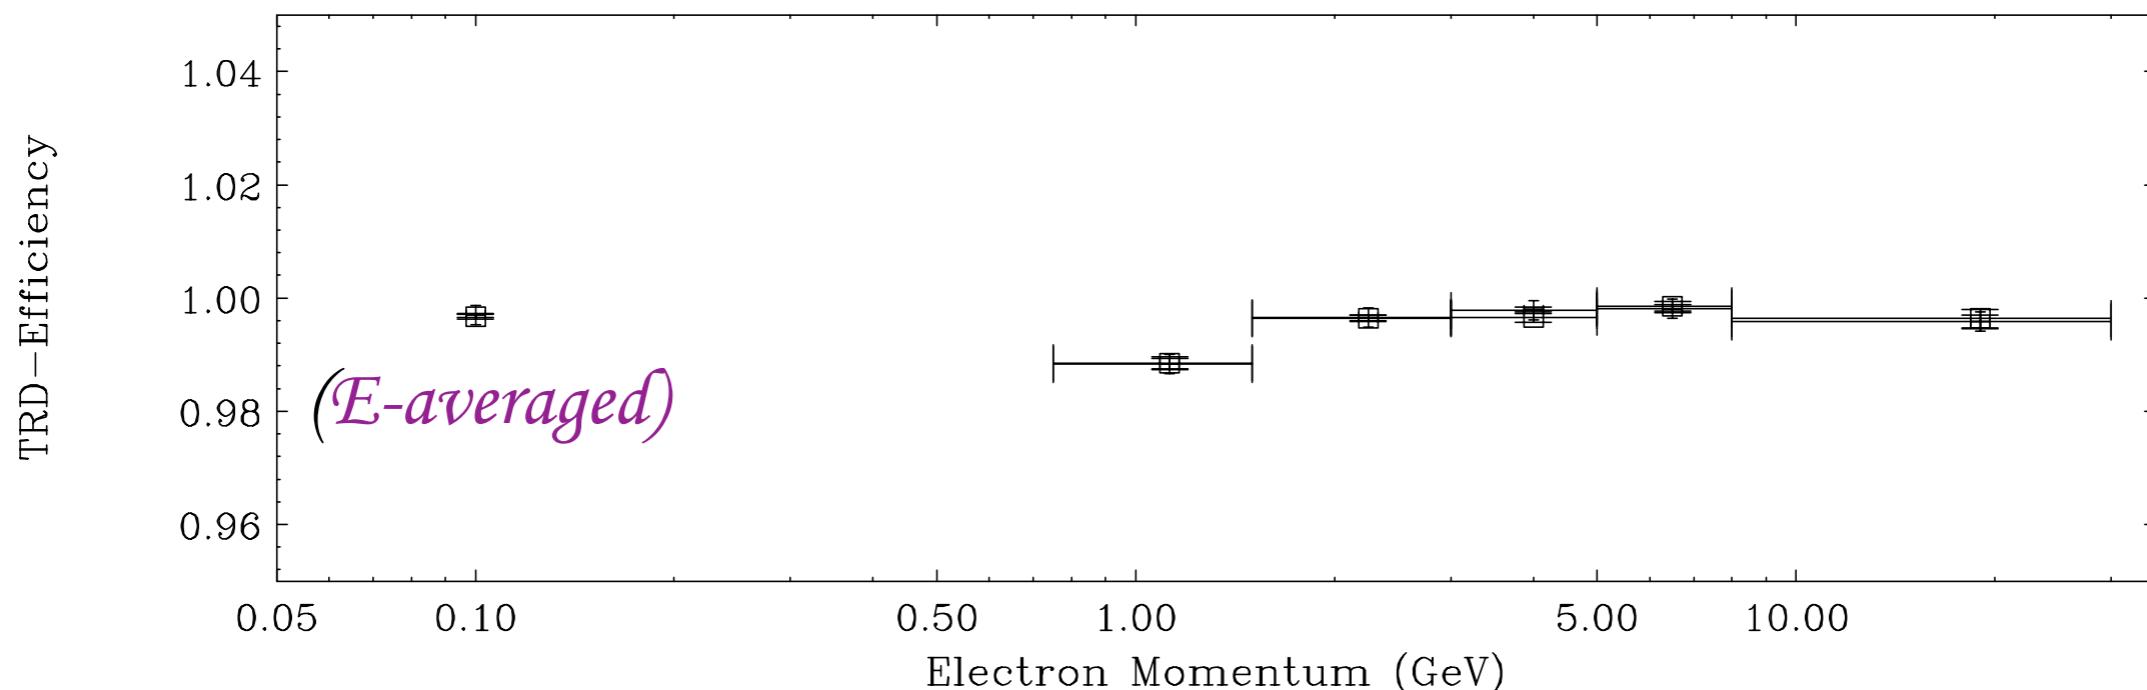

Conclusion \Rightarrow Data-Eff- e^- = MC-Eff- e^- at << 1%

Positive TRD-Efficiency[0.001]: Data(\square) –vs– MC(\pm)

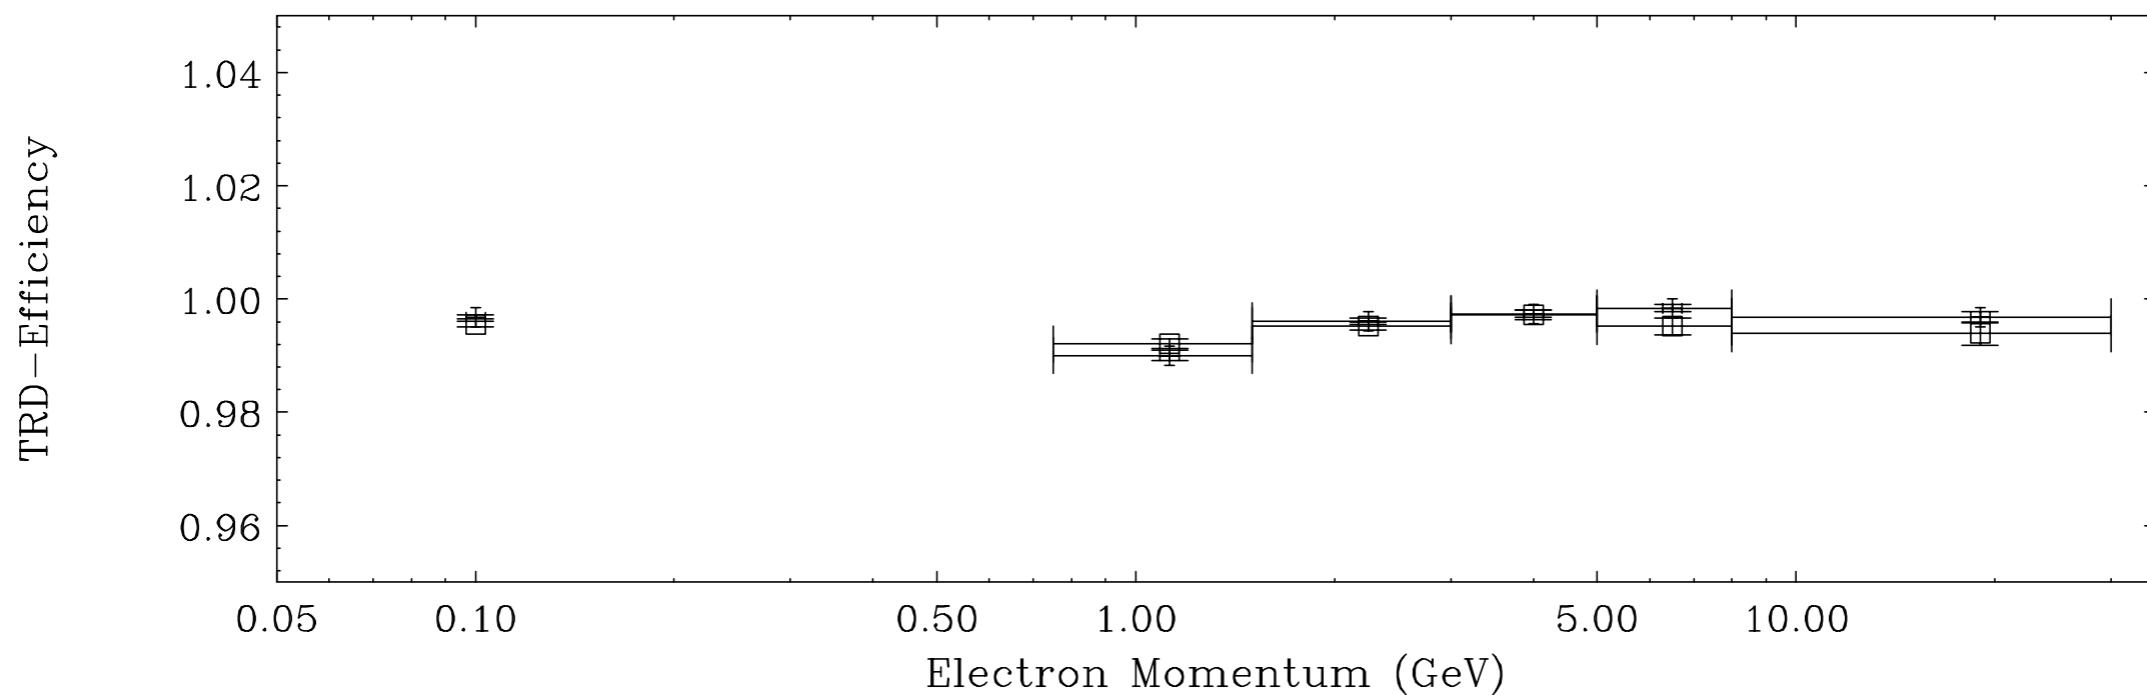

NOvA experience: EM-Shower-ID

* NOvA is a tracking calorimeter


- ⇒ Cell: 4cm(X) * 15.6m(Y) * 6.6cm(Z) [ND: 4.2m(Y)]
- ⇒ Longitudinal Sampling: $0.17X_0$ along the beam-direction (6.6cm)
- ⇒ Transverse Sampling: ~4cm alternating X/Y planes
- ⇒ Timing: 500 ns window in 10 μ s spill

versus

* FGT-ECAL

- ⇒ Cell: 2.5cm(X) * 4m(Y) * 20cm(Z)
- ⇒ Longitudinal Sampling: $0.3X_0$ along the beam-direction ($0.55X_0$ for Barrel)
- ⇒ Transverse Sampling: ~2.5cm alternating X/Y planes
- ⇒ Timing: ~1 ns Ecal-Cluster time-resolution in 10 μ s spill

* Use the μ -Removed Cosmic-Brem in FD

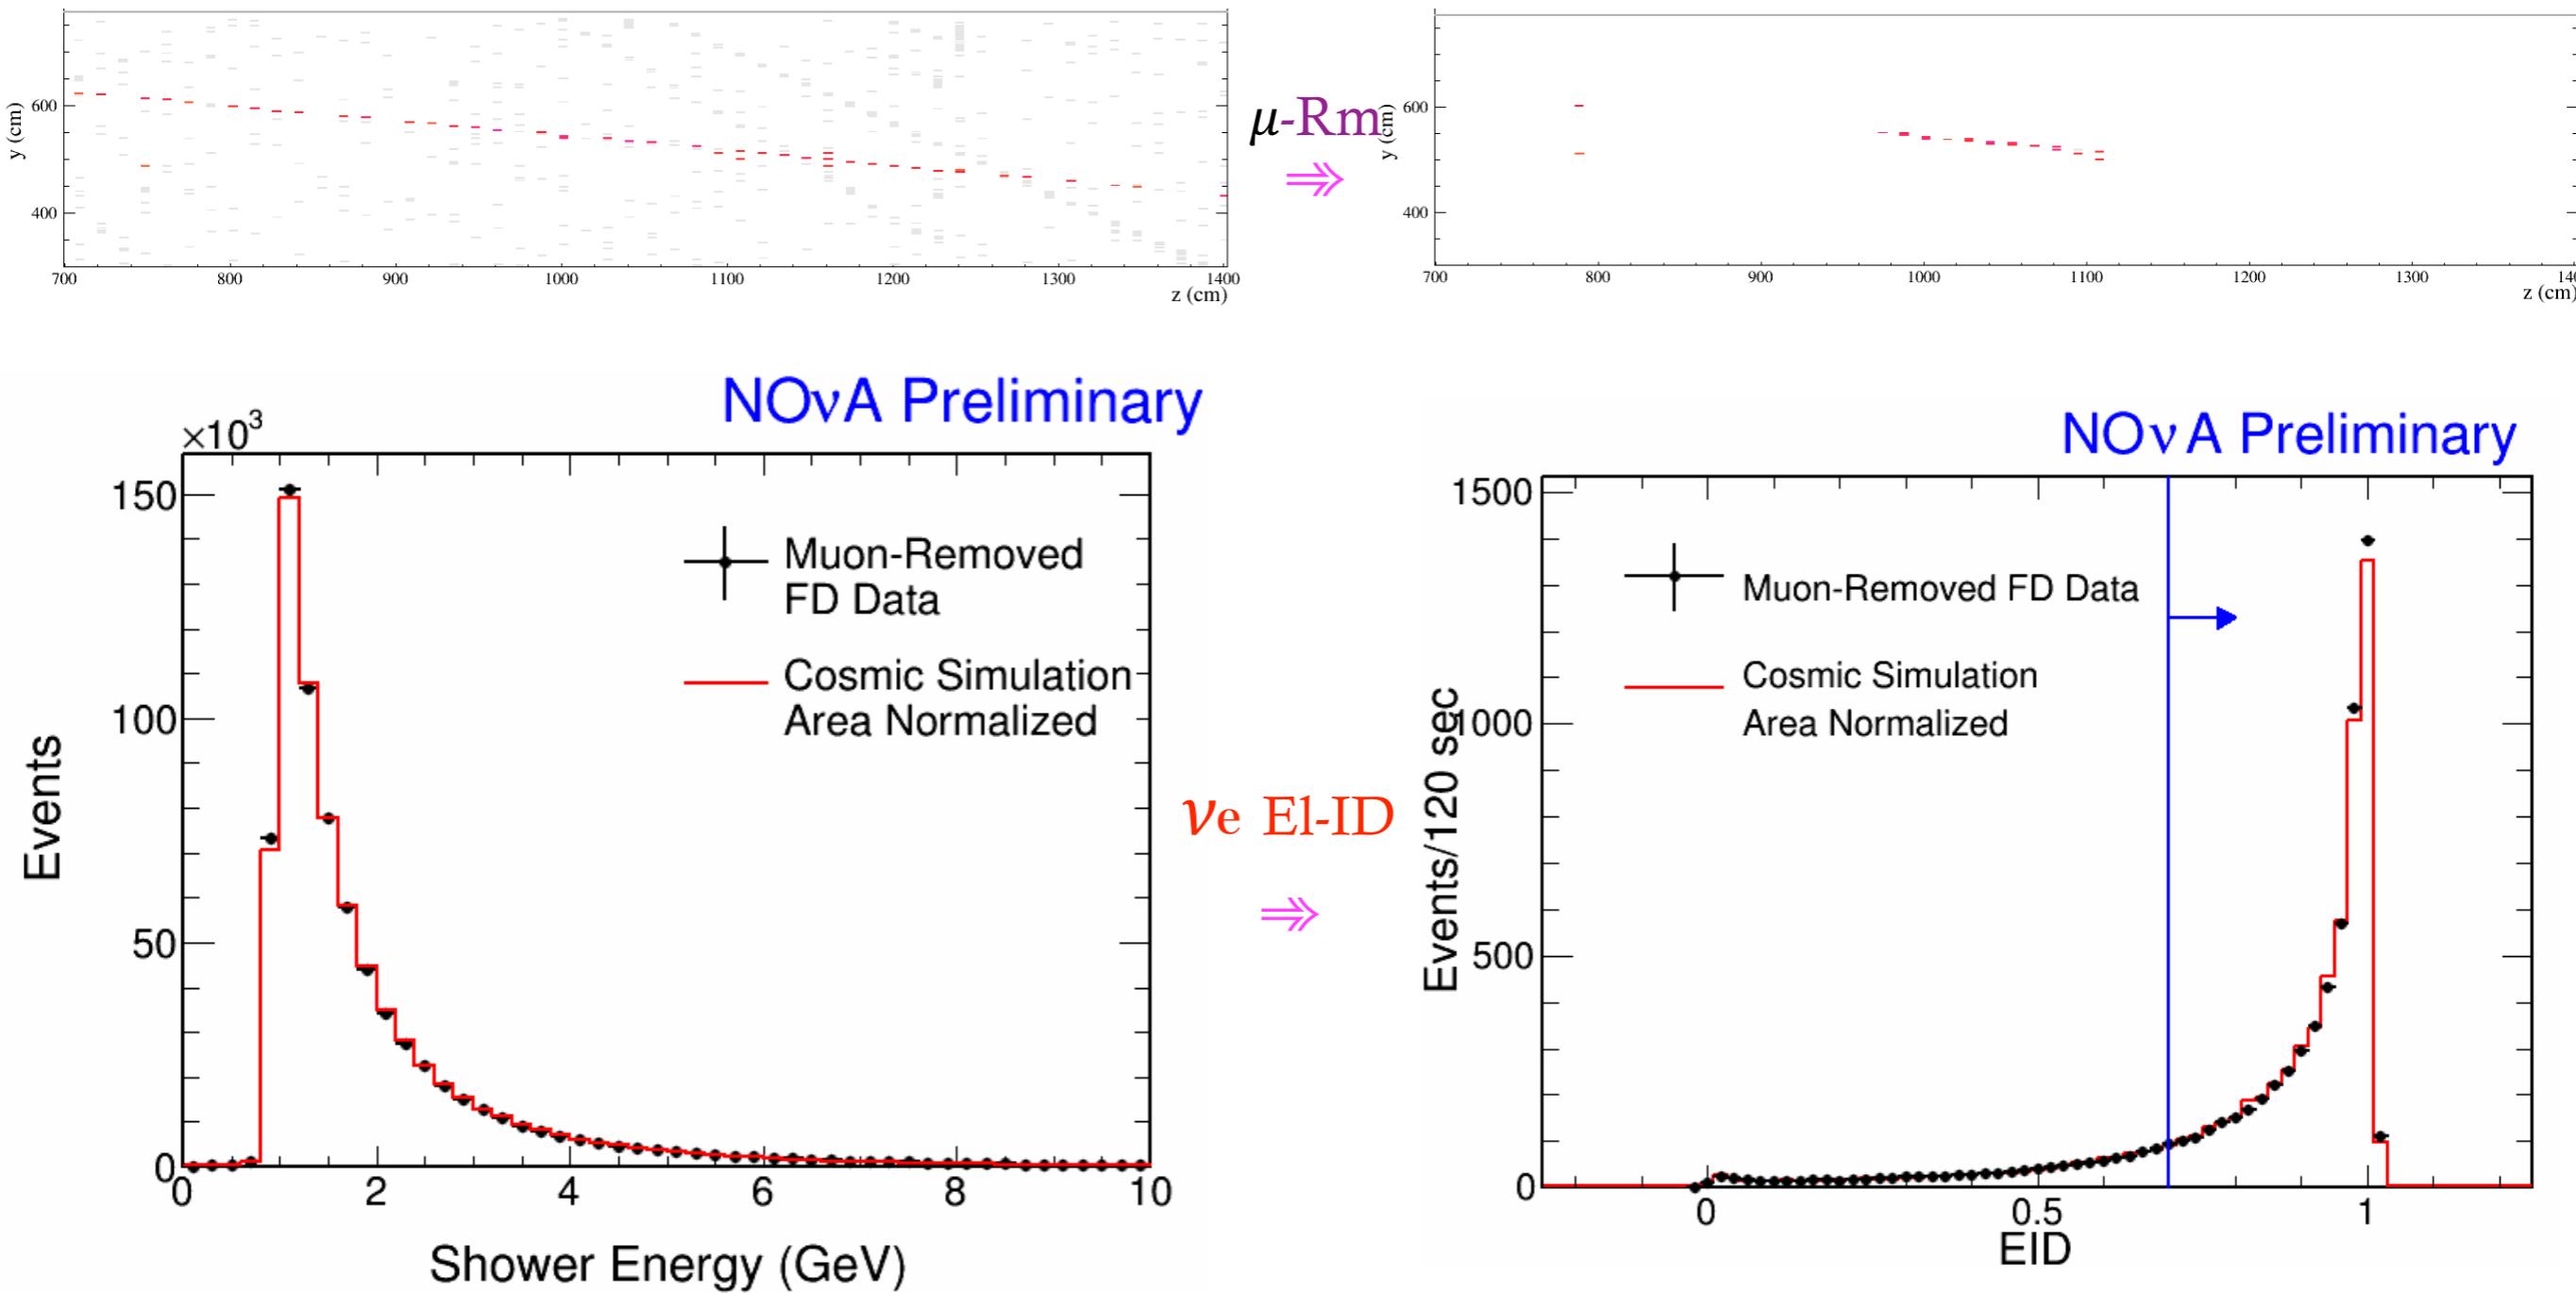

in situ Constraint on the Electron/ECal Energy Scale

*Measure π^0 produced in the ν -interactions

Expect $\sim \mathcal{O}(10M)$ reconstructed π^0 using γ -conversion and γ -clusters

Use π^0 mass, constrain the ECAL energy scale (*...see Figs.*)

*Measure K^0 produced in the ν -interactions

Expect $\sim \mathcal{O}(200k)$ reconstructed $K^0 \rightarrow \pi^0 \pi^0$ using γ -conversion and γ -clusters

Use sharp K^0 mass, constrain the ECAL energy scale


Measure $\eta \rightarrow \gamma \gamma$ produced in the ν -interactions (...see Fig.*)

Expect $\sim \mathcal{O}(0.4M)$ reconstructed η using γ -conversion and γ -clusters

Use sharp η mass, constrain the ECAL energy scale

π^0 Reconstruction using NOMAD Data (ν_μ -CC Sample)


(background: fit data excluding $80 < M\gamma\gamma < 170$ MeV)

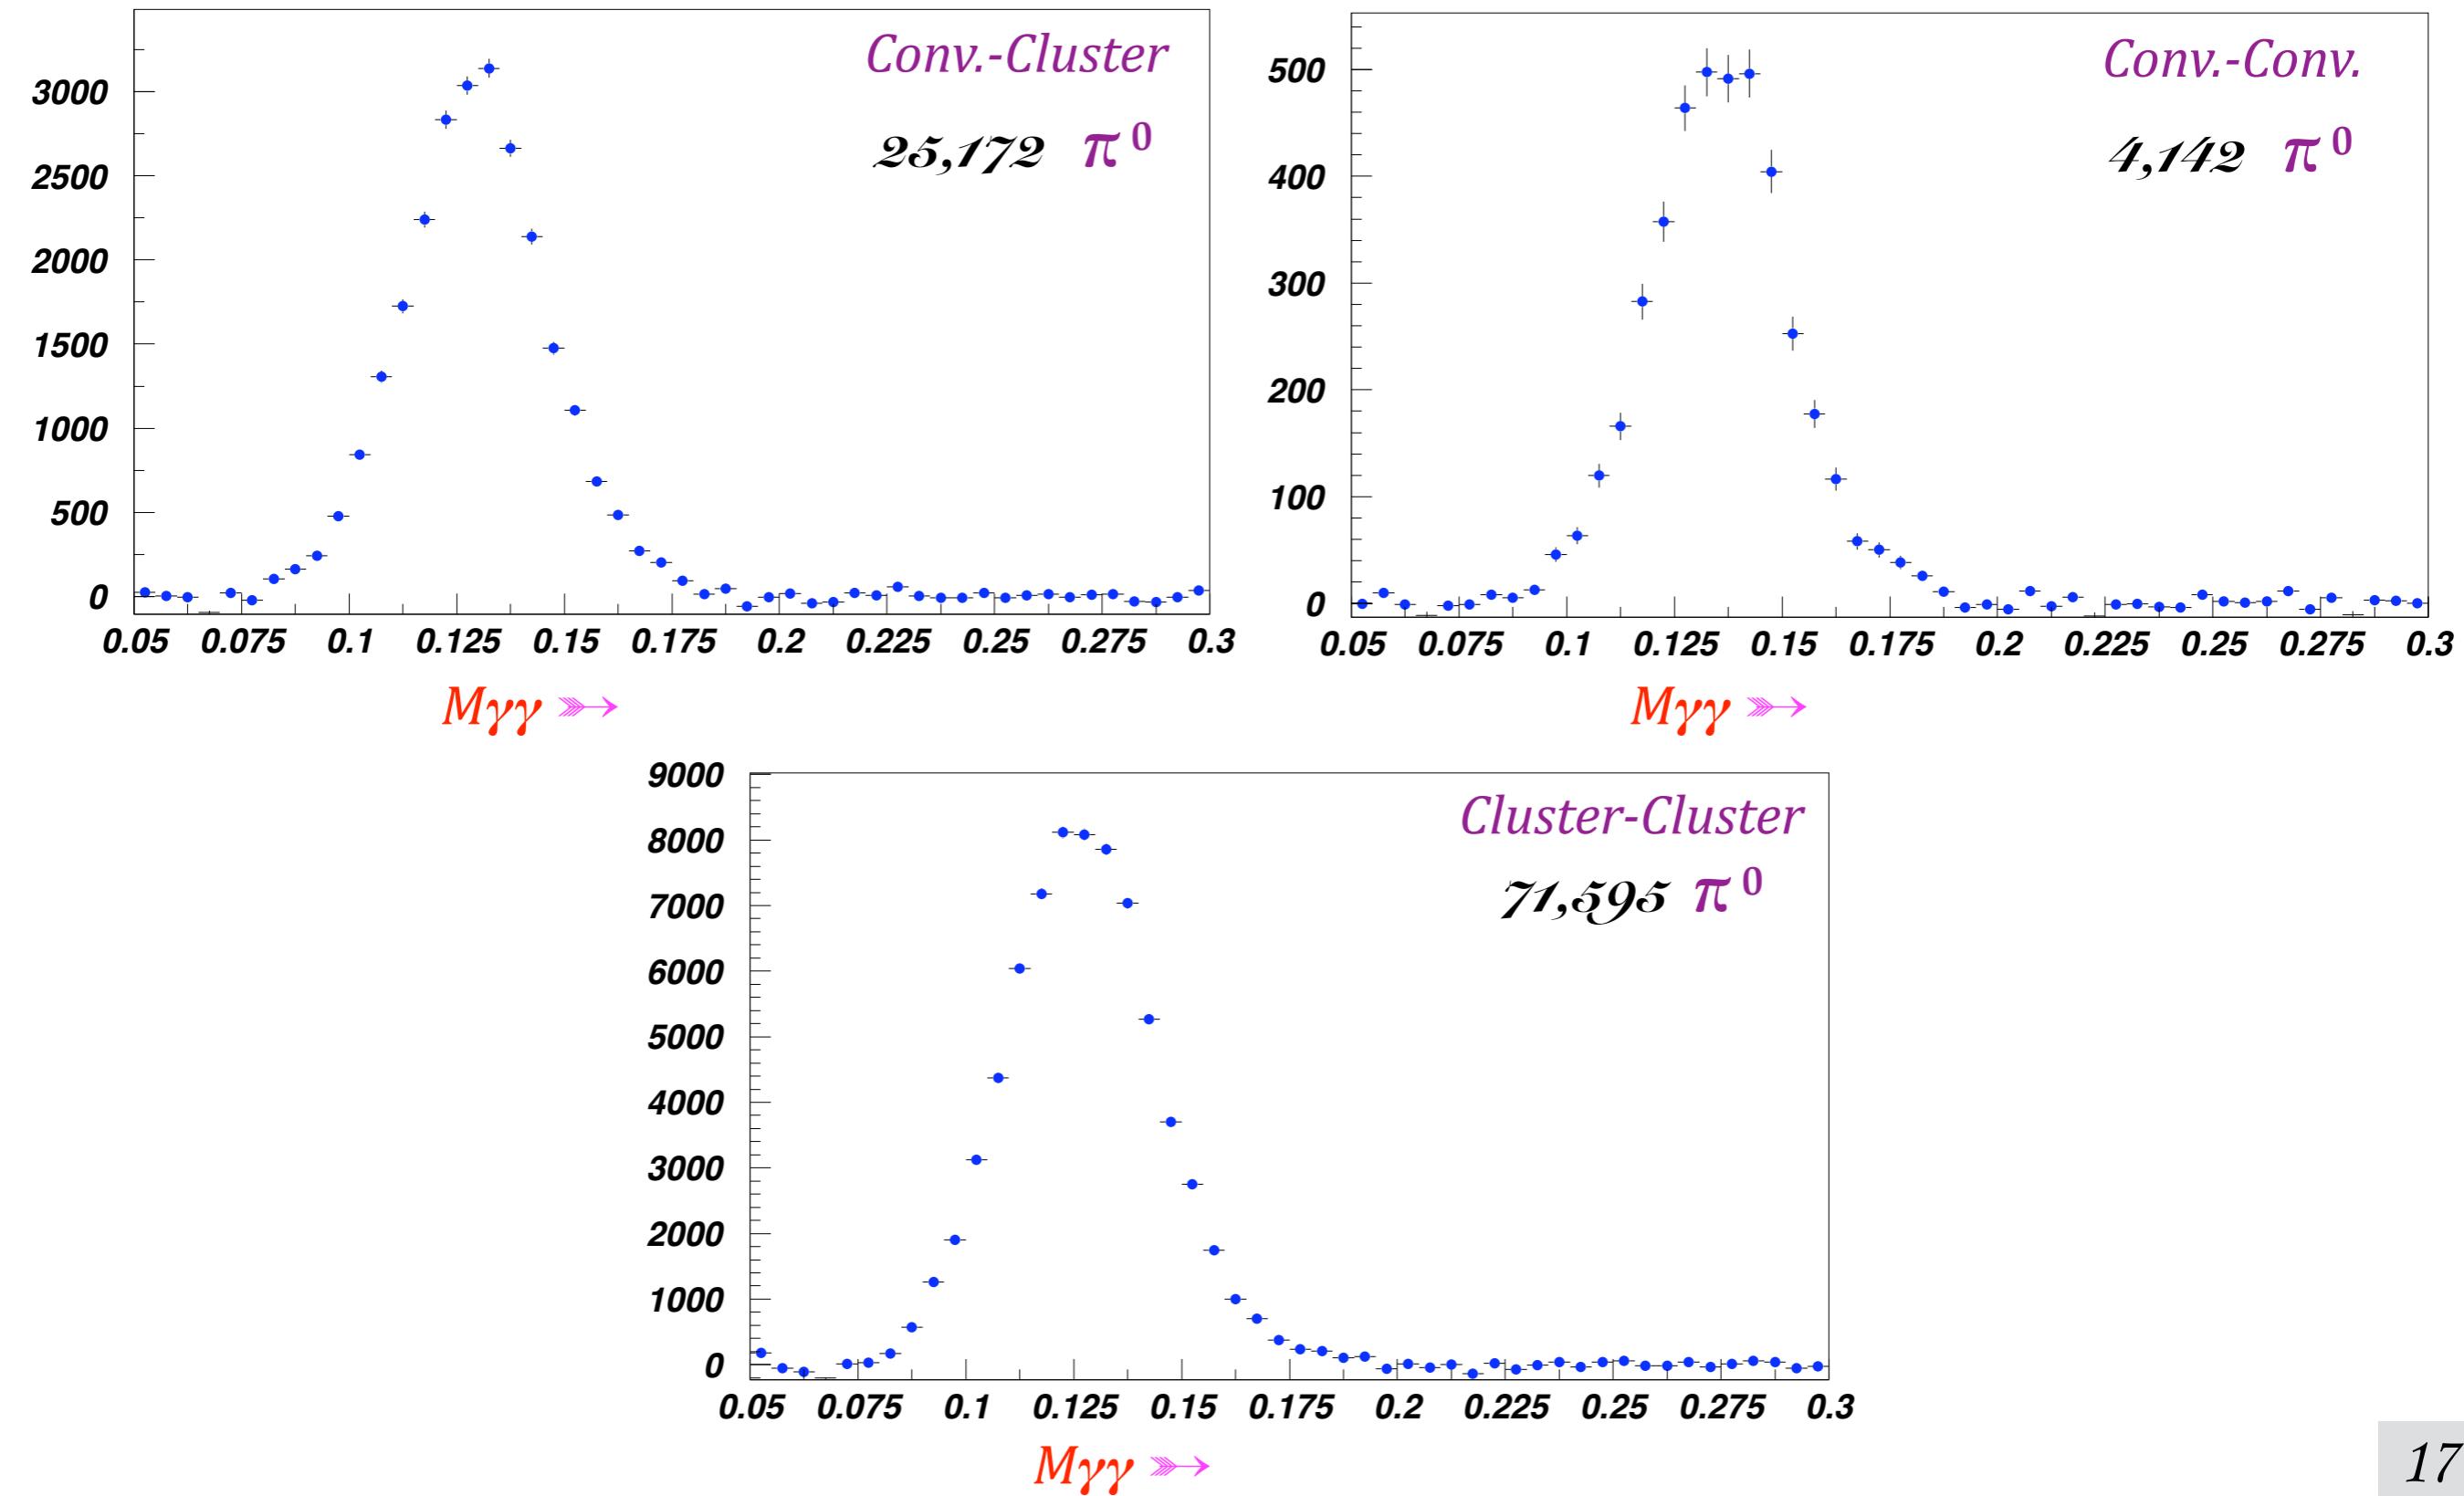

π^0 Reconstruction in NOvA ($NC \Leftrightarrow$ no- μ Sample)




Constraint on the EM-energy Scale

NOvA Preliminary

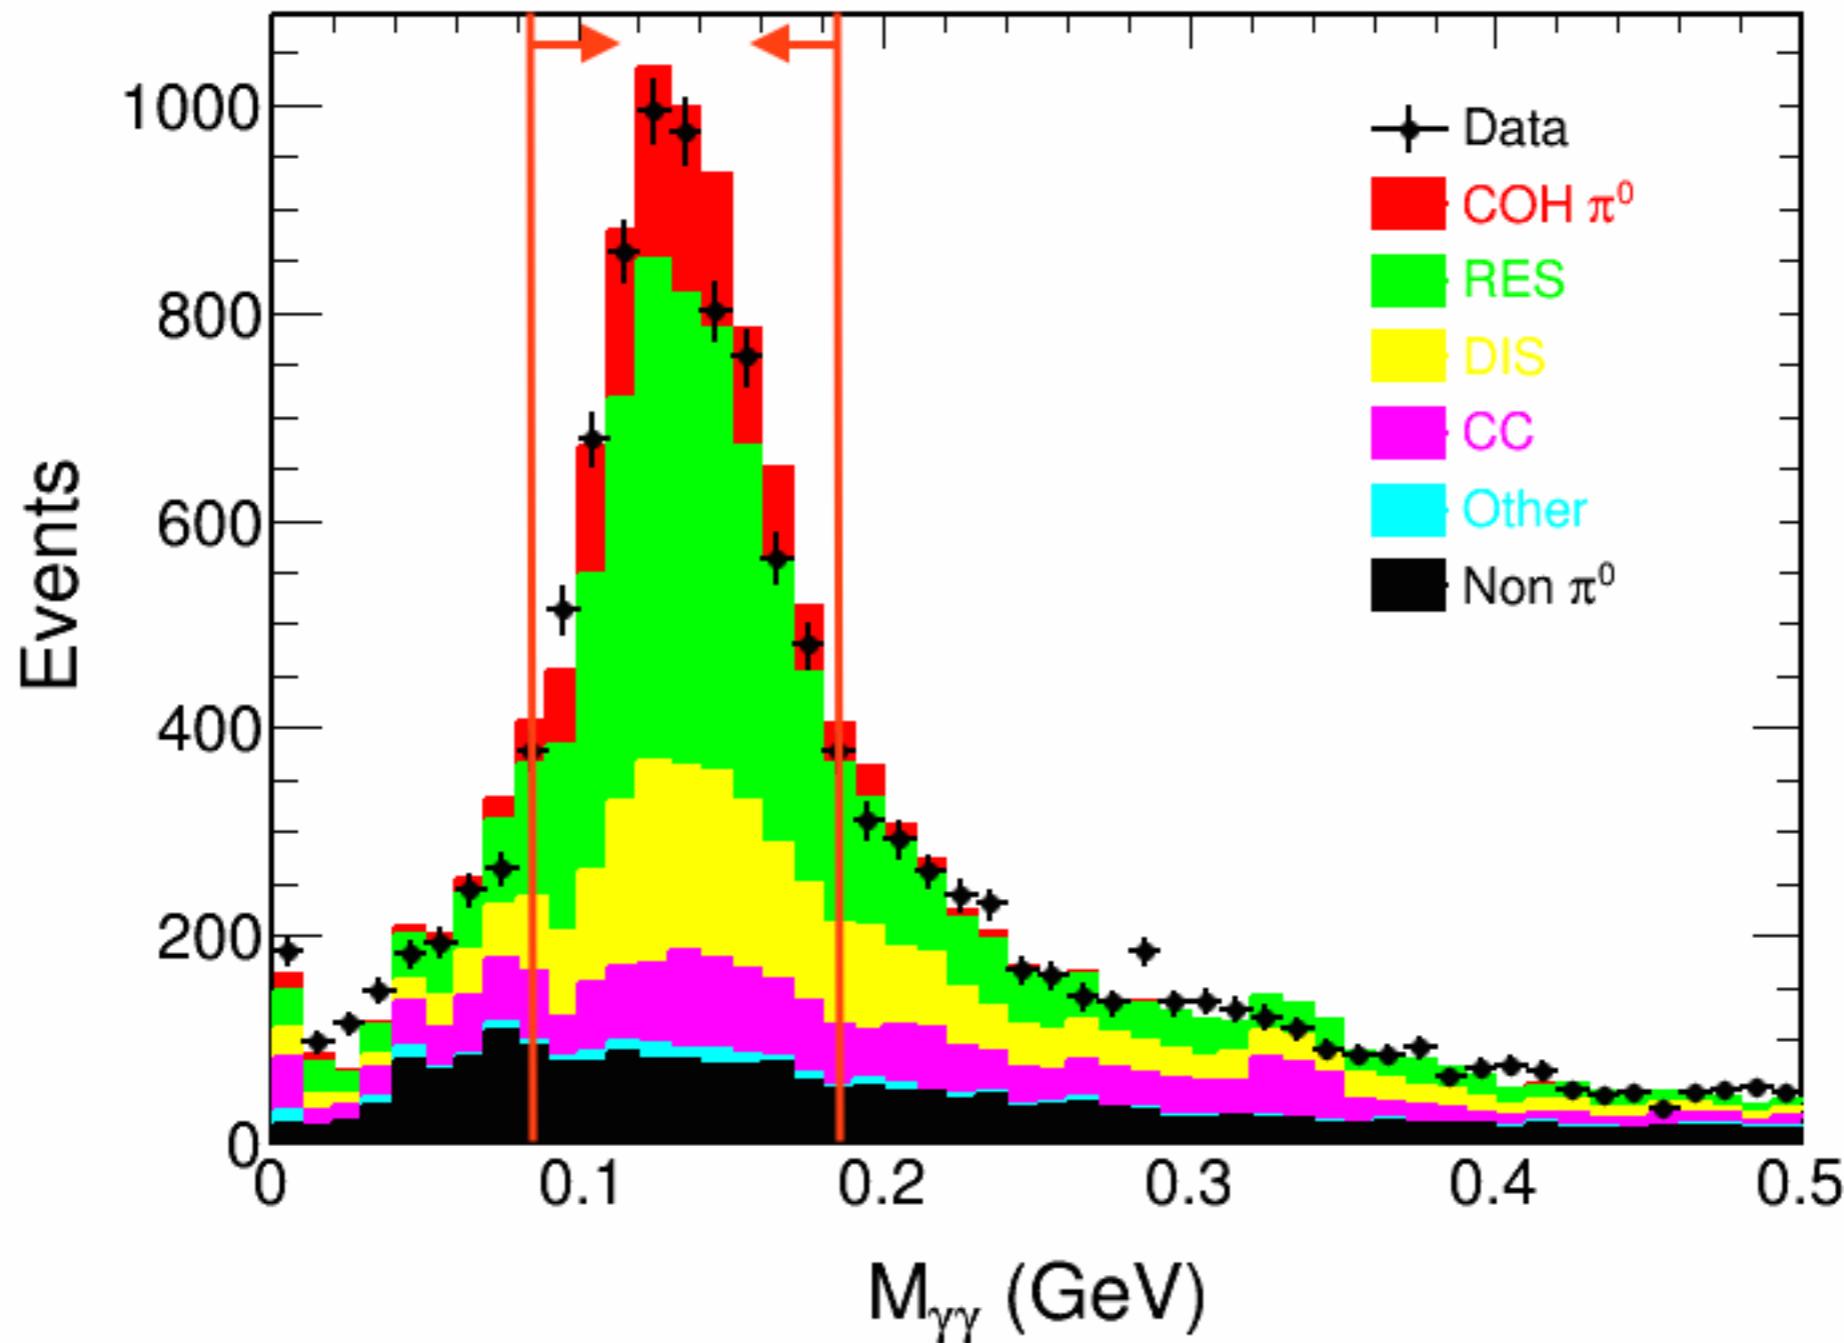

η Reconstruction using NOMAD Data (ν_μ -CC Sample)

(background: fit data excluding $475 < M_{\gamma\gamma} < 625$ MeV)

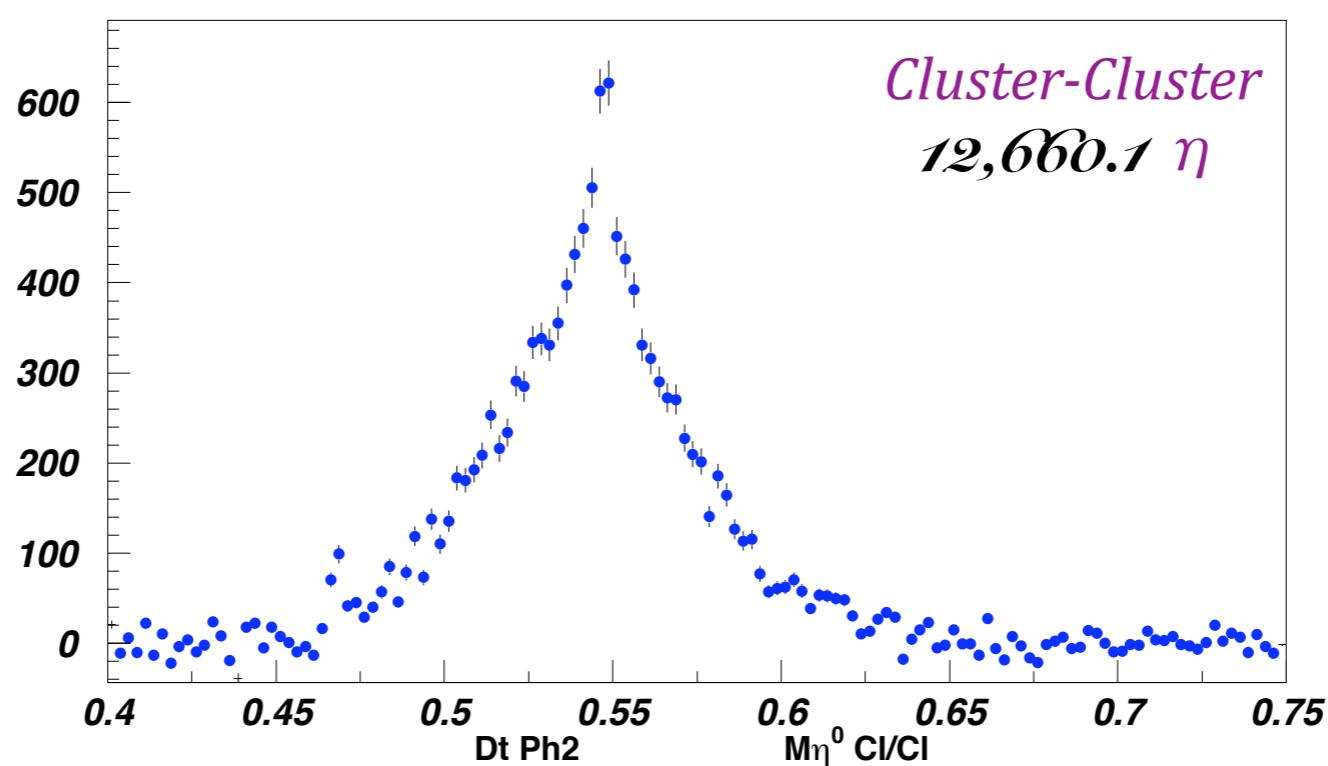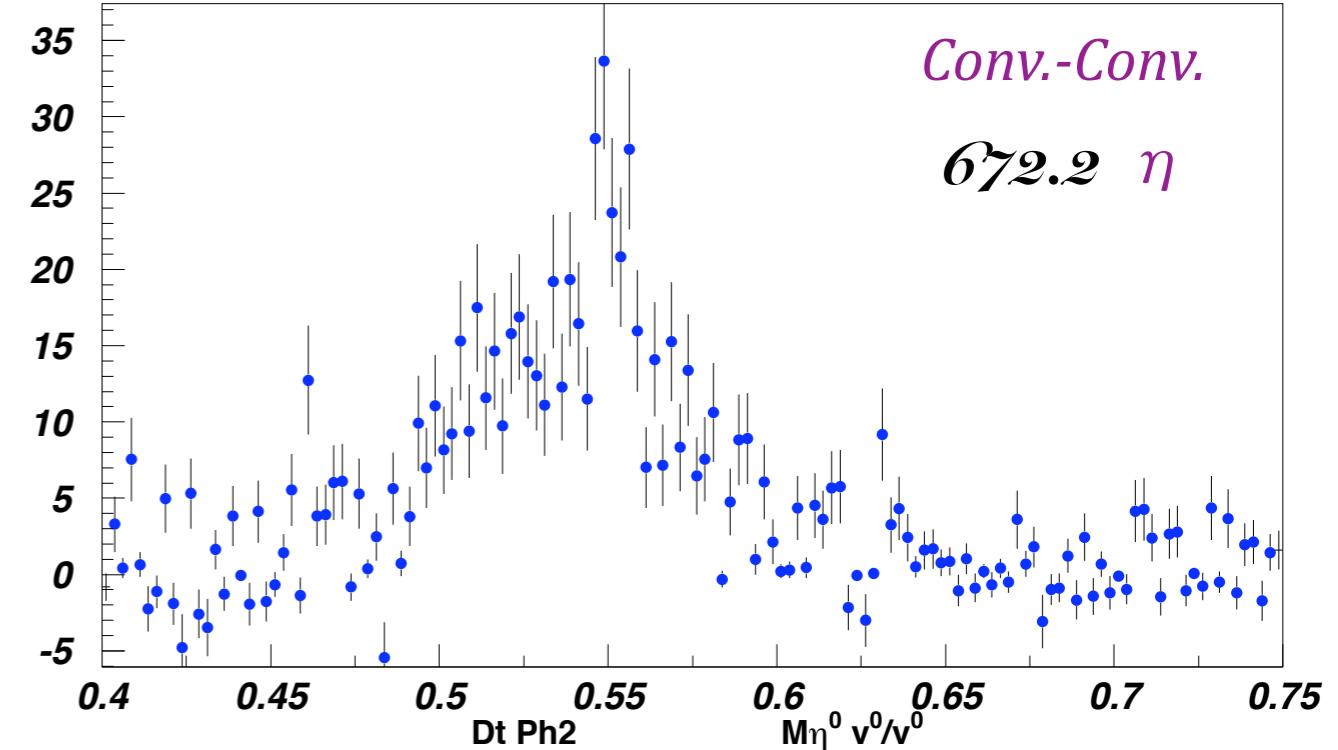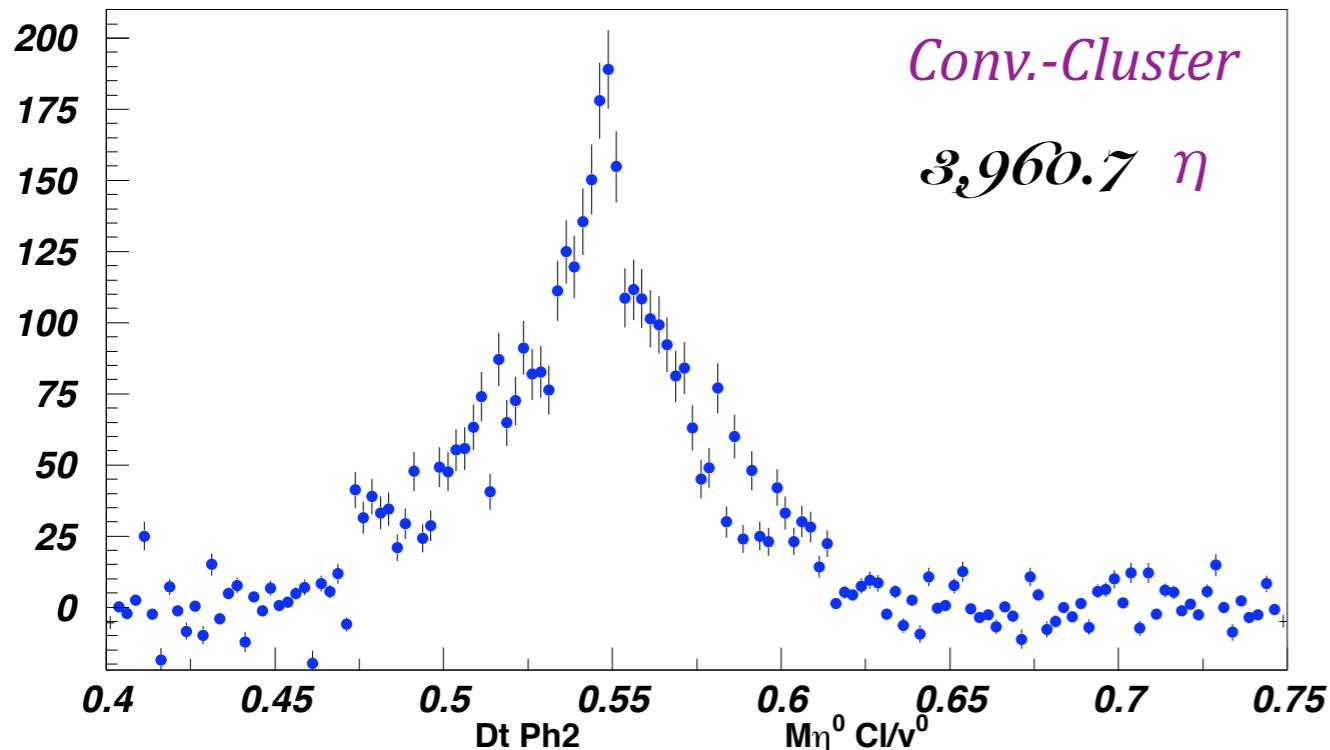

Summary/Outlook: Electron Measurement in FGT ... in progress

(1) 100% distinction between e^- .vs. e^+ in $\sim 0.3 - 50 \text{ GeV}$

(3) Measure **Pe** in STT

- ⇒ Direction-cosines using the track-fit
- ⇒ Resolution of $|Pe| \sim 12\%$ using curvature
- ⇒ Resolution of $|Ee| \sim 6\%/\sqrt{Ee}$
- ⇒ Resolution of $\theta_e \sim 3 \text{ mrad} (3 \text{ GeV } e^-)$

(4) Electron-ID measurement via

- ⇒ TR (Transition Radiation) in STT
- ⇒ Shower-shape in ECAL
- ⇒ Pattern of Energy-Loss (track-fit) in STT

(5) in situ constraints on the electron-ID efficiency using e^+/e^- tracks originating from the reconstructed $\gamma \rightarrow e^+e^-$

(6) in situ constraints on the electron-energy using reconstructed

- ⇒ $\sim \mathcal{O}(10M) \pi^0$ using γ -conversion and γ -clusters
- ⇒ $\sim \mathcal{O}(200k) K^0 \rightarrow \pi^0 \pi^0$ & $\sim \mathcal{O}(400k) \eta \rightarrow \gamma \gamma$

Backup