




WA105/ProtoDUNE-DP

Charge Readout Plane Design

WA105 – protoDune-DP Technical Review – 07th of April 2020


B.Aimard, G.Deleglise, D.Duchesneau, N.Geffroy, J-M.Nappa, F.Peltier, S.Vilalte

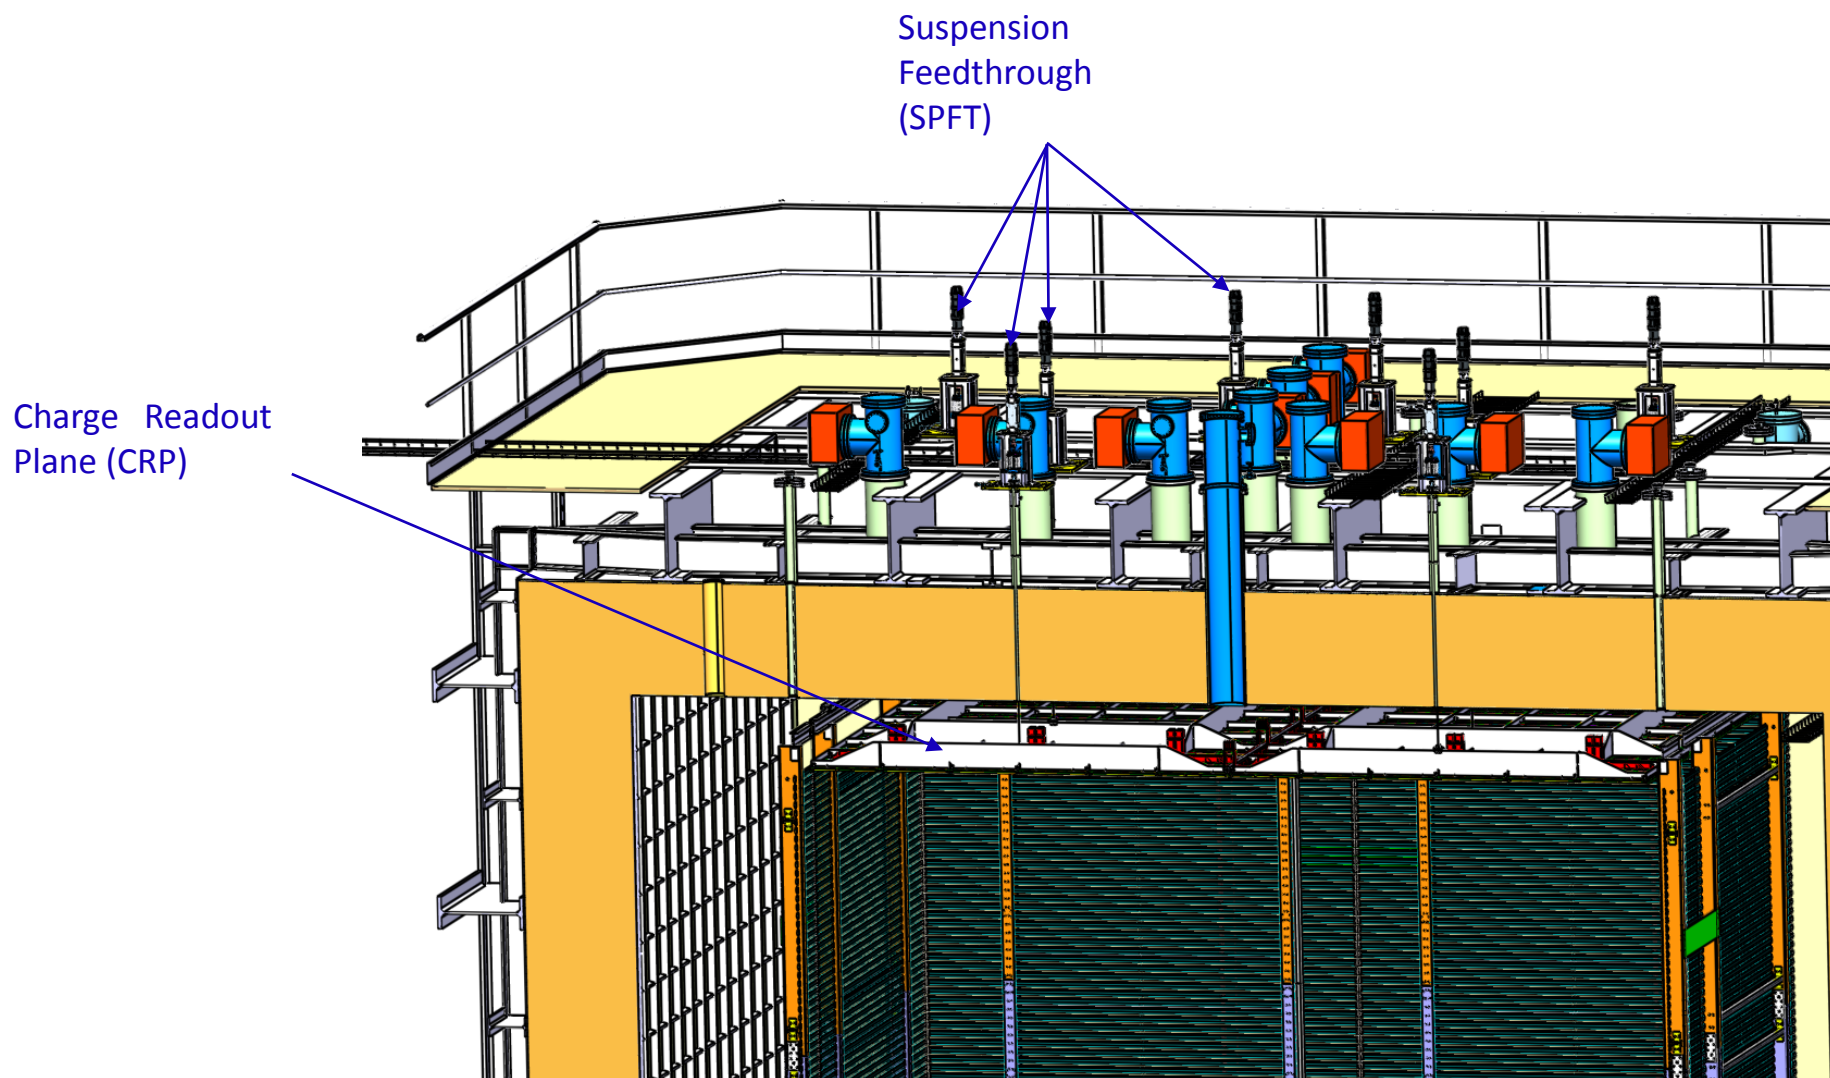

- *Mechanical specifications of the plane :*


- ***In planarity***

- Specified planarity tolerance on the LEM plane is $\pm 0,5\text{mm}$




- ***In positioning***

- Specified altitude tolerance is $\pm 0,05\text{mm}$




- ***In detection surface***


- Minimize inter-space into 6x6m, **max. 10mm**




- ***Be transportable and installable...***

- Design of WA105 must be *scalable and re-usable for DUNE*

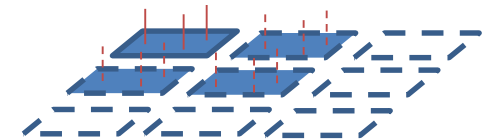

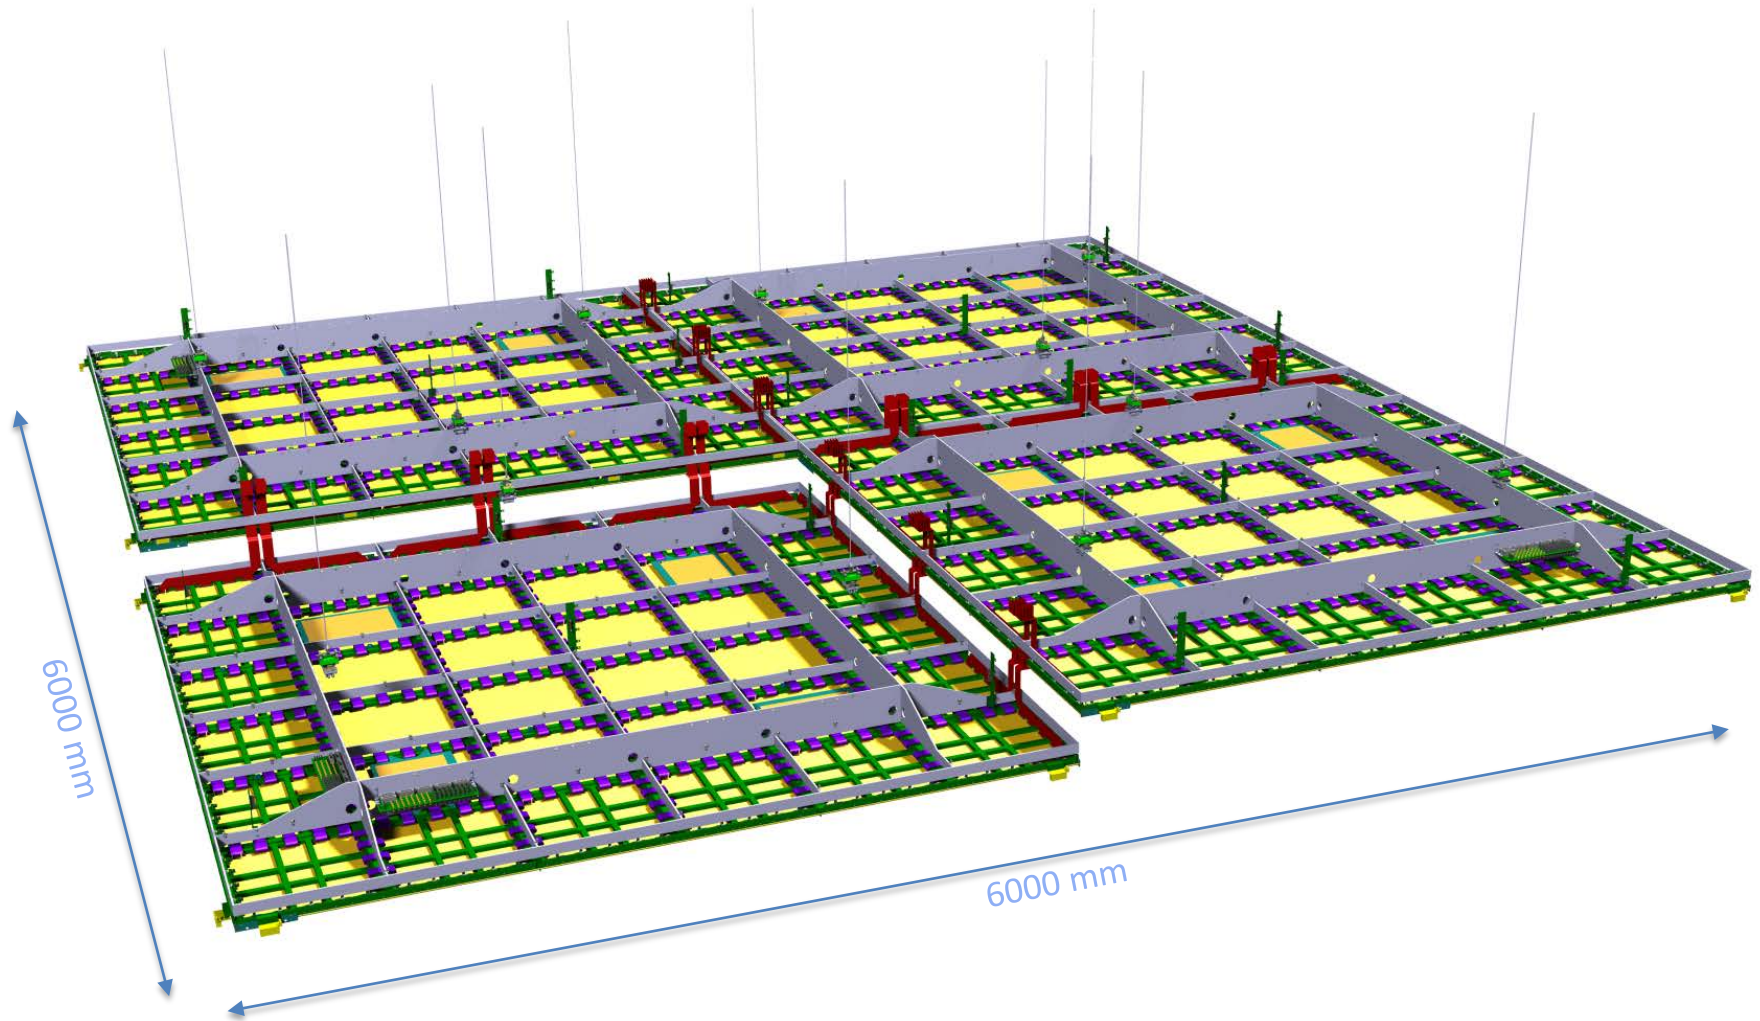

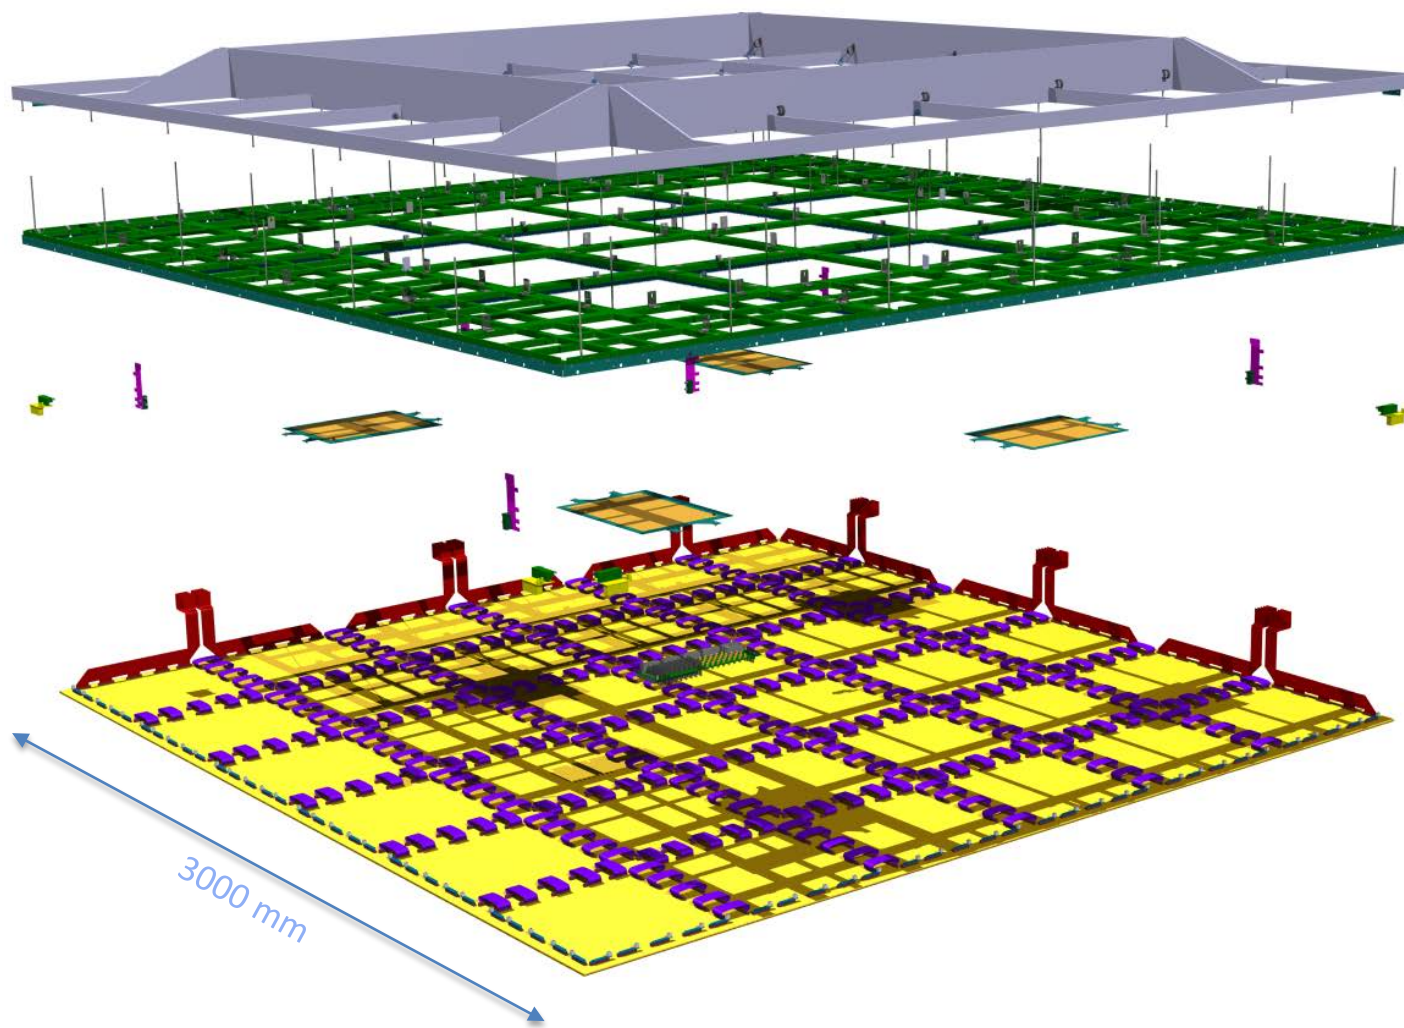


Invar Frame


G10 Frame +
Extraction Grid

Instrumentation


Detection plane
LAS assembly

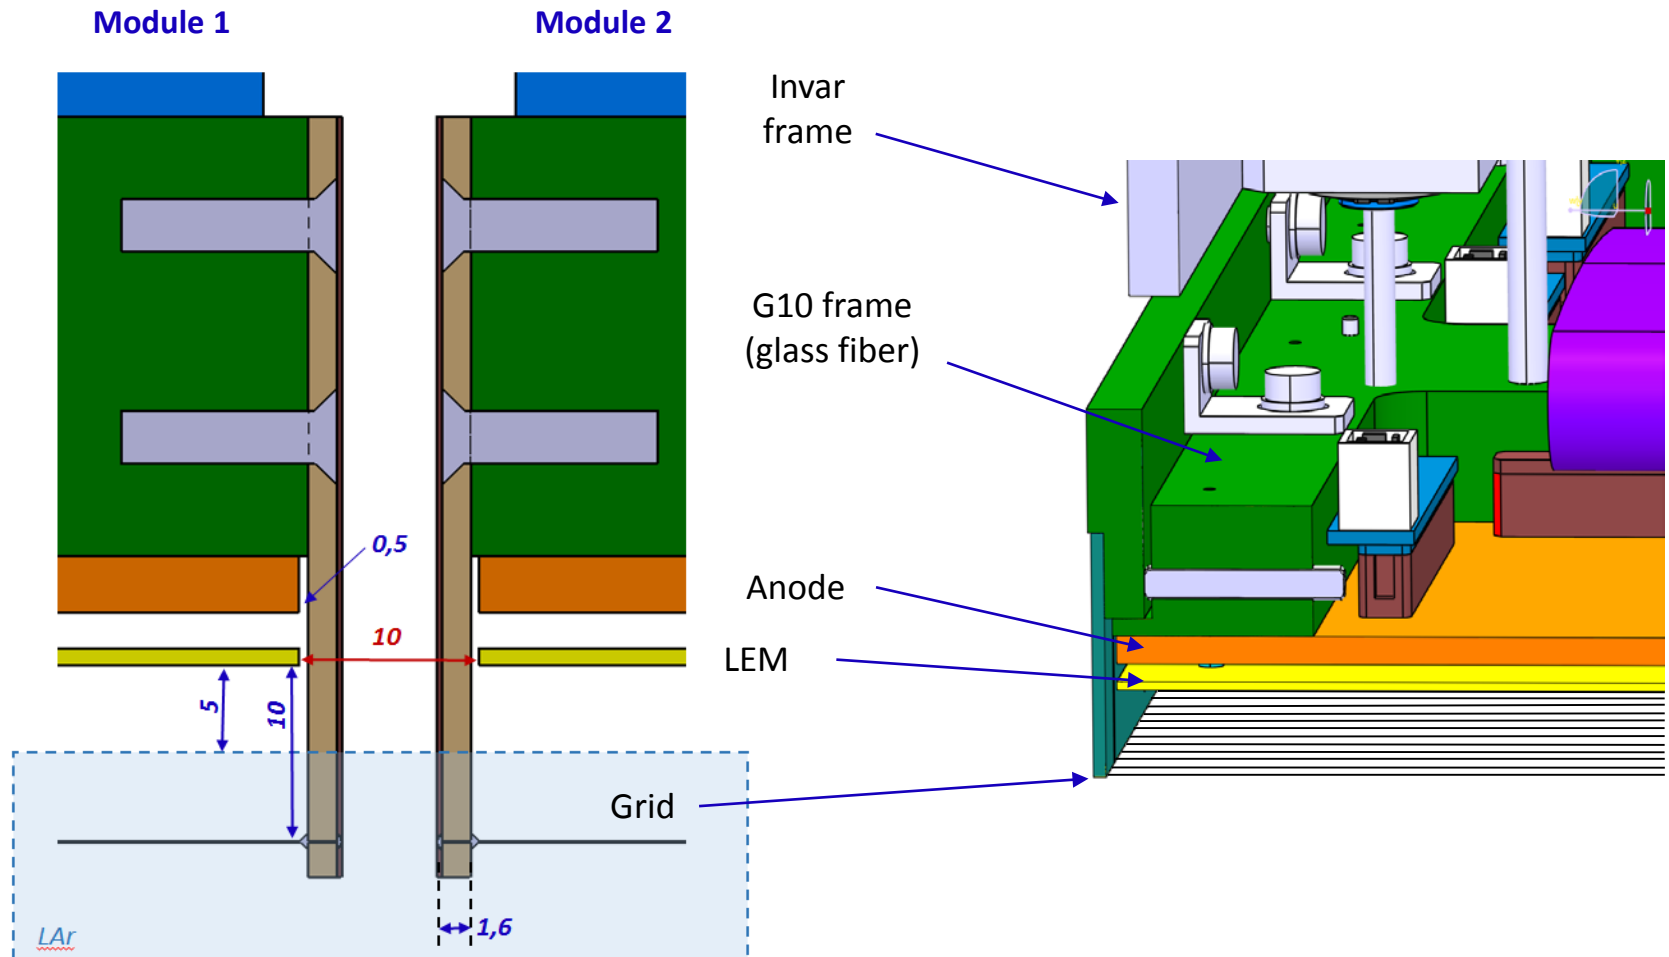


- Invar frame is the skeleton of the module
- All the frames are identical

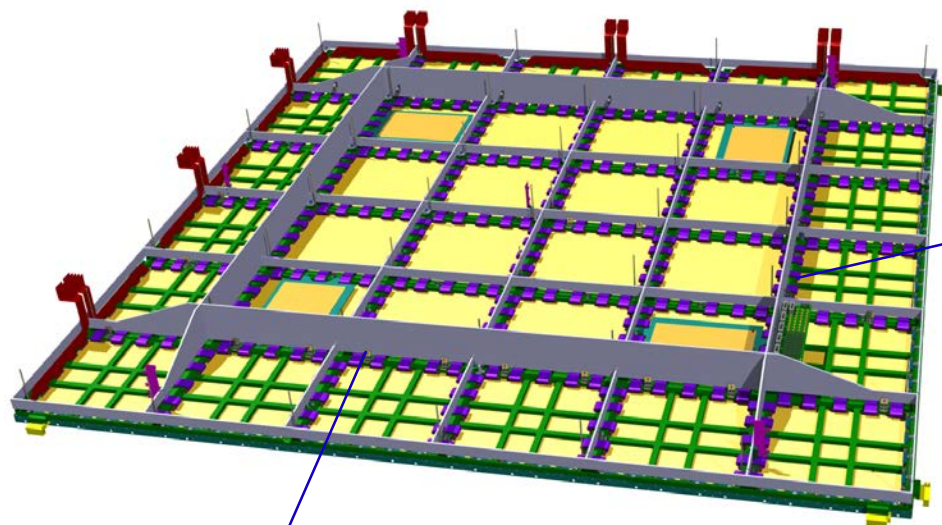

Stainless steel adaptable Cable fixations all around the frame


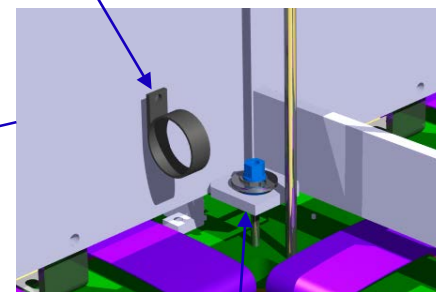


Supporting plates for thermal decoupling and planarity tuning welded on the frame


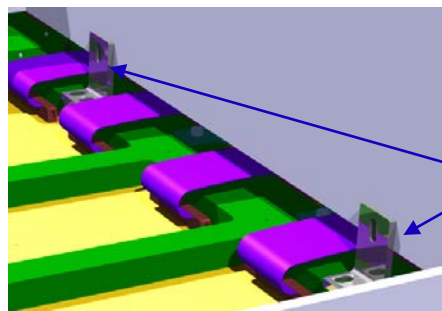


Square supports between invar and G10 for final assembly transportation

- Bending of a stainless steel frame due to temperature gradient in GAR.

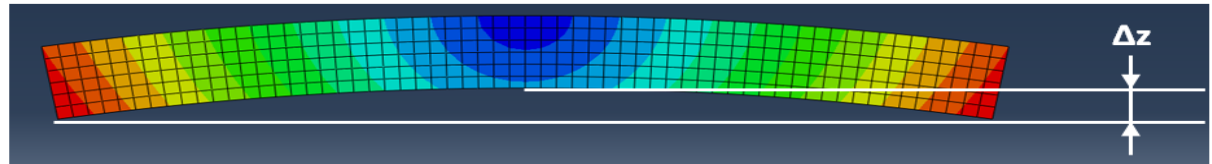

$\Delta z = 0,5$
mm



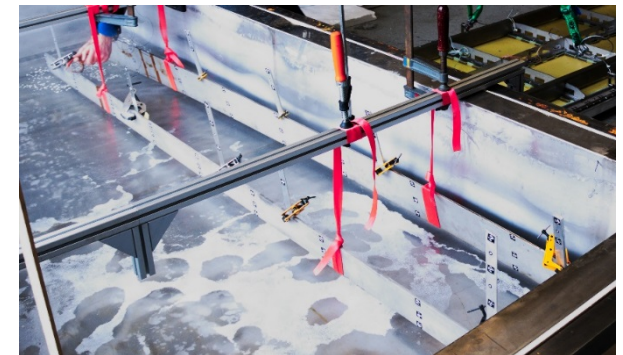
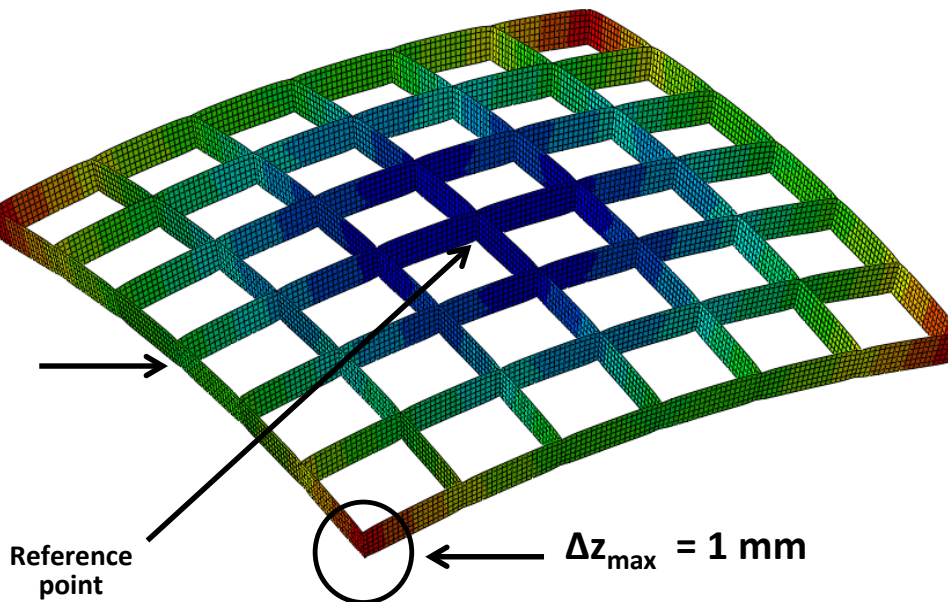


Thermal Δz_{\max} allowed per plate = 0,5 mm
 Measured with a cold bath test Δz_{\max} on a real 150mm plate = 2,1 mm

- INVAR for WA105,
- ProtoDUNE feedback (Temp. gradient measurements) will help for final DUNE design


- 3x3m frame is an assembly of 1x1m frames
- Only 3 types of 1x1m frames

Junction between 1x1m frames :

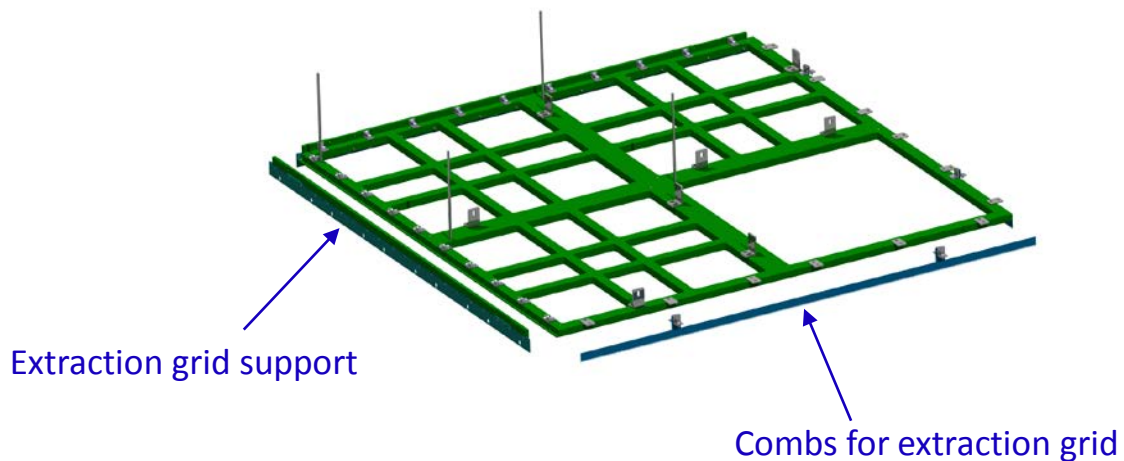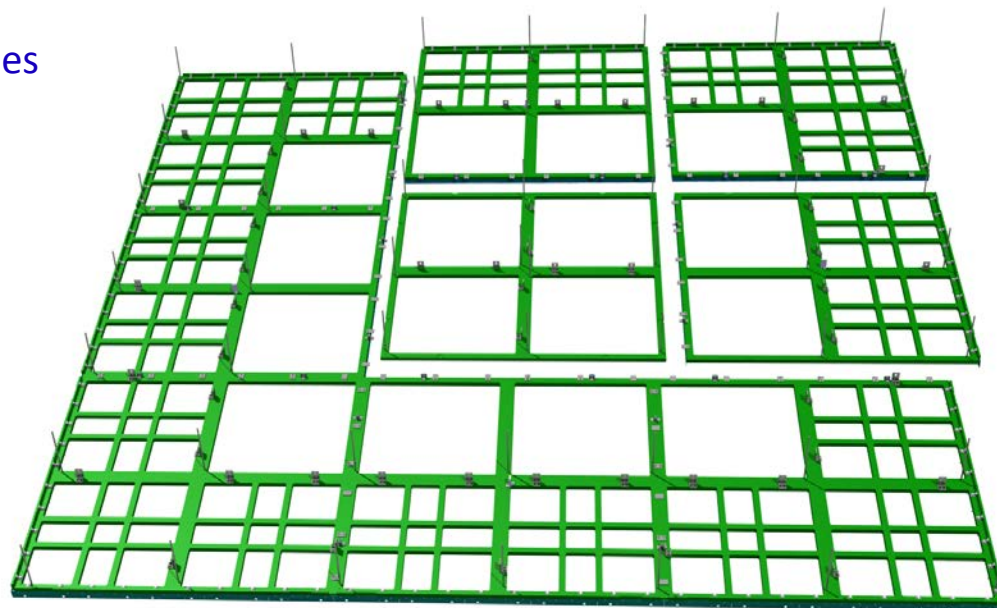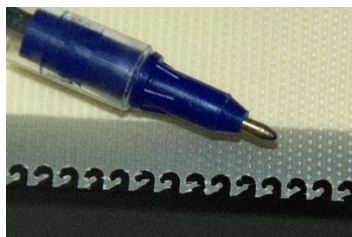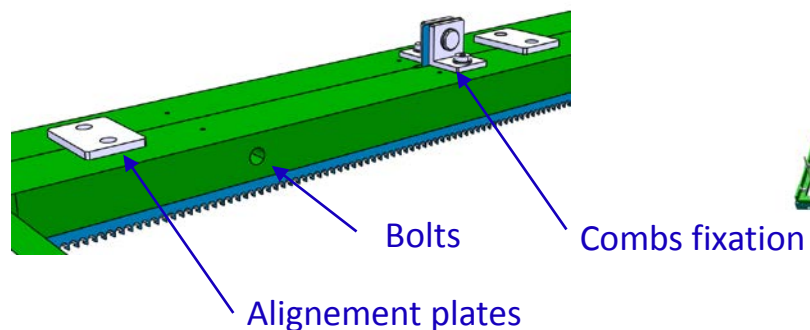

- Study has been performed by Cryolab to know contraction coefficients

https://edms.cern.ch/ui/file/1557852/1/LAPP_G10_rapport.pdf

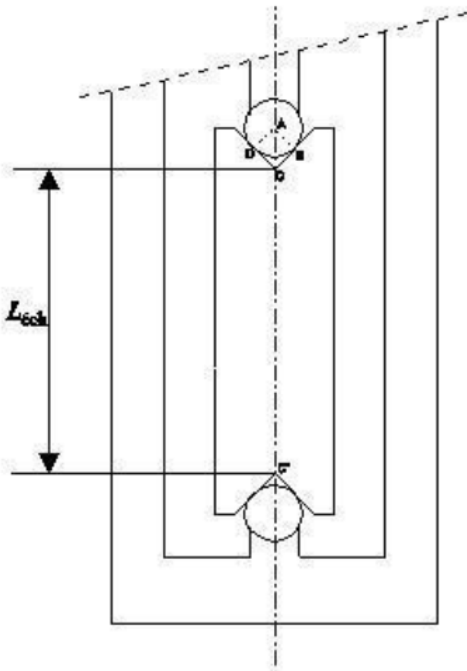


Tests from **CRYOLAB** on G10
(Vetronit EGS 102 from Von Roll)

$$\alpha_1 = 7,2 \cdot 10^{-6} \text{ K}^{-1}$$

$$\alpha_2 = 9,3 \cdot 10^{-6} \text{ K}^{-1}$$

$$\alpha_3 = 33,5 \cdot 10^{-6} \text{ K}^{-1}$$


Thoses values are supposed to be close to the LEM-Anode sandwich (LAS) one,
so G10 thermal behavior is similar to LAS

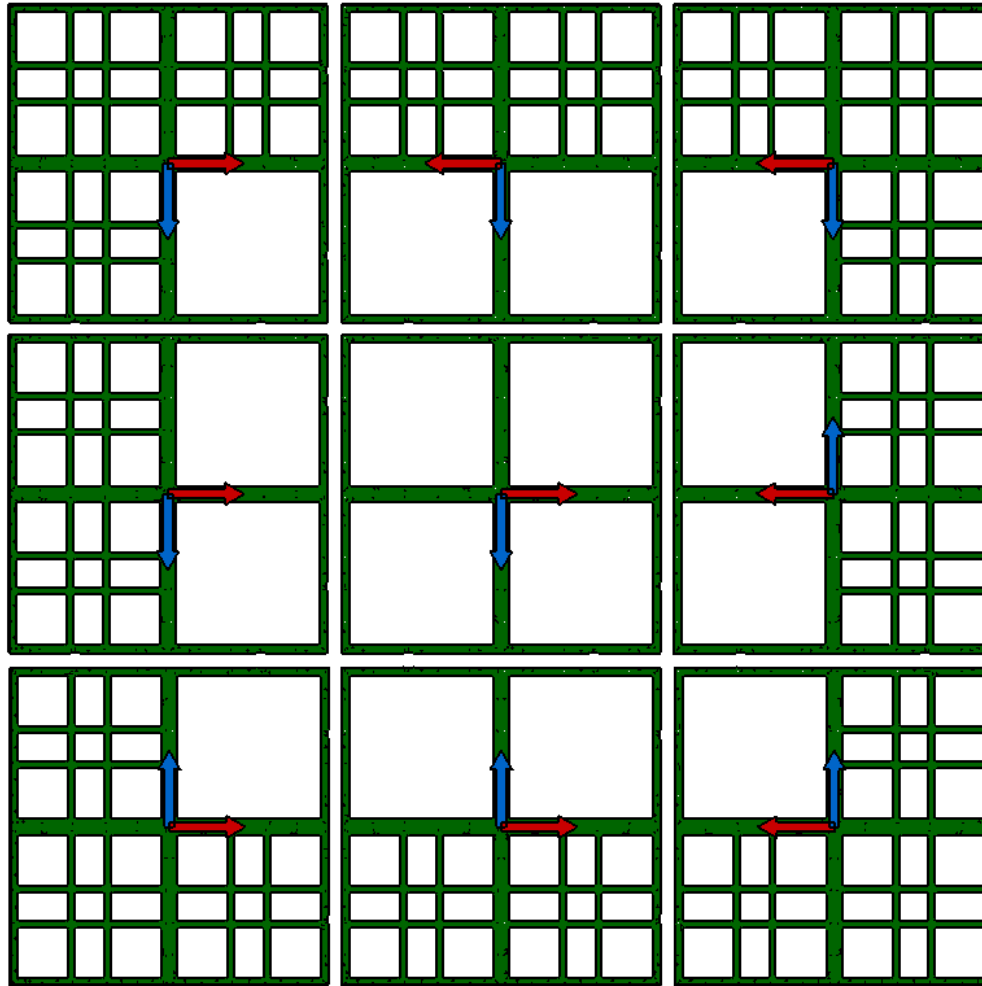

Three different patterns :




- « Cadre_G10_T1 » for angles
- « Cadre_G10_T2 » for face centers
- « Cadre_G10_T3 » for center

- Fibers directions are matched to insure harmony in thermal shrinkage
 - Two versions of each pattern
 - Supporting bars and combs follow same rule

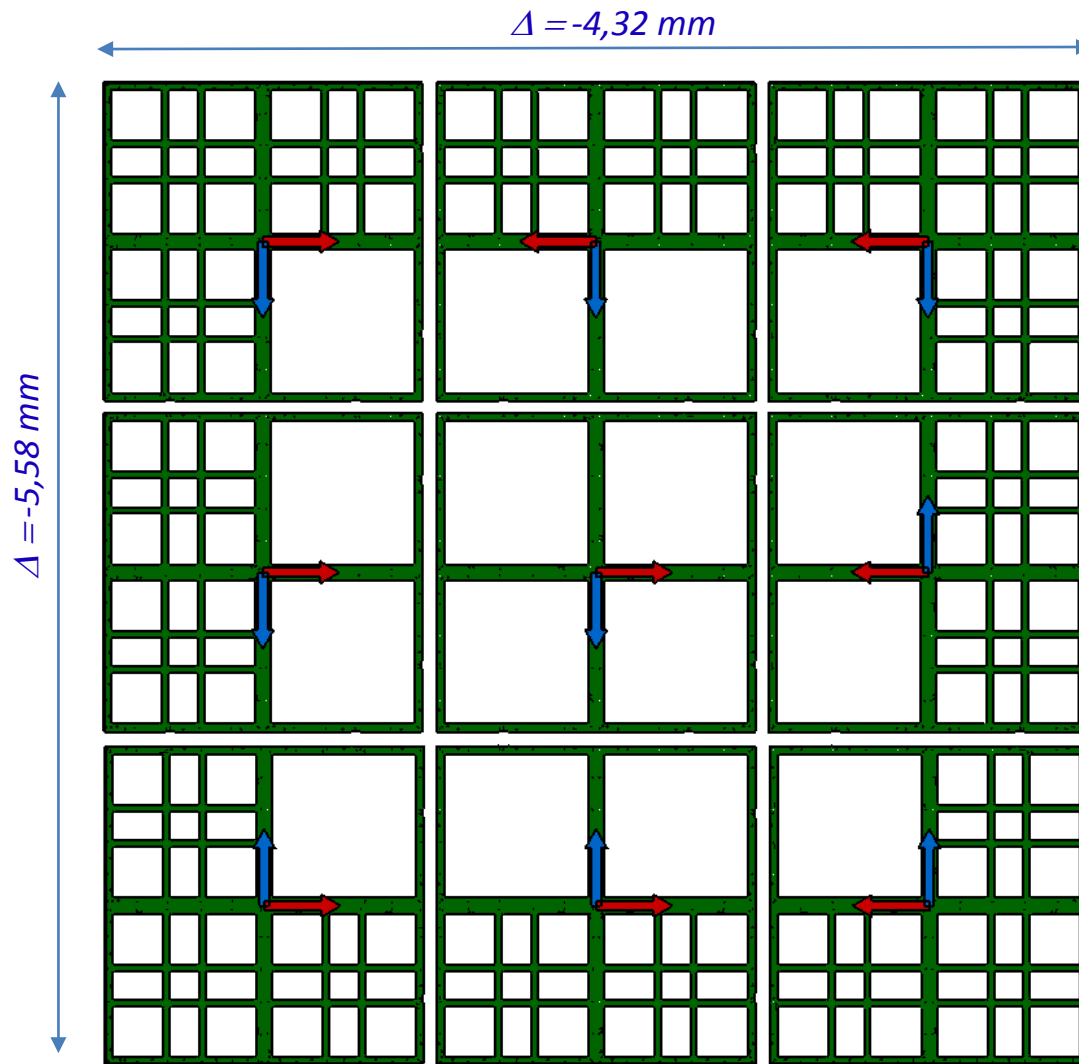


- Fiberglass is used to stick with LAS thermo-mechanical behavior and avoid over-stress due to differential thermal contraction.
- At cold, whole plane will be a slight rectangle.
- Differential thermal contraction occurs between G10 and Invar frames.


- During cooling, Invar is keeping its dimensions while G10 frame and LEMs/Anodes are contracting
- Thermal decoupling allows a lateral sliding of the G10 frame, without changing the altitude
- Decoupling systems are installed at each corner of the invar frame (50 systems by 3x3m module)

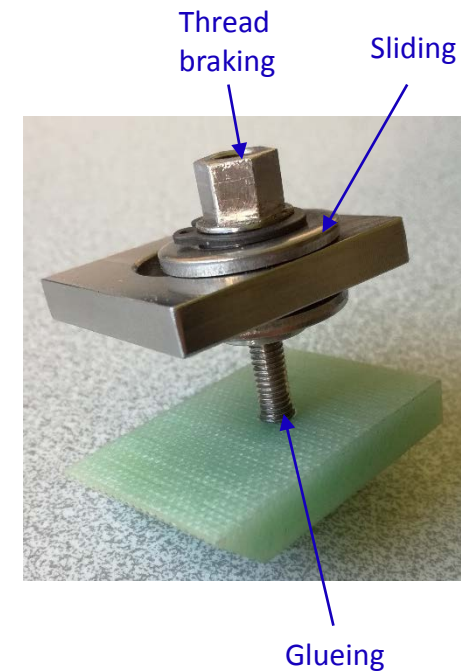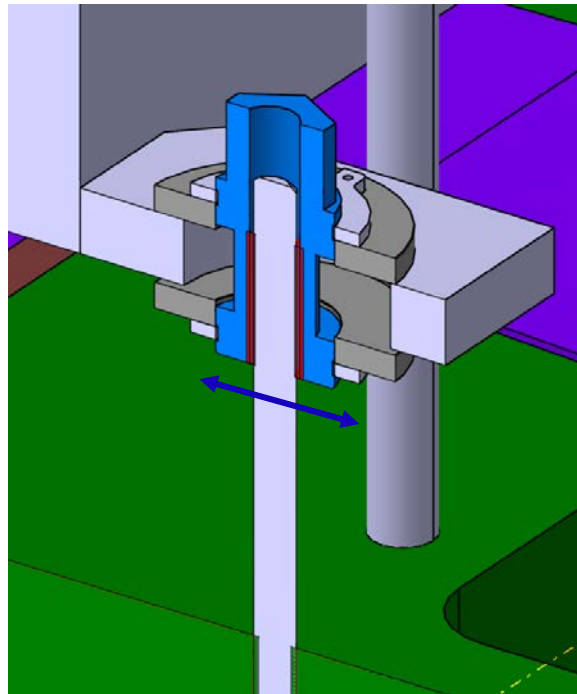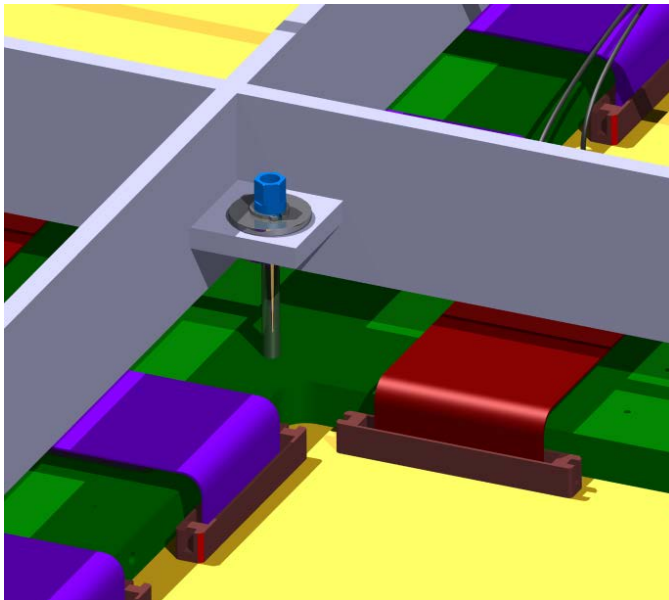



- The contraction of each 3x3m detection plane is fixed at each modules' center
 - *G10 is contracting about seven times more than invar in cold conditions*
- Once in cold condition, modules are moved thanks to SPFT lateral movement and Distance-Meters measurements (see next slides)
- Final Interspaces between LEMs in cold condition :
 - *0,5-0,8mm inside a 3x3m module*
 - *< 10mm between two 3x3m detection area*

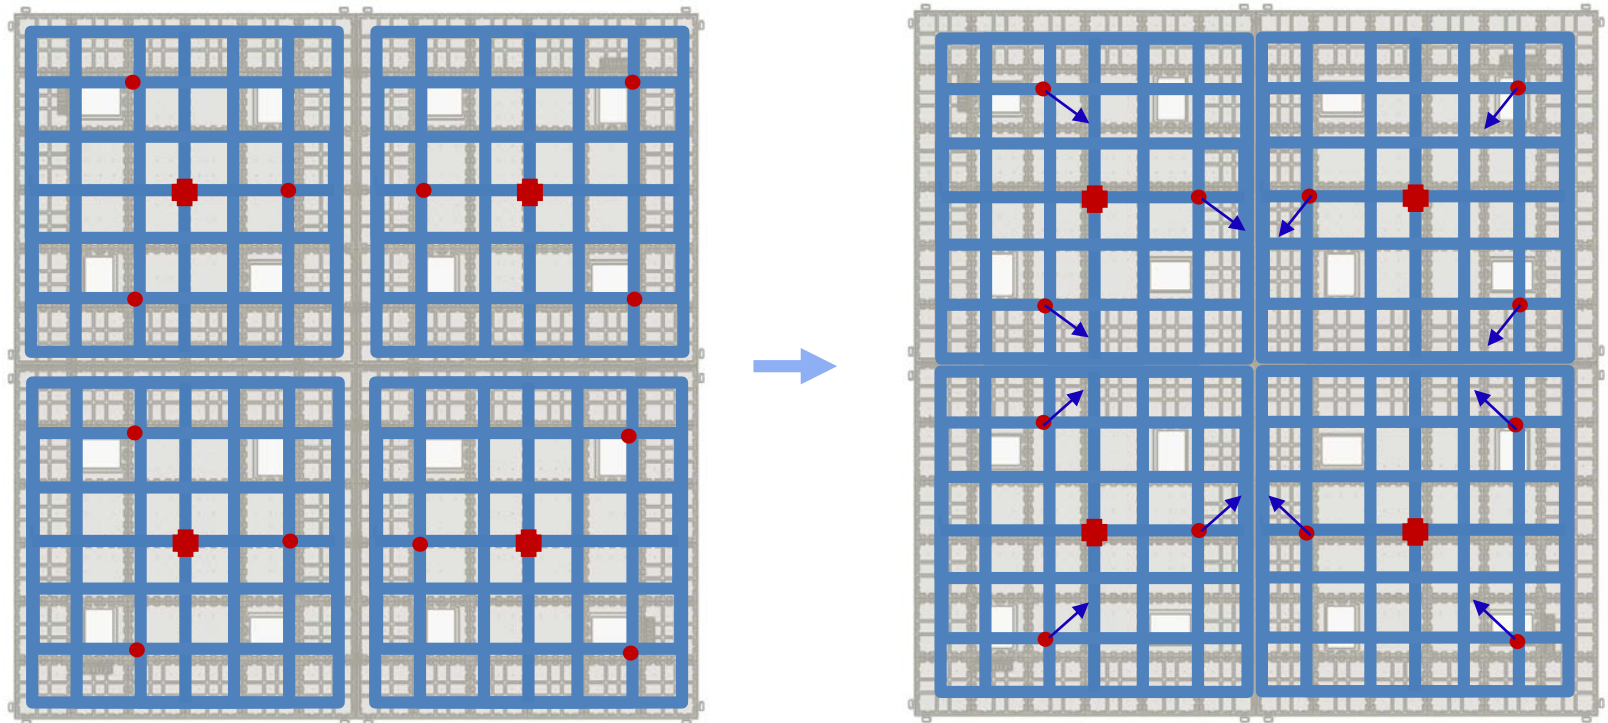

- Extraction grid's wires are soldered on supporting PCB plates, assembled on a supporting beam

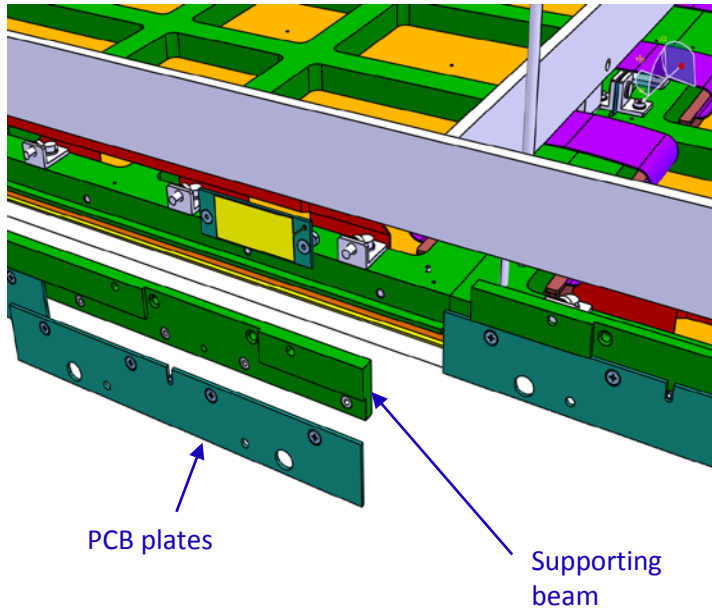


- Grid tensioning is performed by tightening « pushing screws », adding a calibrated wedge, and locking the supporting square

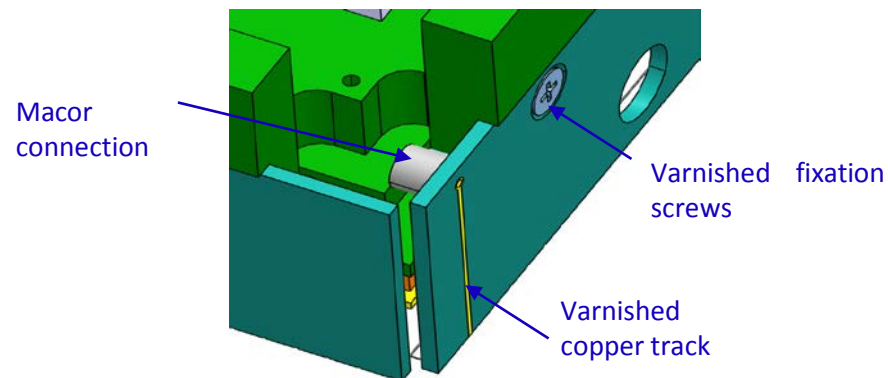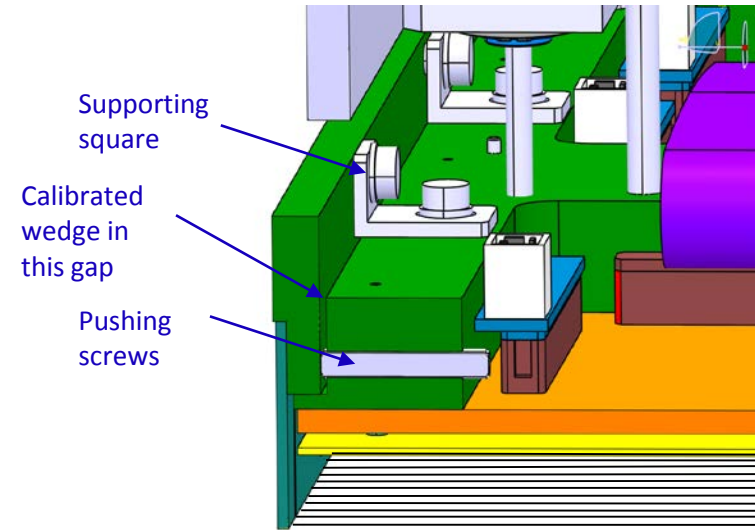



- Capacitive Level Meters (same as 3x1x1)

- 4 devices by external side of the 6x6m
- Fixed on a very stiff G10 support

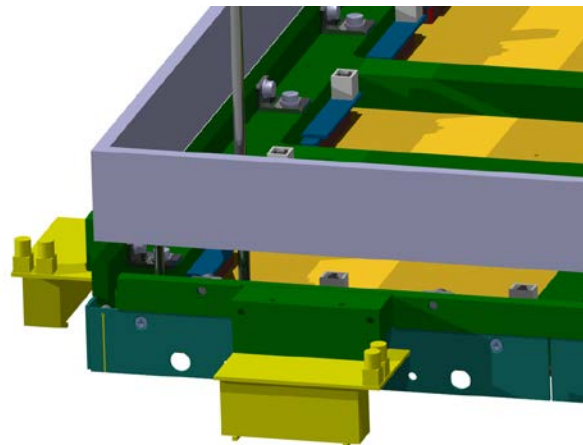


- Distance Meters

- Gives informations on module's relative positions
- Capacitive measurement, no contact
- 4 devices by 3x3m side (internal side)

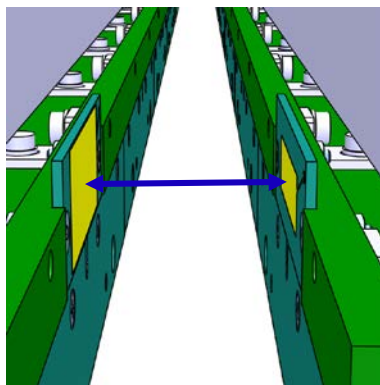
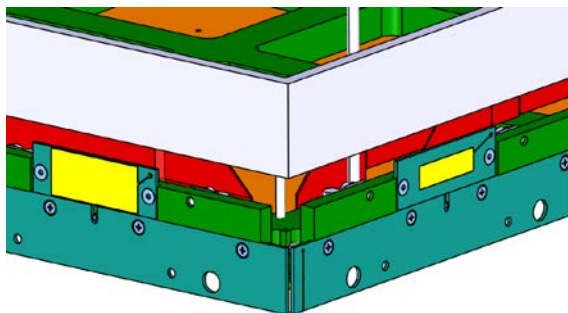


- Thermometers


- Fixed on G10 blocs

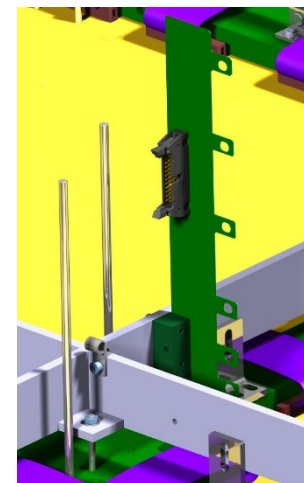

Independent Charge Readout Plane 3x3 m2 module

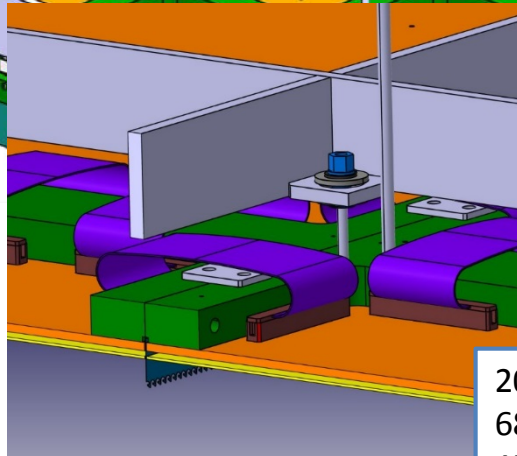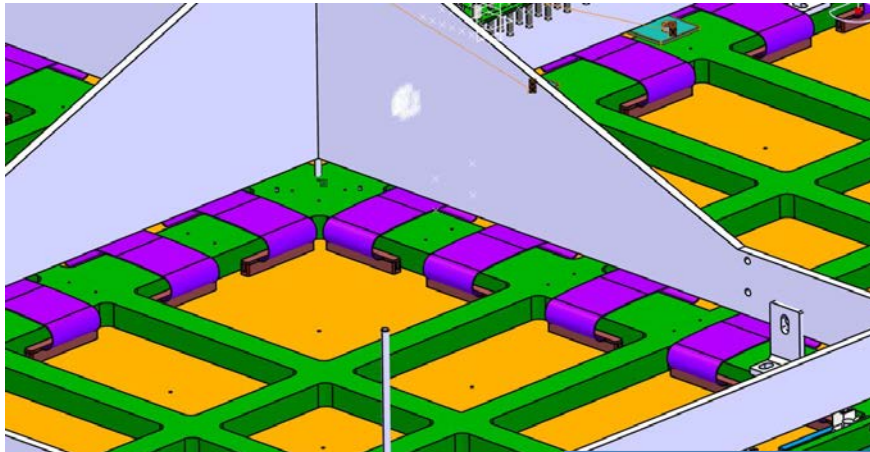

Bridge needed to electrically connect adjacent 50x50 cm² anodes

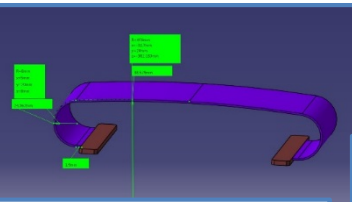




20 cm long flat cable
68c, 0.635 mm pitch, 30
AWG




Sample to be tested for continuity in cold and outgassing

- 300 bridge per 9m² module needed
 - Several options under consideration – see backup
- 600 KEL 8925E-068-179-F (receptacles to be crimped on cable)
- 720 KEL 8913-068E/R-178MS-A-F (smd connectors for anode)

- 2 patch panels per 3x3m module
- Instrumentation from the module is connected first to Patch-Panel, then Patch-Panel to Cryostat
- Designed in collaboration with Confectronics
 - *Signal and HV panels separated*
 - *Special Macor connector for HV*

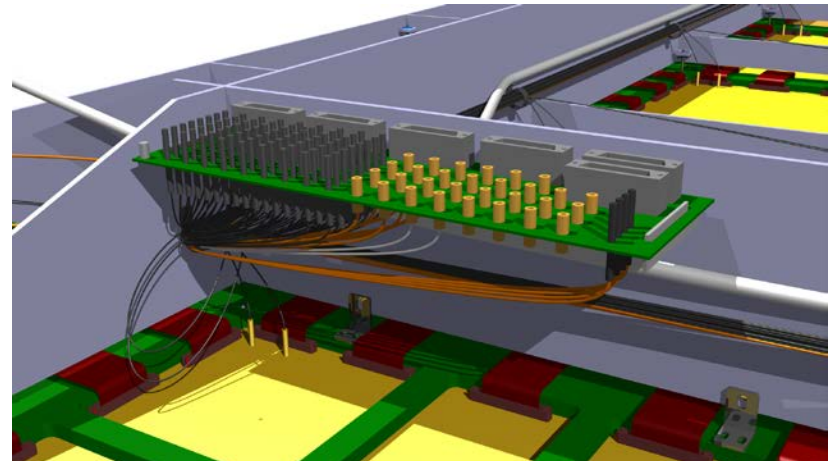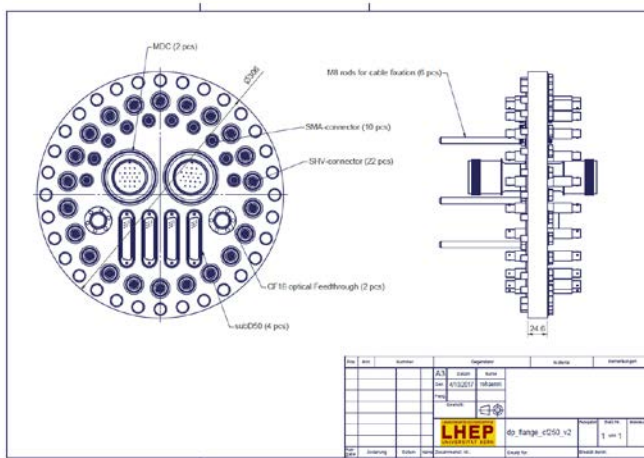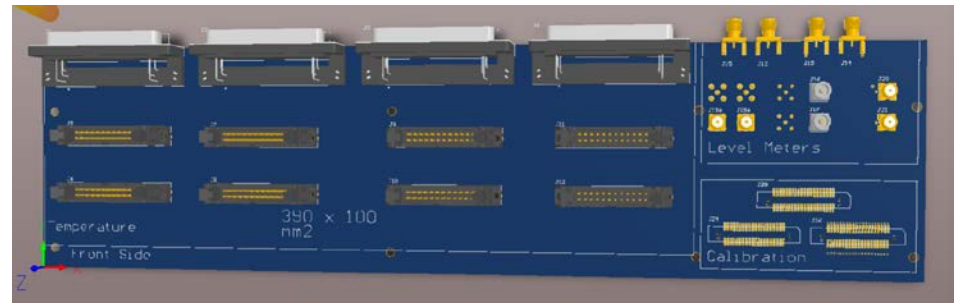

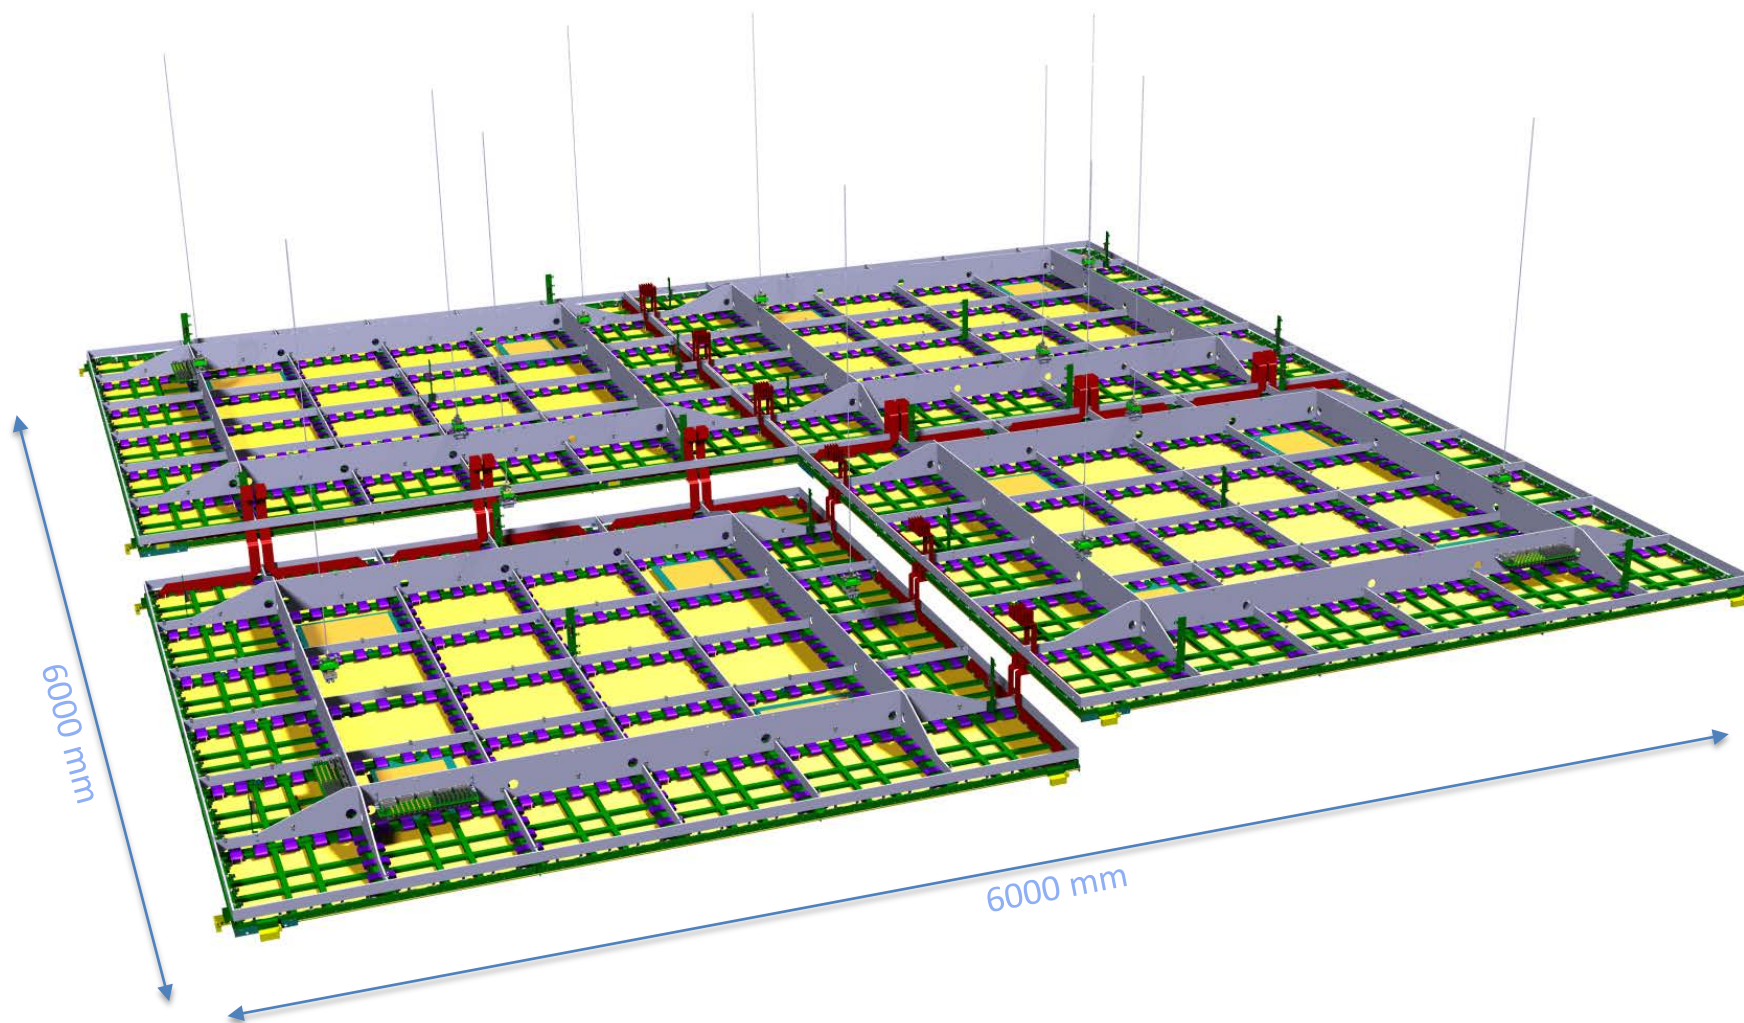



G10 preparation done in 2-3 days by CRP.

Done for the four CRPs.





External dimensions of each G10 frame is measured by CERN team, to adapt the extraction grid length and tension.




Measurement done in half a day by CRP.

Done for the four CRPs.

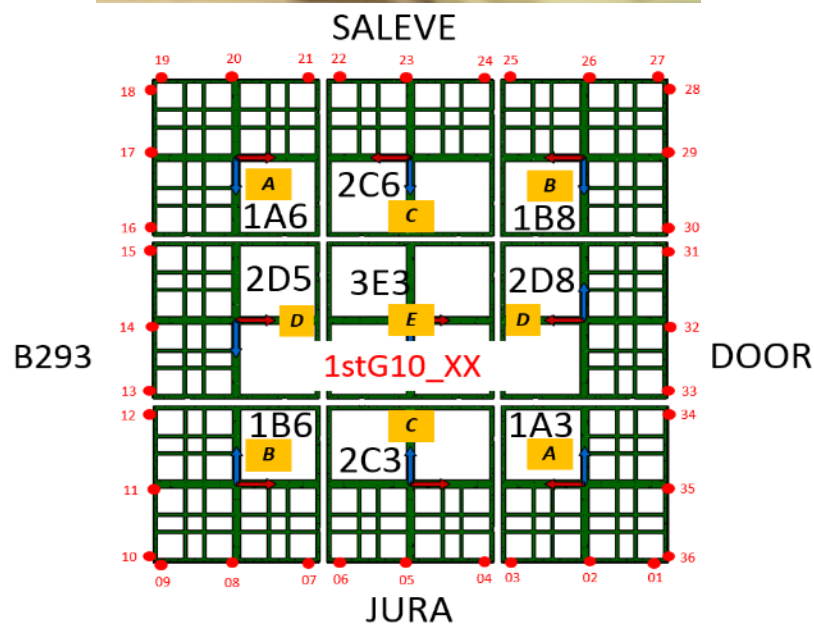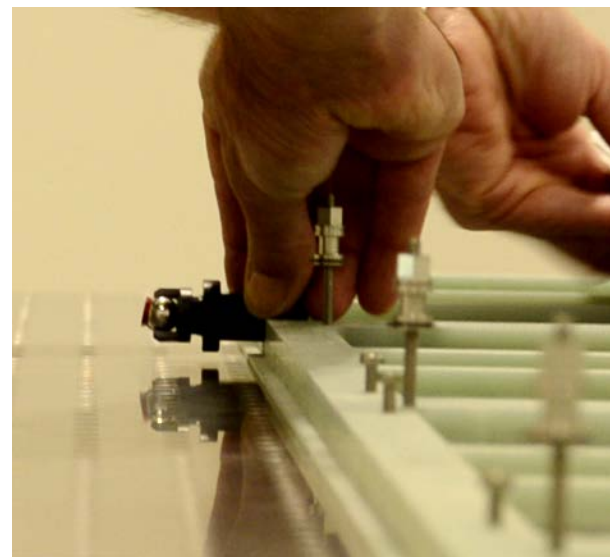

External dimensions results, defining the grid production tooling adjustment.

Jura side	Salève side	CRP1	CRP2	CRP3	CRP4
2NDG10_01	2NDG10_27	0,07	0,74	0,92	1,23
2NDG10_02	2NDG10_26	-0,16	0,49	0,67	1,01
2NDG10_03	2NDG10_25	0,01	1,00	1,04	1,25
2NDG10_04	2NDG10_24	-0,50	0,41	-0,39	1,69
2NDG10_05	2NDG10_23	-0,81	0,18	-0,57	1,51
2NDG10_06	2NDG10_22	-0,46	0,36	-0,46	1,50
2NDG10_07	2NDG10_21	0,31	1,78	1,14	0,84
2NDG10_08	2NDG10_20	0,08	1,55	0,62	0,55
2NDG10_09	2NDG10_19	0,26	1,86	0,75	0,73
B293 side	Door side				
2NDG10_10	2NDG10_36	0,20	0,71	0,08	1,13
2NDG10_11	2NDG10_35	0,14	0,42	-0,10	0,77
2NDG10_12	2NDG10_34	0,32	0,60	0,06	0,95
2NDG10_13	2NDG10_33	0,65	0,80	0,47	0,90
2NDG10_14	2NDG10_32	0,50	0,86	0,39	0,90
2NDG10_15	2NDG10_31	0,51	1,10	0,48	0,83
2NDG10_16	2NDG10_30	-0,39	0,96	0,24	1,63
2NDG10_17	2NDG10_29	-0,45	0,79	0,13	1,43
2NDG10_18	2NDG10_28	-0,28	1,04	0,50	1,78
	Min	-0,81	0,18	-0,57	0,55
	Max	0,65	1,86	1,14	1,78
	Std_Dev	0,40	0,46	0,49	0,36

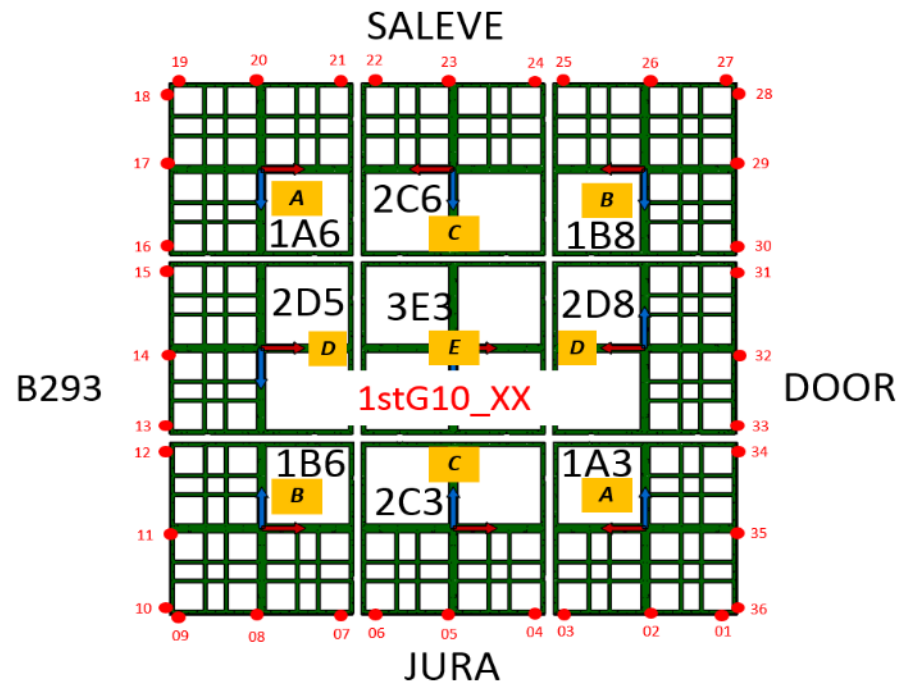

- High scattering on those dimensions
- Reparations were required
- Suitable for ProtoDune needs

Invar frame suspensions on the supporting structure
Then, connection to the G10 frame.

Assembly done in a day.

Completed for the four CRPs.




Anodes and LEMs installation is performed in 1 week by CEA's team.

This is already done for 2 CRPs.

Two other CRPs are equiped with fake anodes only.

Done for CRP3, in progress for CRP4.

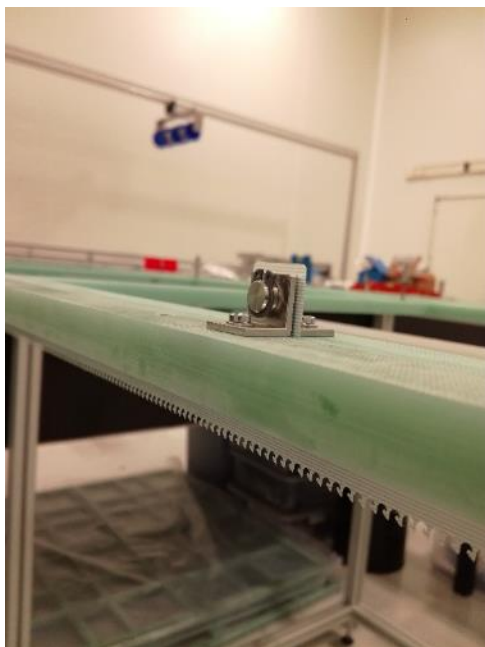


Once detection plane is installed, combs for the extraction grid are placed (0,5 day/CRP).

In parallel, 30 extraction grid subsets of 64 wires are produced and stored.

This operation takes around 10 days.




Each subset is then installed on the CRP and inserted in the combs.

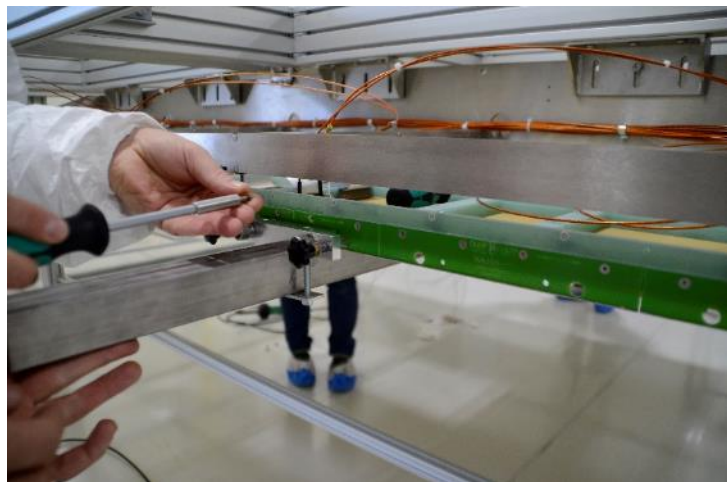


The planarity of the CRP is then measured and adjusted on 50 points and 2-3 iterations.

This is performed in one day by CRP.

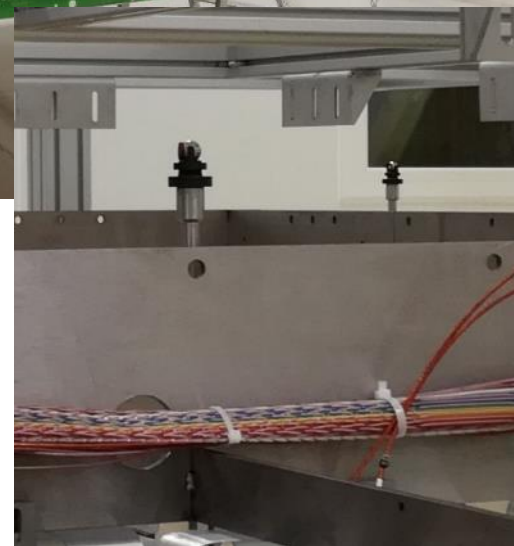

Planarity defect and defect repartition for CRP3 :

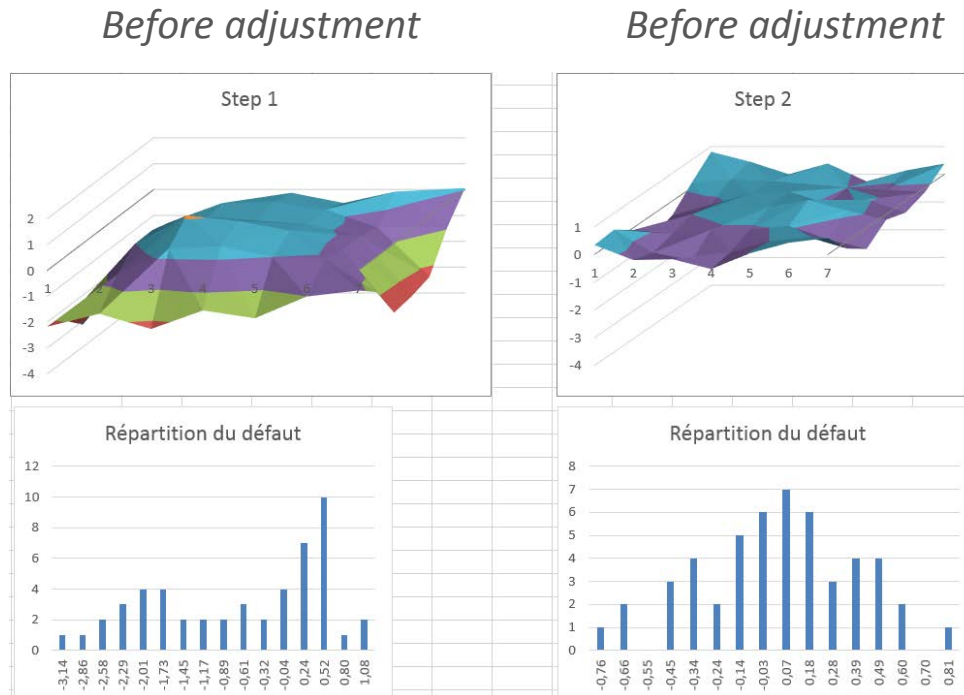

Results for measurements in CR185 (four CRPs) :

Values in mm	Initial max defect	Initial std dev	Final max defect	Final std dev
CRP1	3,71	1,03	1,53	0,309
CRP2	5,95	1,55	1,54	0,363
CRP3	4,22	1,192	1,57	0,357
CRP4	-	-	-	-

- G10 frames
 - External dimensions
 - Faulty braking thread inserts for screws were
 - LEM/Anodes fixation holes
- Need to be simplified for future detectors

Problems linked to G10 frames have been solved manually for NP02 CRP


- Extraction grid
 - ✓ Weaving pattern
 - ✓ Wire length & tension
 - Material thermal contraction effect

Problem encountered only for CRP1 during first coldbox test, then solved.

Currently, CRP3 (fake anodes) has been inserted and installed successfully.

After the transport from B.182 to EHN1, the CRP3 has been inserted in the Clean Room Buffer (CRB).

Then it has been suspended to the insertion rail, and inserted in the Cryostat.

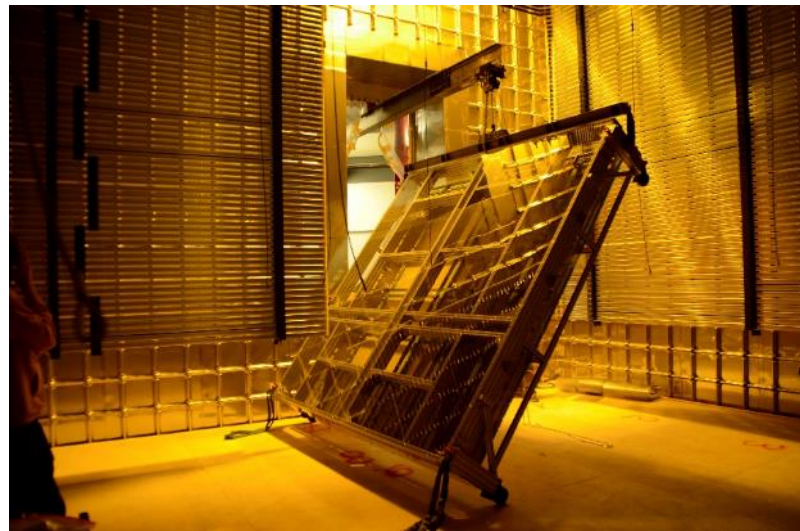

Once in the cryostat, the CRP inside of the box is hung to the suspension cables from SPFTs.

Then the box is disassembled and slided.



The CRP is lifted and inspected.




This operation is done in a day.




Then the connection of the CRP to the chimneys is done from the roof.

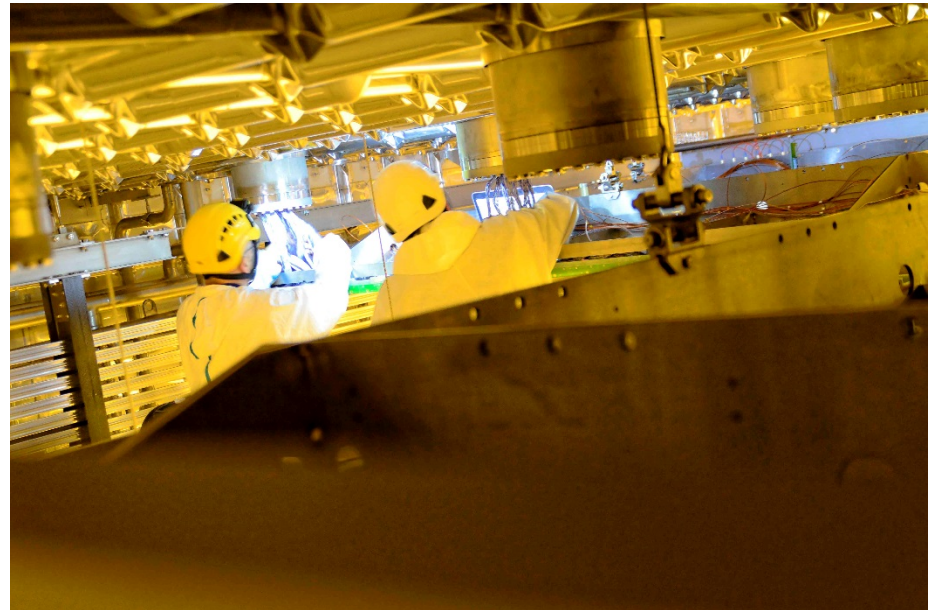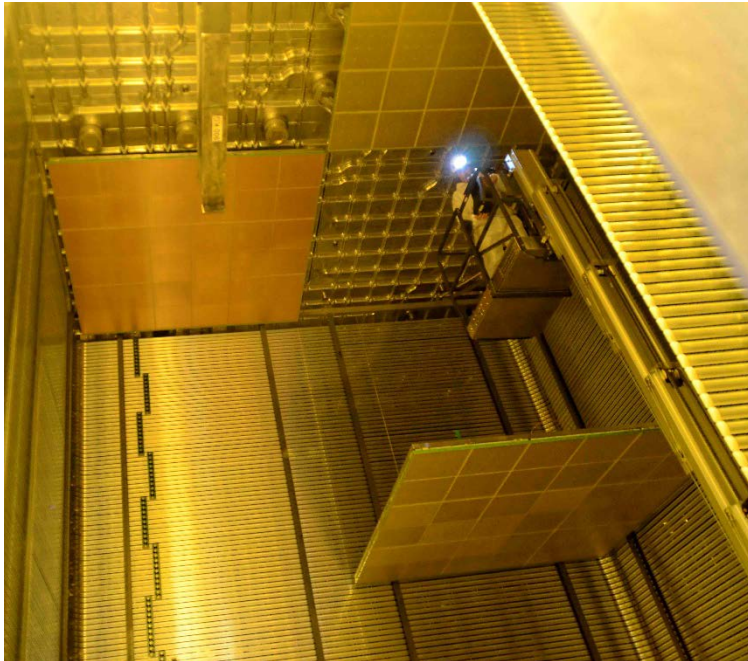

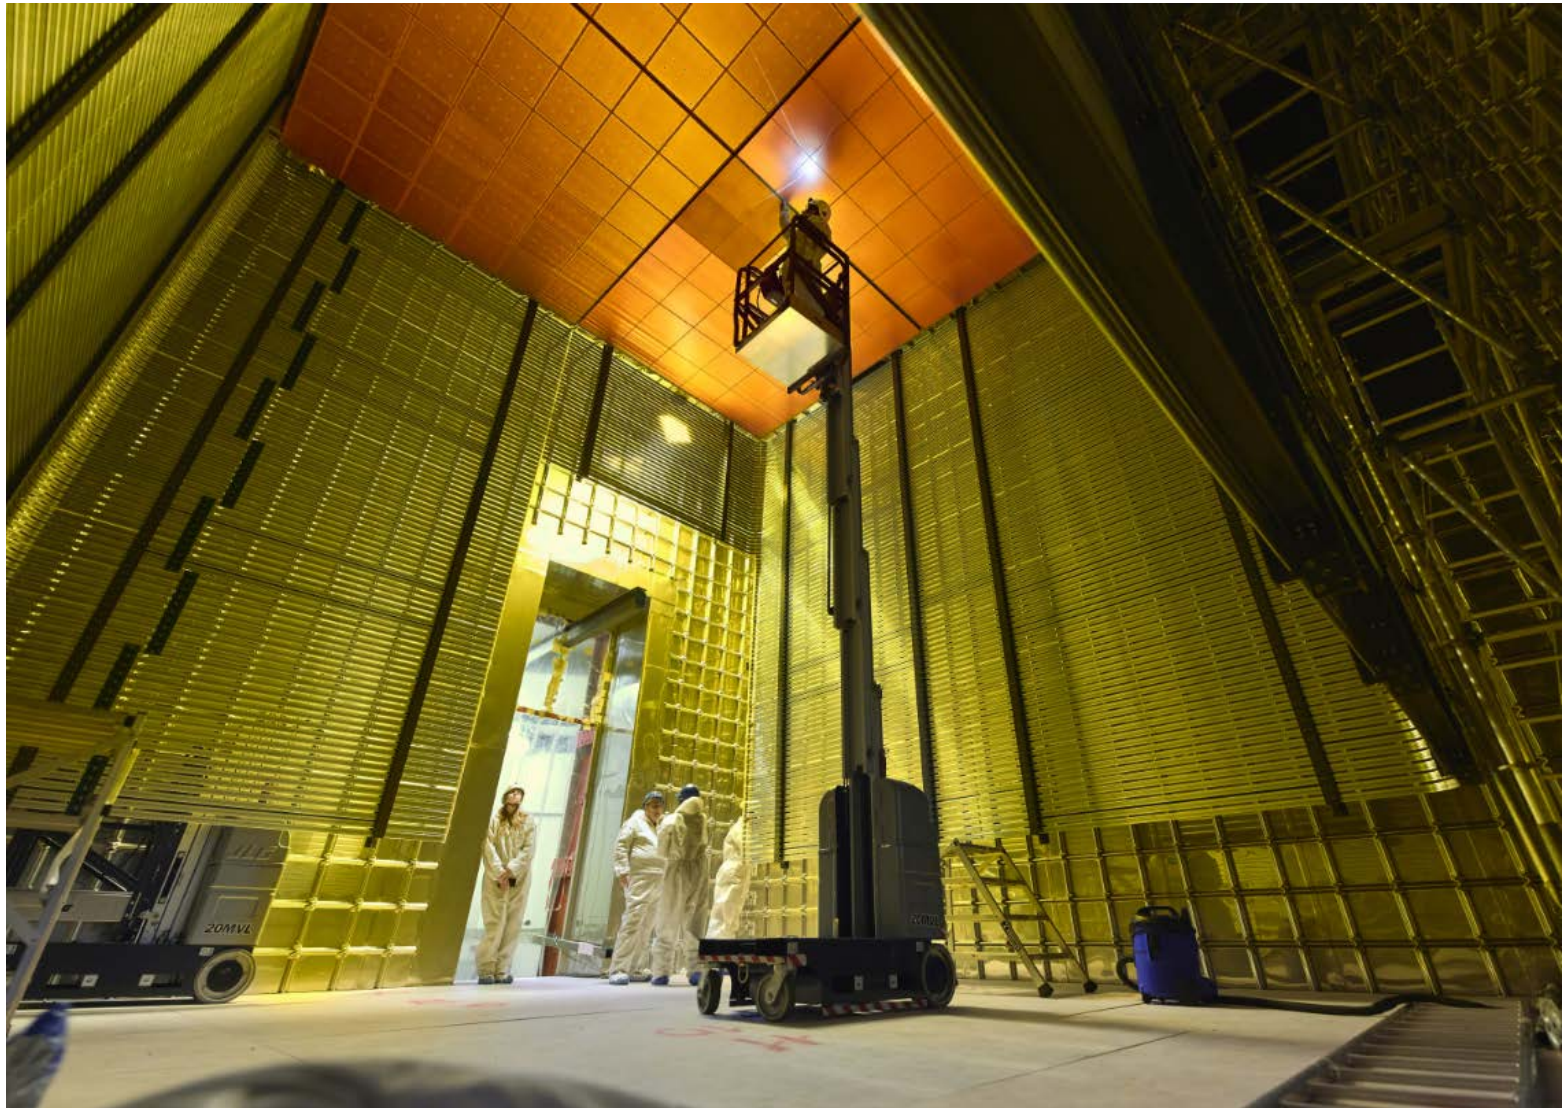

Thanks for your attention

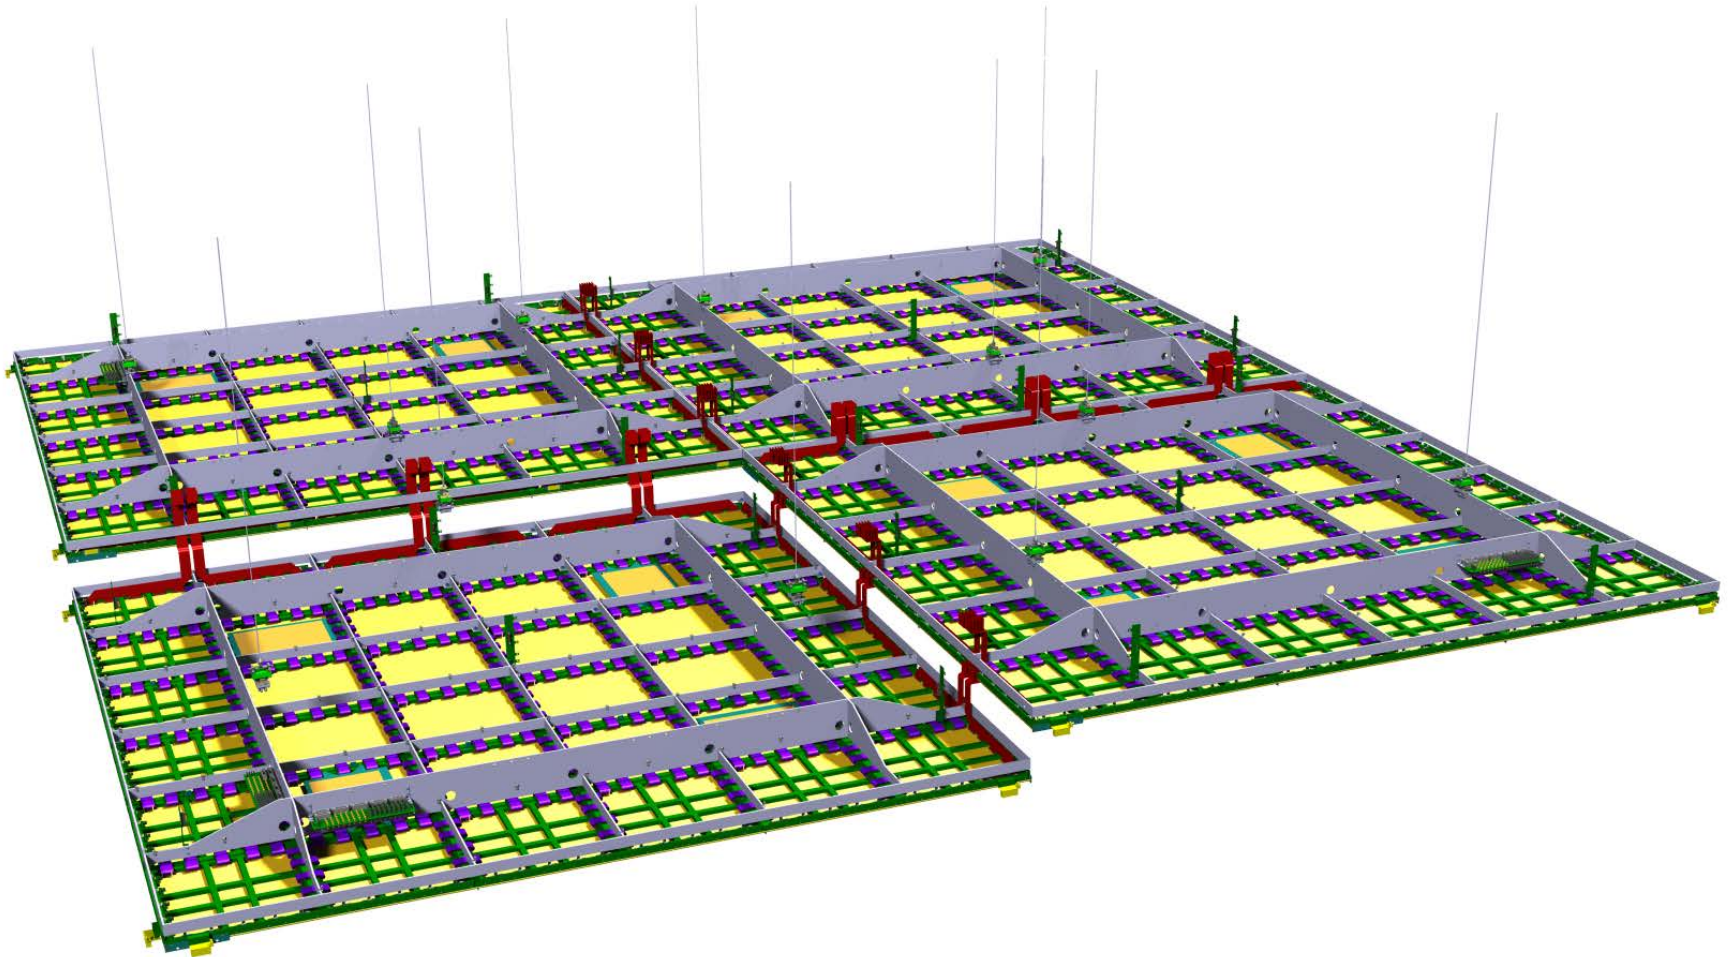


Spare slides

Why invar?

Thermal shrinkage Real tests on Stainless Steel plates

Stainless Steel plates above the 3x1 Argon bath


(Measurements by Dirk in photogrammetry)

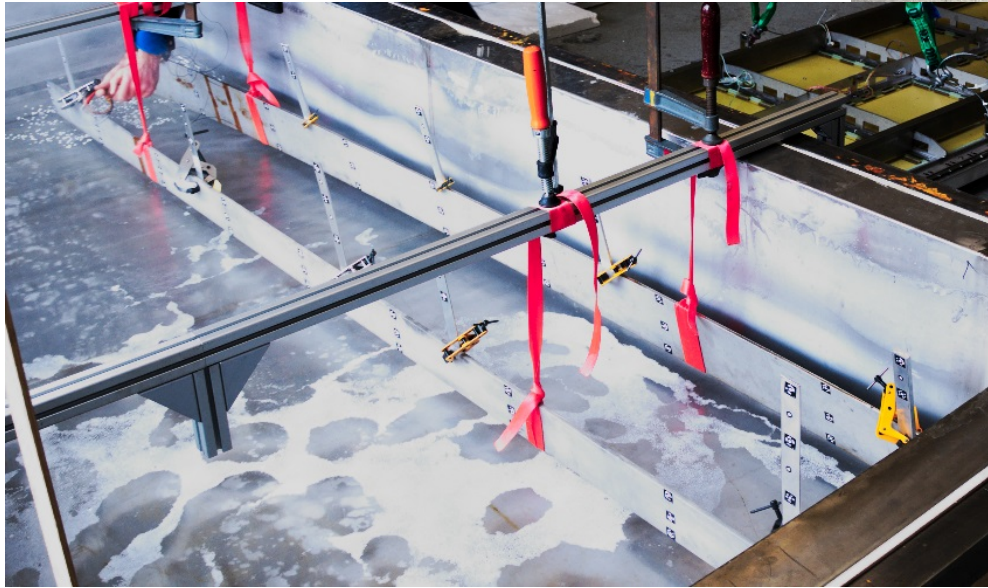

Thermal shrinkage Temperatures in gaseous Argon

Temperatures in gaseous Argon around the plates (@ 14h25) :

- **100 mm plate** : Bottom = -163°C , Top = -98°C , ΔT : 65° (GAr)
- **150 mm plate** : Bottom = -163°C , Top = -84°C , ΔT : 79° (GAr)

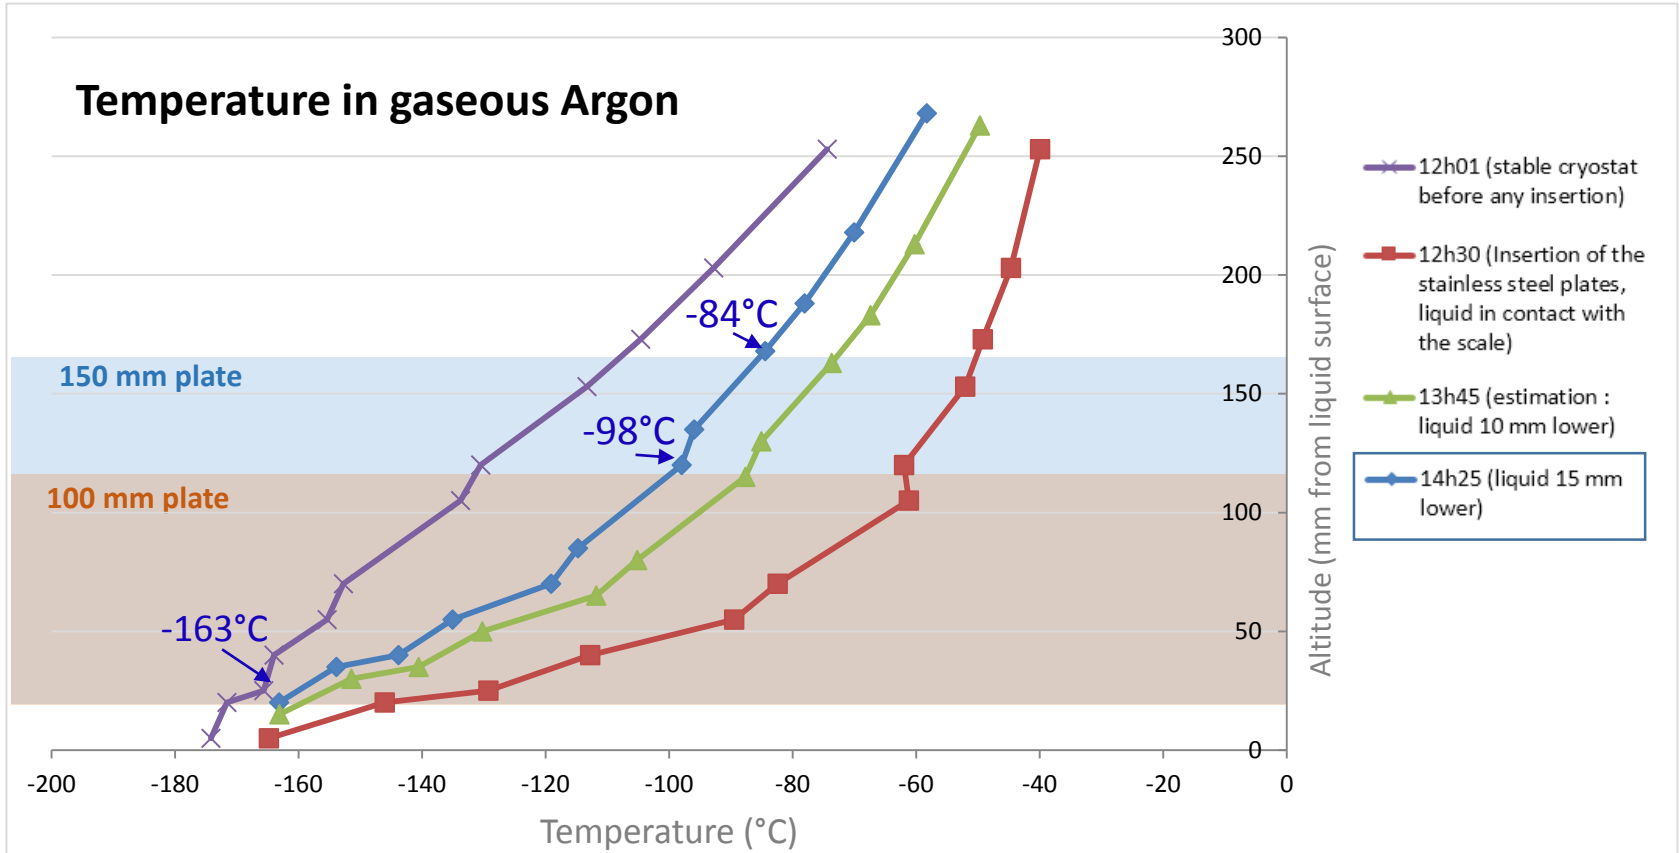


Thermal shrinkage Thermal gradient in gaseous Argon

Thermal gradient in gaseous Argon around the plates (@14h25):

- **100 mm plate** : 4 - 10 °/cm (in GAr)
- **150 mm plate** : 3 - 10 °/cm (in GAr)

Thermal gradient in gaseous Argon

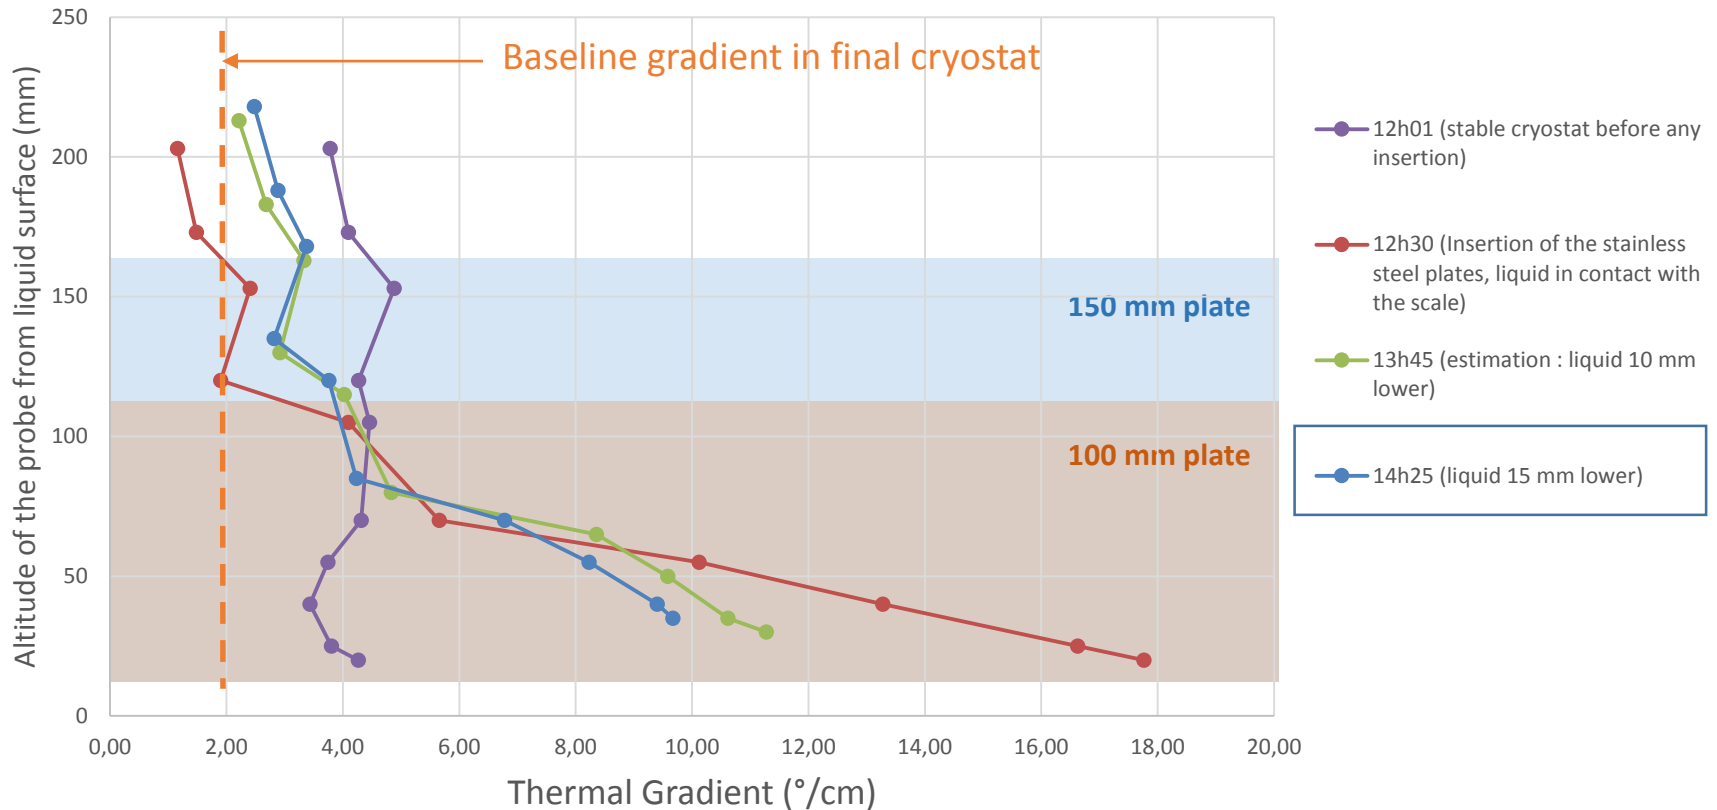

Thermal gradient in the plates


Temperatures in the plates (@14h25) :

(With three PT100 probes)

- **Probe 1** : $-98,75^{\circ}\text{C}$
- **Probe 2** : $-120,6^{\circ}\text{C}$
- **Probe 3** : $-118,10^{\circ}\text{C}$



Temperatures GAr / plate @ 14h25

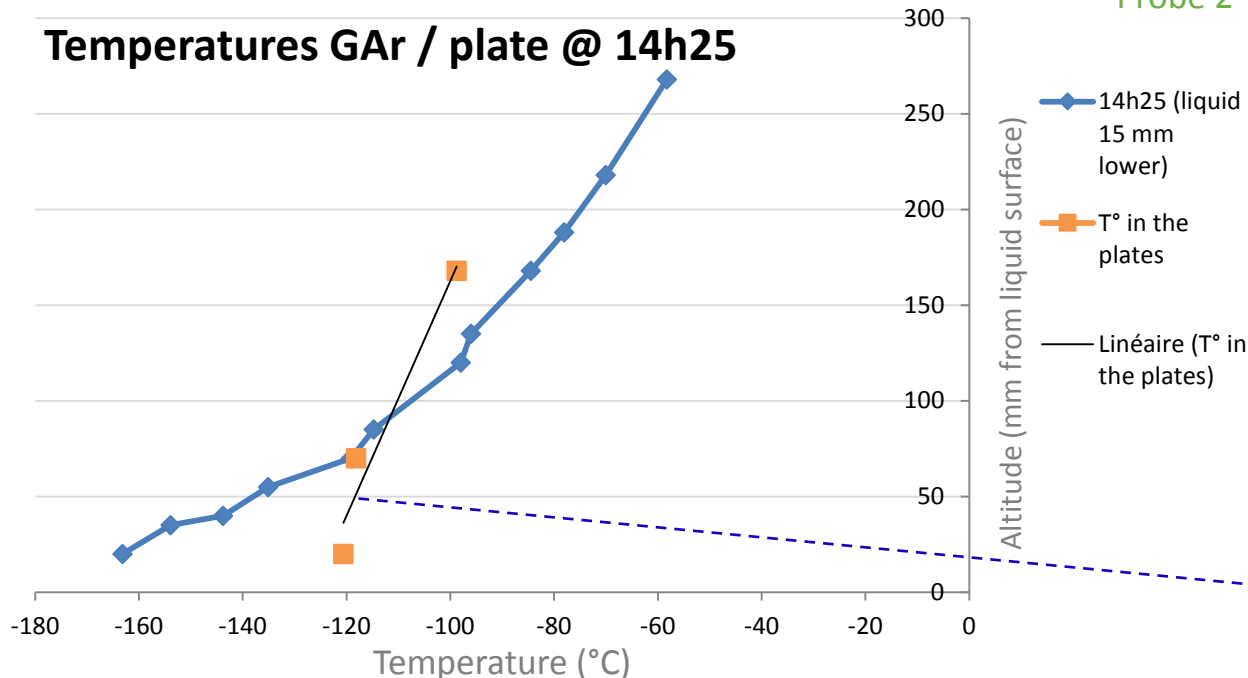


Remarks :


- Temperatures measured **on the surface of the plate**
- No special care taken to insure probe quality measurements (glueing?)

• *Average gradient in the plate : $\sim 1,5^{\circ}/\text{cm}$*

Thermal shrinking : Photogrammetry results – Model constraints

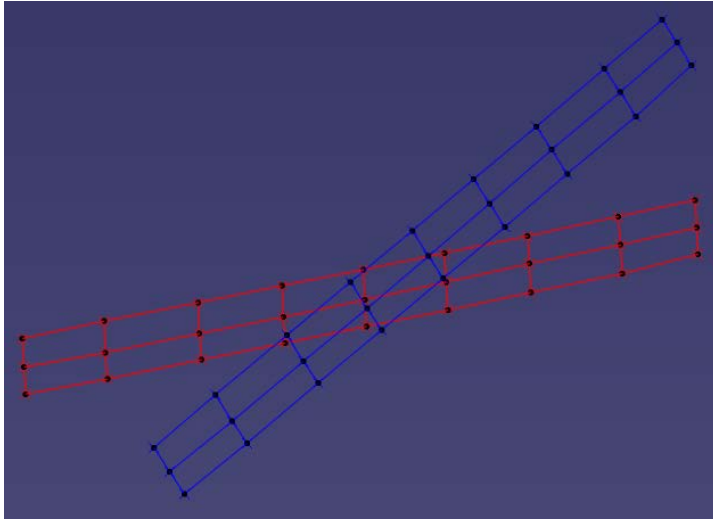


- Photogrammetry provides two clouds of points
 - How to superpose clouds for measurements ?
- Red (warm measurement) is the reference.

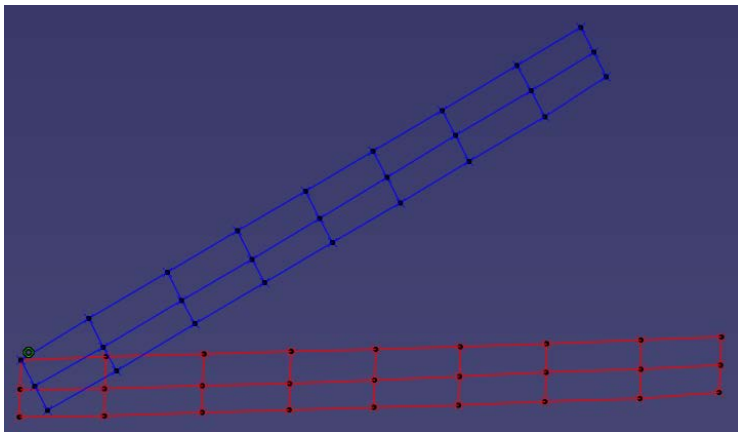


- First, a corner is fixed.


Thermal shrinking : Photogrammetry results – Model constraints

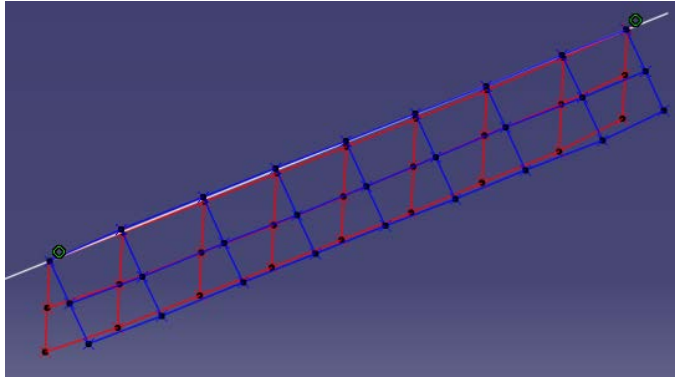

- Then, a line between upper corners

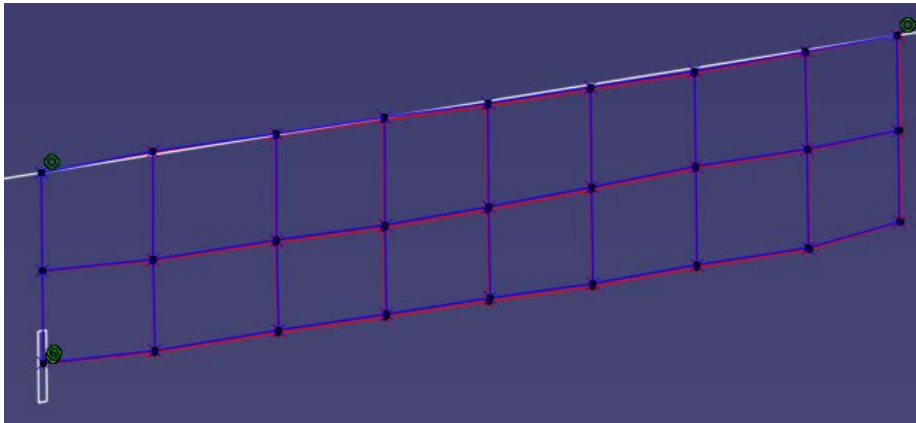


- Finally, the rotation is locked by a third point on a plane
 - *(plane defined by previous line + bottom corner point)*

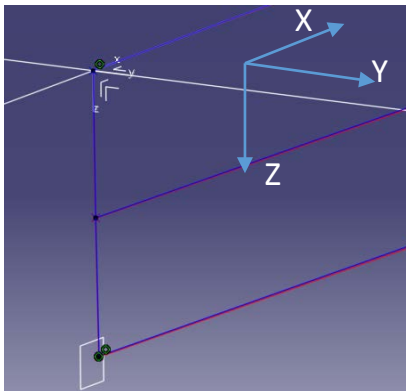

- Results are given in this coordinate system

Thermal shrinking : Photogrammetry results – Large plate 150 mm

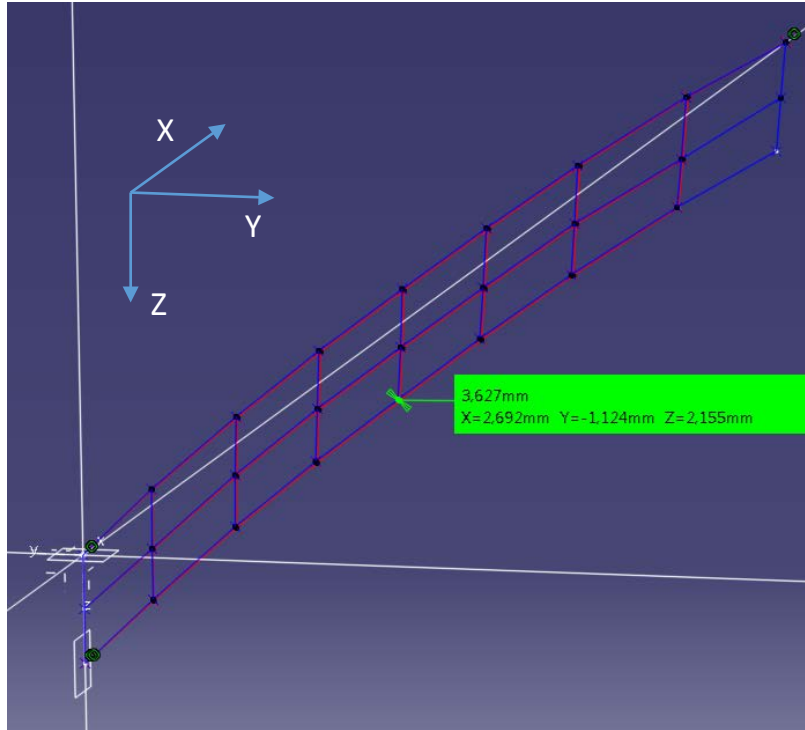

- First : The plate is bended
- Displacements from warm to cold, (at the middle bottom point) :

- $\Delta X = 2,69 \text{ mm}$
- $\Delta Y = - 1,124 \text{ mm}$
- $\Delta Z = 2,155 \text{ mm}$


More than 4x the spec

Photogrammetry precision :
+/-0,1 @ one sigma along X
+/-0,05 @ one sigma along YZ

- ΔX comes from the longitudinal contraction of Stainless Steel => **OK with NIST**
- ΔY comes from a bending amplification => **Unknown gas flow? radiation?**
- ΔZ comes from thermal gradient in the structure => **Ok but less than expected**



Thermal shrinking : Photogrammetry results – Small plate 100 mm

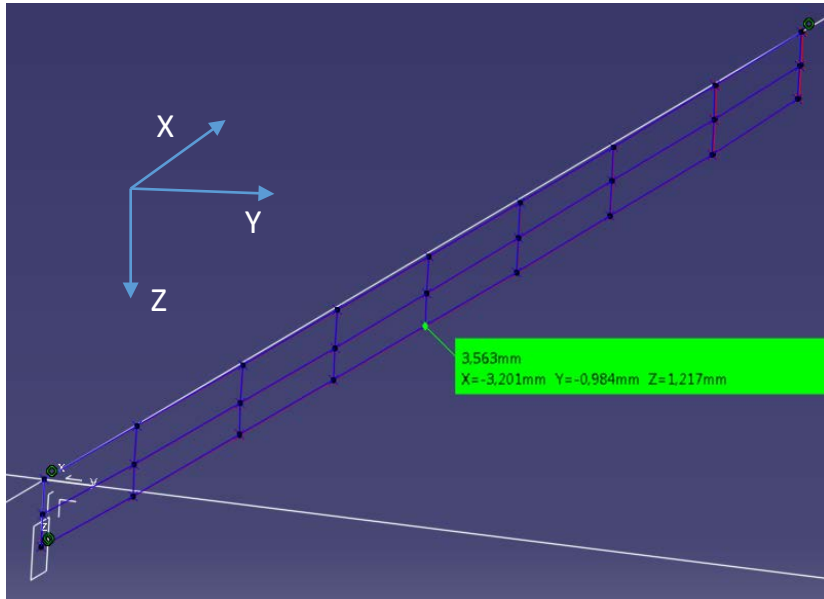

- The plate is slightly bended
- Displacements from warm to cold, (at the middle bottom point) :

- $\Delta X = 3,201 \text{ mm}$
- $\Delta Y = - 0,98 \text{ mm}$
- $\Delta Z = 1,217 \text{ mm}$

More than 2x the spec

Photogrammetry precision :
+/-0,1 @ one sigma along X
+/-0,05 @ one sigma along YZ

- ΔX comes from the longitudinal contraction of Stainless Steel => **OK with NIST**
- ΔY comes from a bending amplification => **Unknown gas flow? radiation?**
- ΔZ comes from thermal gradient in the structure => **Ok but less than expected**




Invar oxydation studies

INVAR part

INVAR part from cryo decoupling test


- *Two thermal cycles in liquid Argon/Nitrogen*
- *No storage precaution*
- *Stored for 6 months*

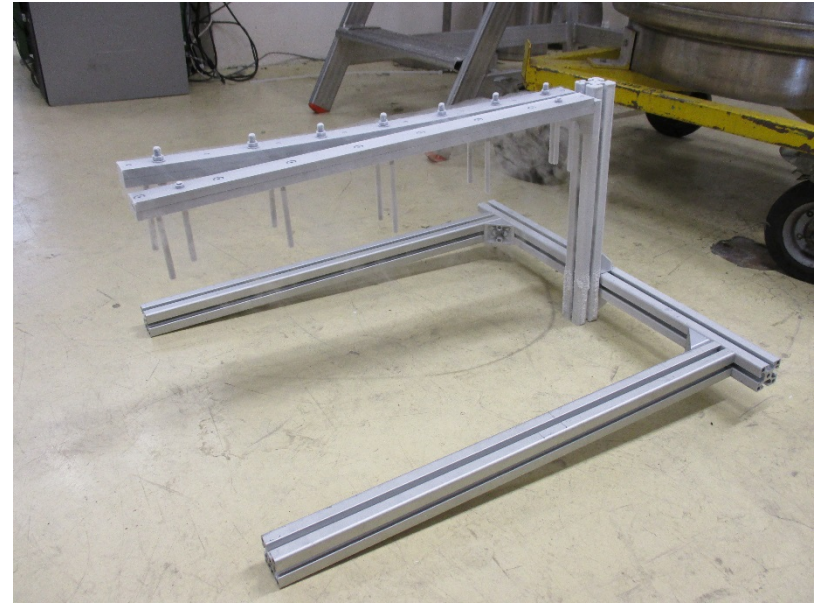


Design overview

Slight rectification to reach
10mm thickness :
Slightly oxydated

Machined face :
No oxydation

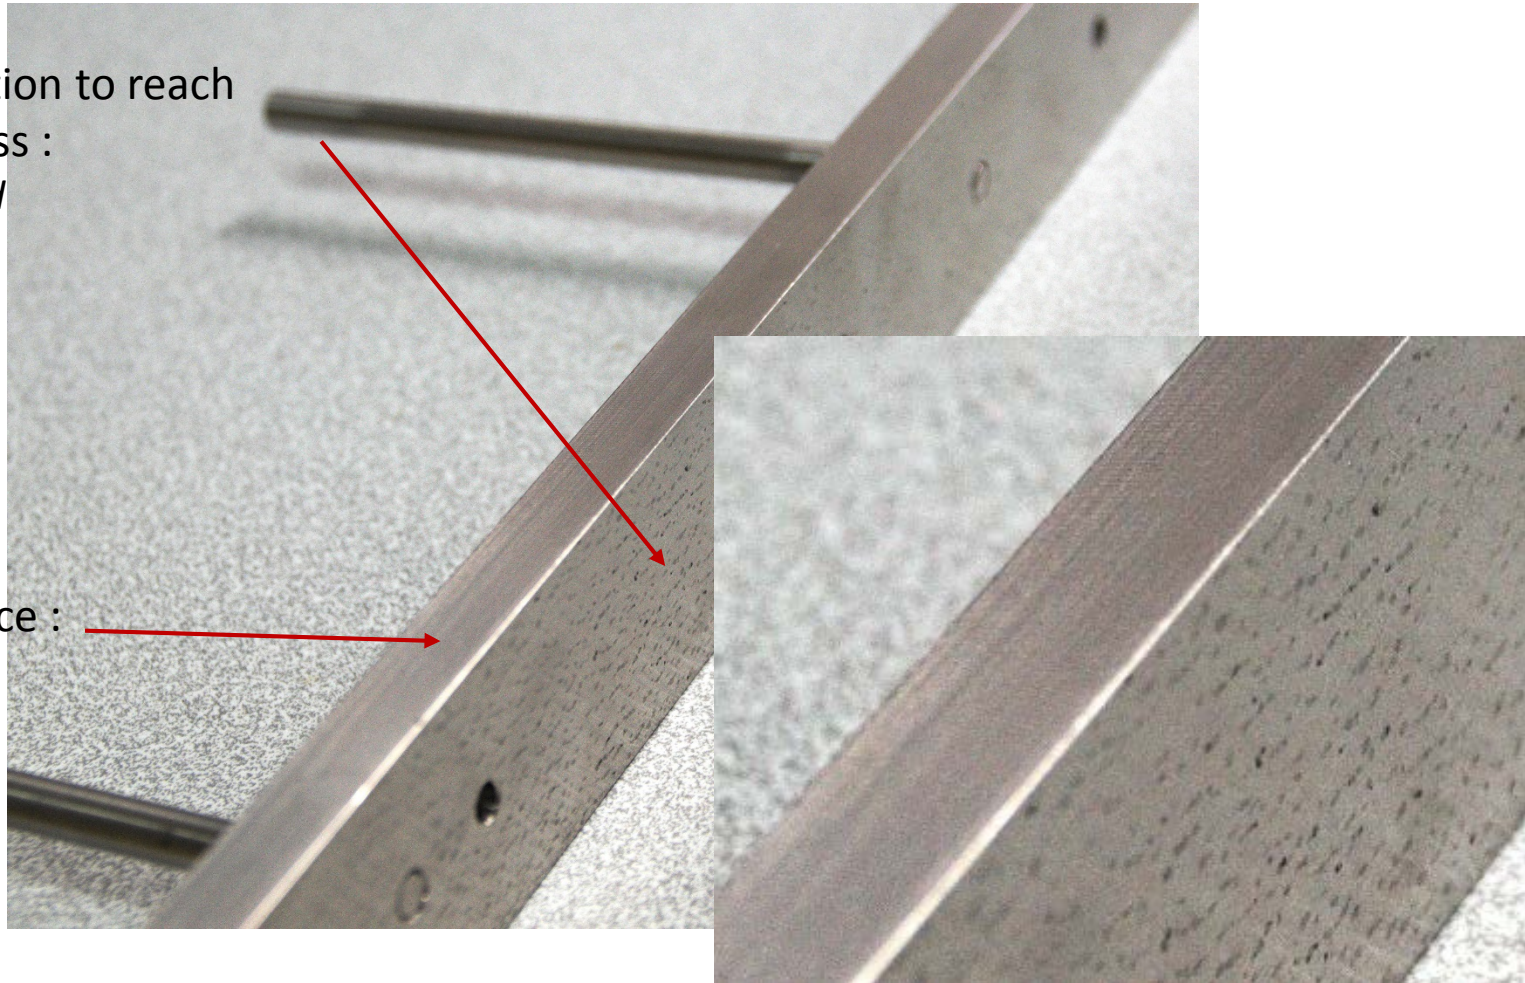



Rectified face (from a block, not from a plate)

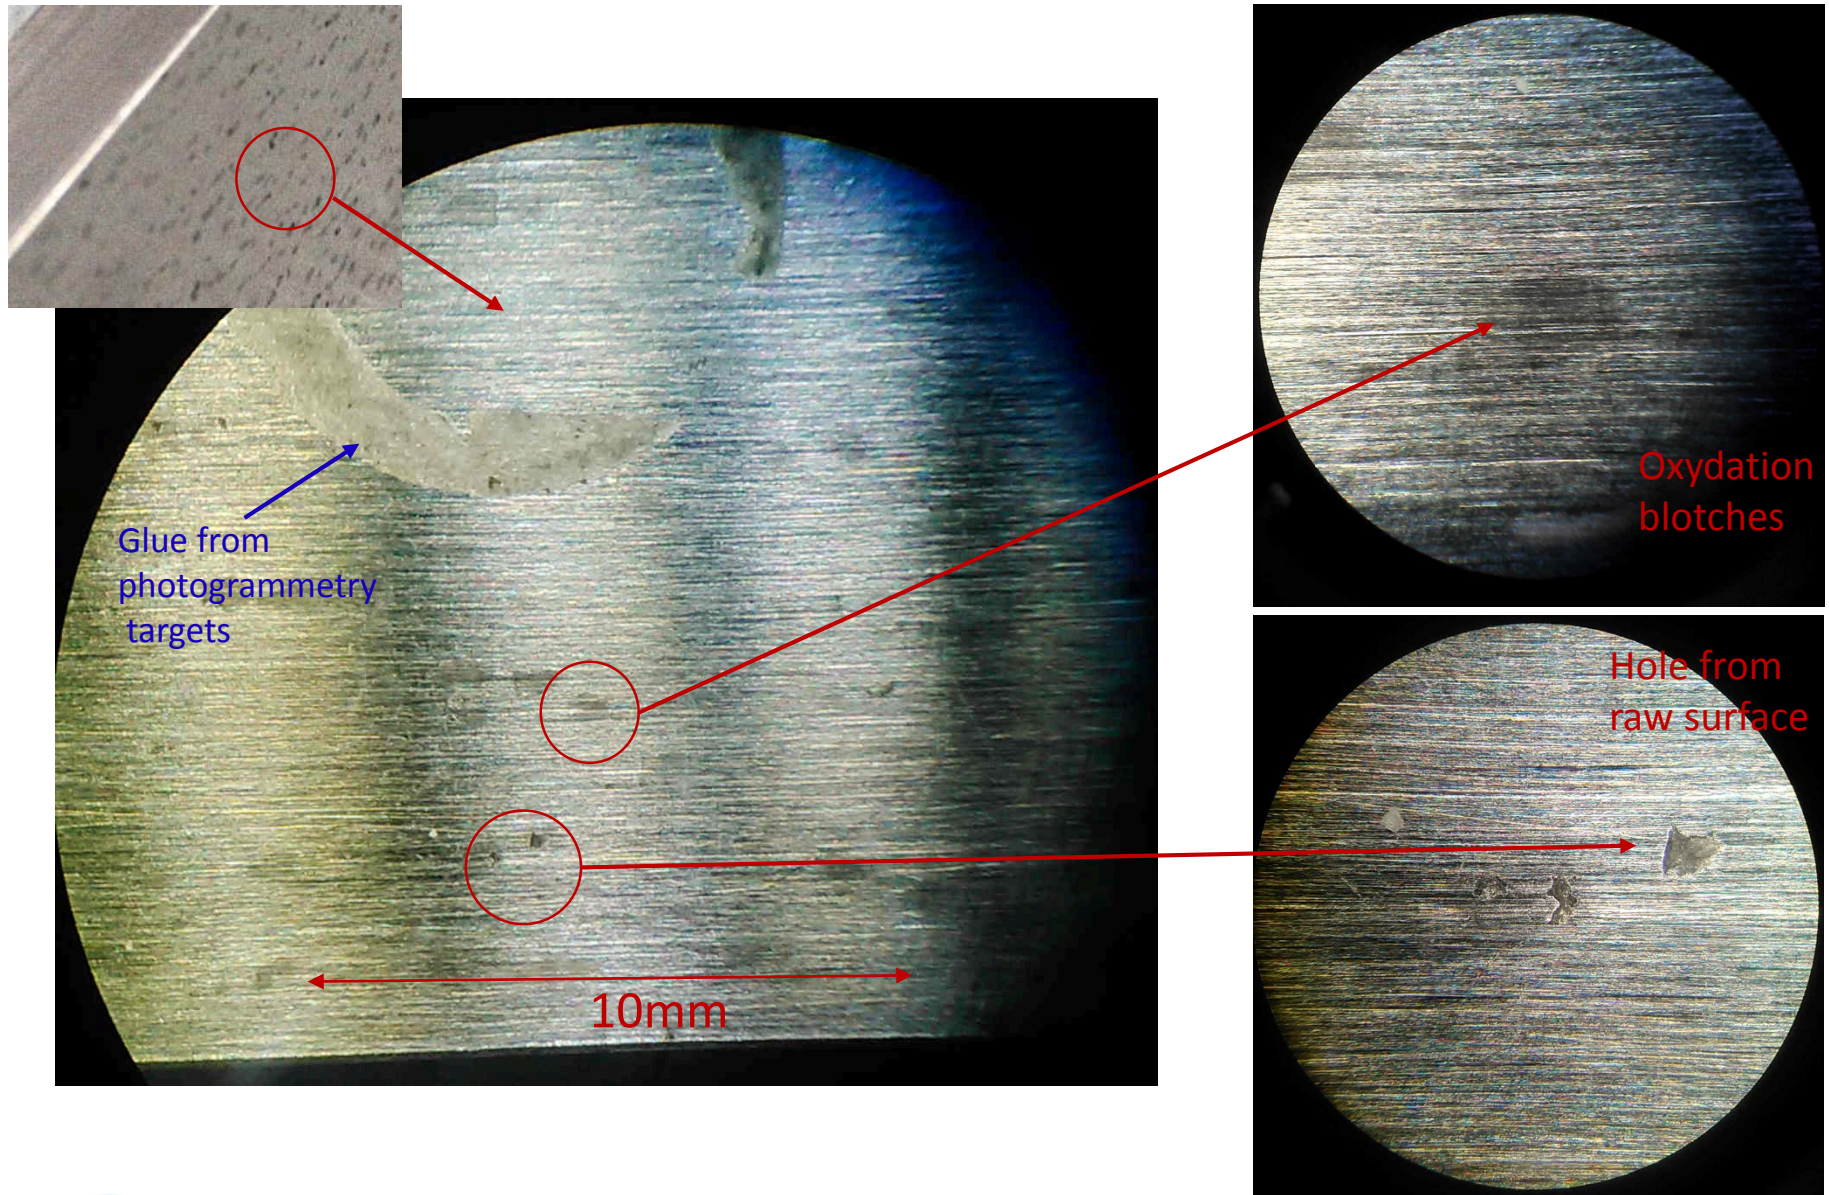

Machined face (from a block, not from a plate)

No trace of oxydation noticed on the machined face

➤ *Even no oxydation in the scratches*

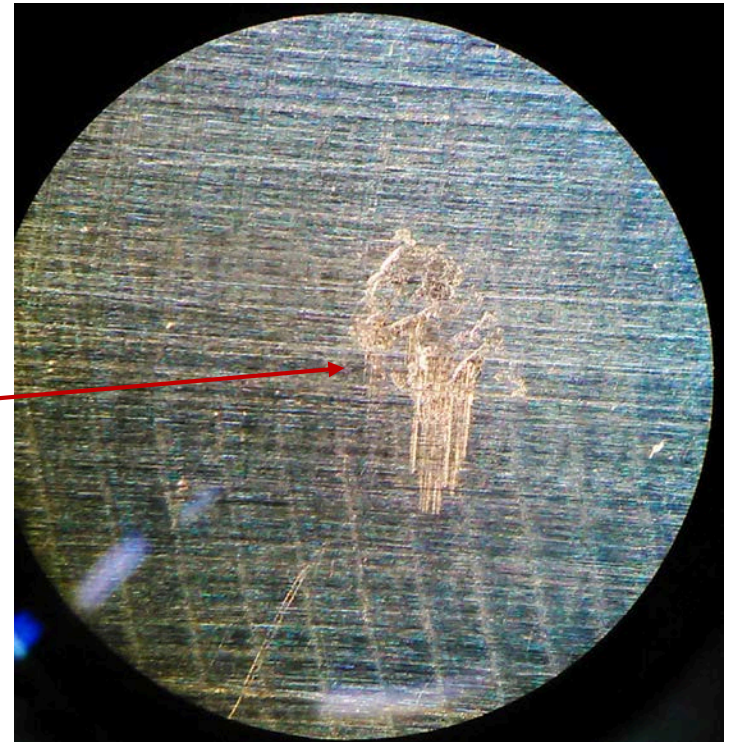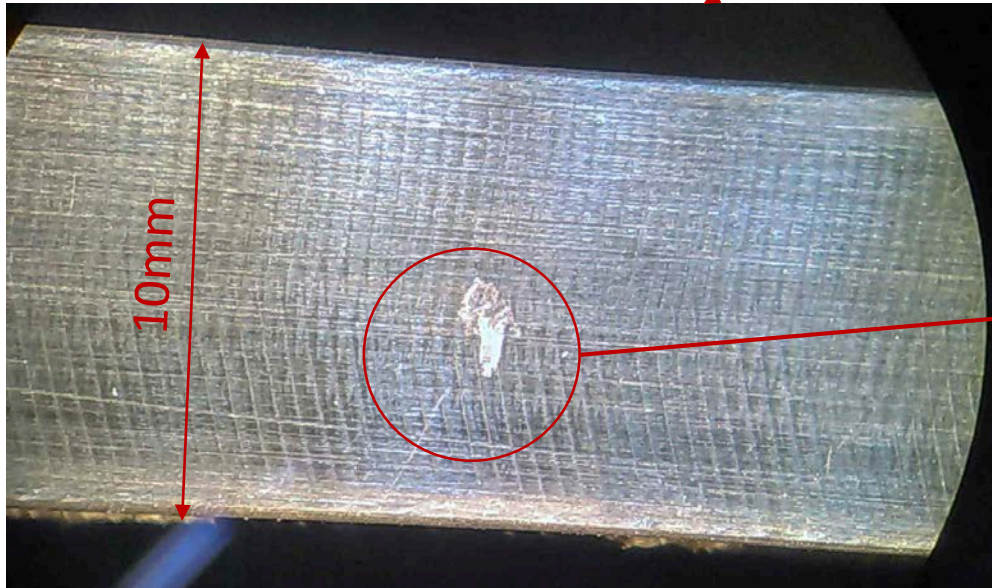


Machined face (from a block, not from a plate)

- Invar frame will be made from rectified plates
 - shallower « holes » on the surface, and deeper rectifying than previous test
- Even with no precaution storage, no special oxydation observed.
- Final frame will be rectified, assembled, welded, washed and stored in special plastic cover with dessicant to absorb humidity and avoid oxydation.


CRP Planarity and wires tension modeling

Initial geometry

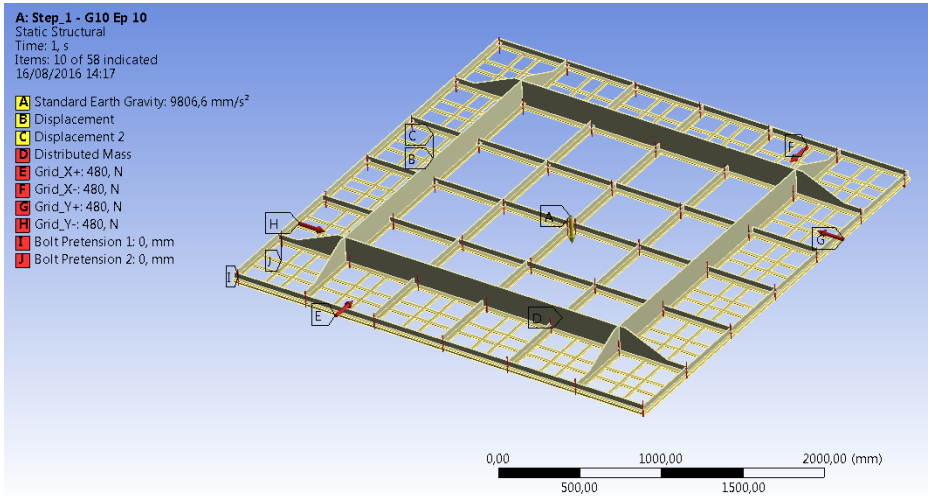

INVAR Frame :

- $H = 150 \text{ mm}$
- $h = 40 \text{ mm}$
- $E_p = 5 \text{ mm}$
- **Frame mass : 112,3 kg**

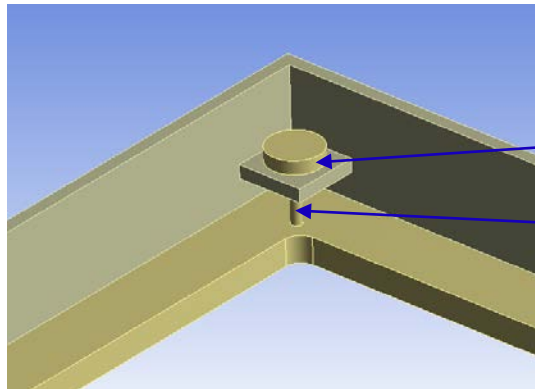

G10 Frame :

- **Thickness = 15 mm**
- **Frame mass : 67,7 kg**

Added Mass (for LEMs and electronic) : 150 kg

➤ Invar properties :

- $E = 139.000 \text{ MPa}$ minimum (around -150°C)
- $\nu = 0,228$
- $\rho = 8125 \text{ kg/m}^3$
- $\alpha = 1,5 \cdot 10^{-6} \text{ K}^{-1}$ between 22°C and -186°C


➤ G10 properties :

- Isostatic
- $E = 24.000 \text{ MPa}$ minimum (around -150°C)
- $\nu = 0,11$
- $\rho = 1850 \text{ kg/m}^3$
- $\alpha = 8 \cdot 10^{-6} \text{ K}^{-1}$ between 22°C and -186°C

➤ Stainless Steel properties (Extraction grid) :

- $E = 210.000 \text{ MPa}$ minimum (around -150°C)
- $\alpha = 1,36 \cdot 10^{-5} \text{ K}^{-1}$ between 22°C and -186°C
- Cables diameter : $0,1\text{mm}$
- Cable stiffness : $0,5498 \text{ N/mm}$

Initial geometry

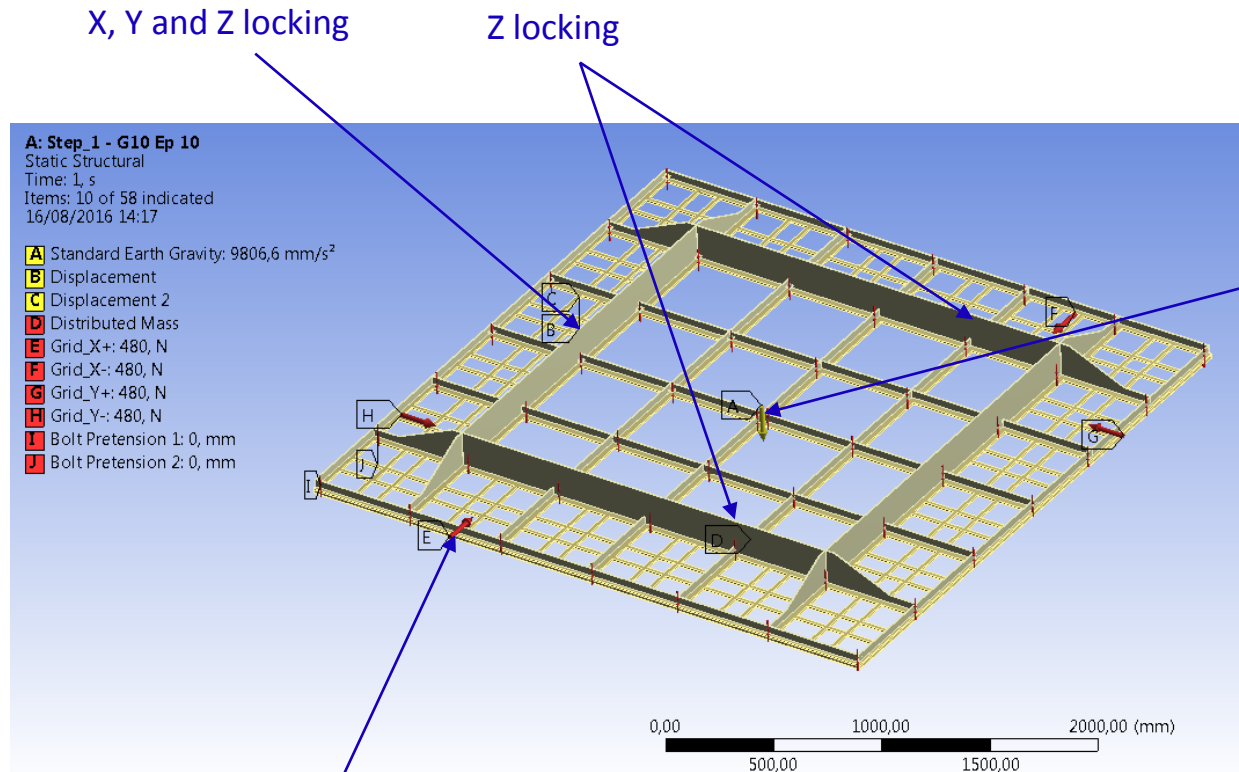


G10 and Invar locked on this point

All other links are only locking Z relative displacements

All link length can be adjusted for planarity tuning

Grid wires as springs (along each side of the module)

Step 1 : Module assembled, warm conditions, no tuning

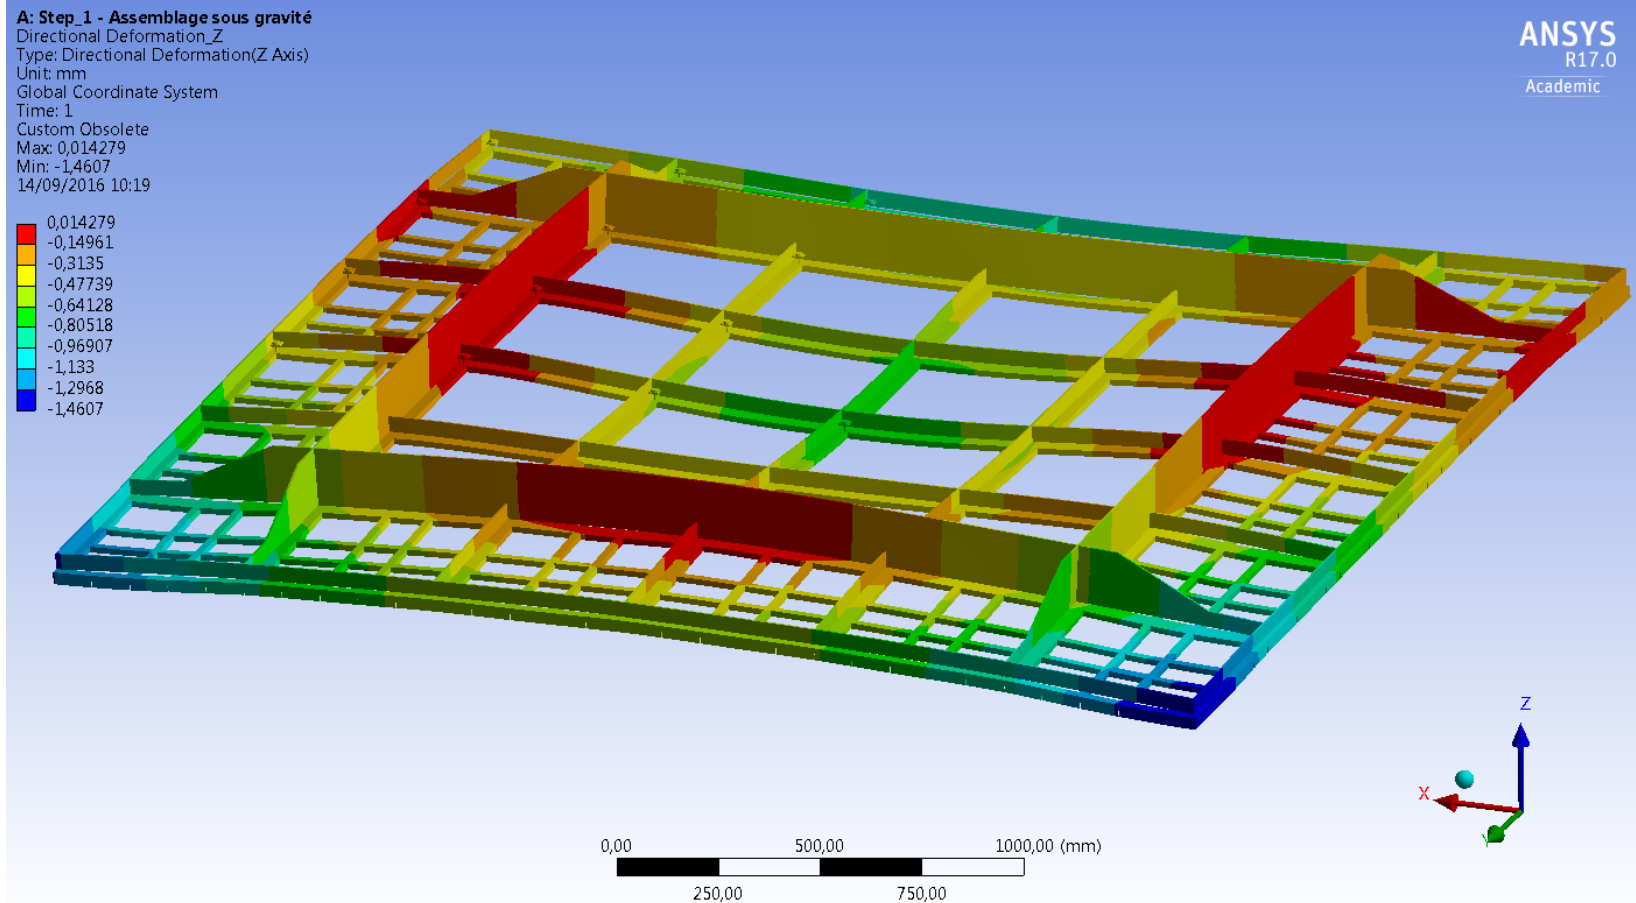



Loading case :

- Gravity
- No Grid tension : grid installed but not tightened


G10 Planarity results for step 1 – Tension init 1 mm

-1,460	-1,086	-0,837	-0,544	-0,276	-0,122	-0,297
-0,957	-0,598	-0,314	-0,083	-0,005	-0,198	-0,512
-0,685	-0,194	-0,315	-0,445	-0,372	-0,358	-0,855
-0,570	-0,002	-0,370	-0,693	-0,596	-0,433	-1,004
-0,635	-0,158	-0,291	-0,432	-0,372	-0,370	-0,880
-0,858	-0,524	-0,265	-0,070	-0,004	-0,221	-0,559
-1,312	-0,975	-0,764	-0,525	-0,273	-0,156	-0,365

Mini	-1,460
Maxi	-0,002
Delta	1,458

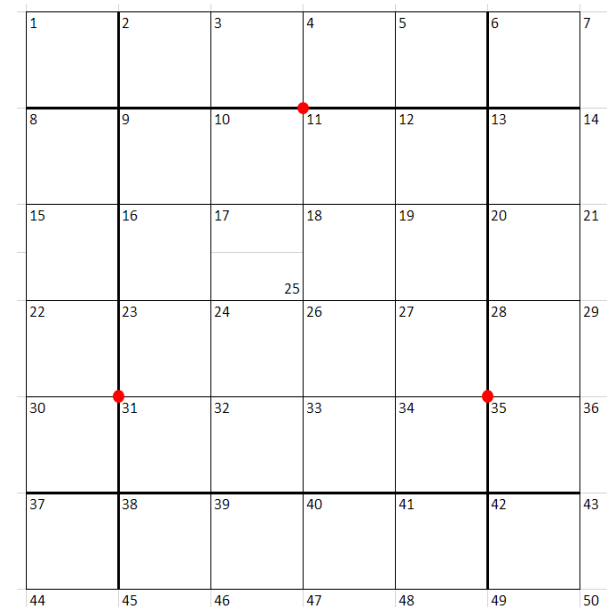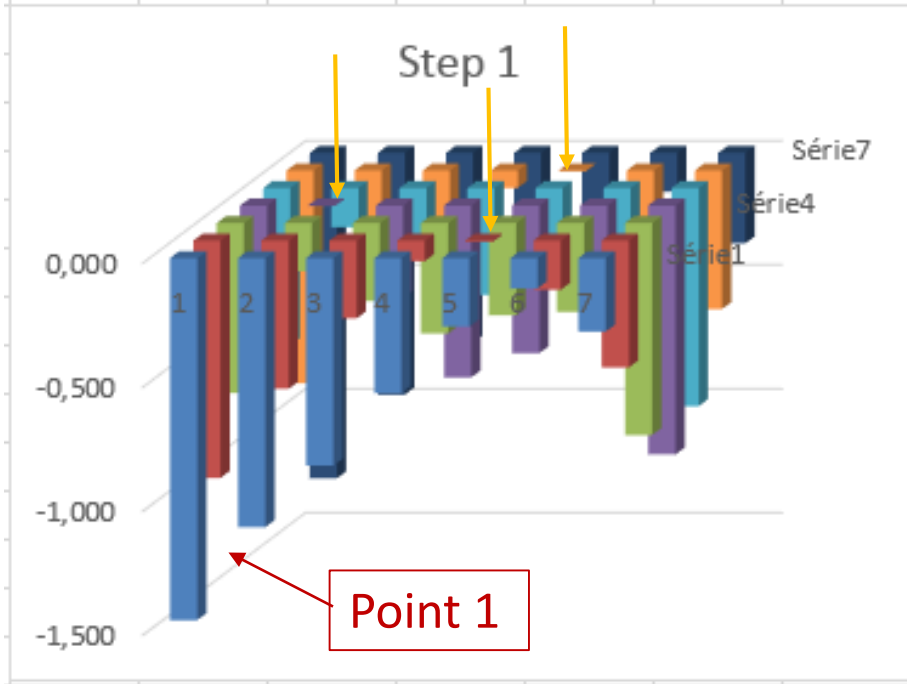

Step 2 : Module assembled, warm conditions, Planarity tuned

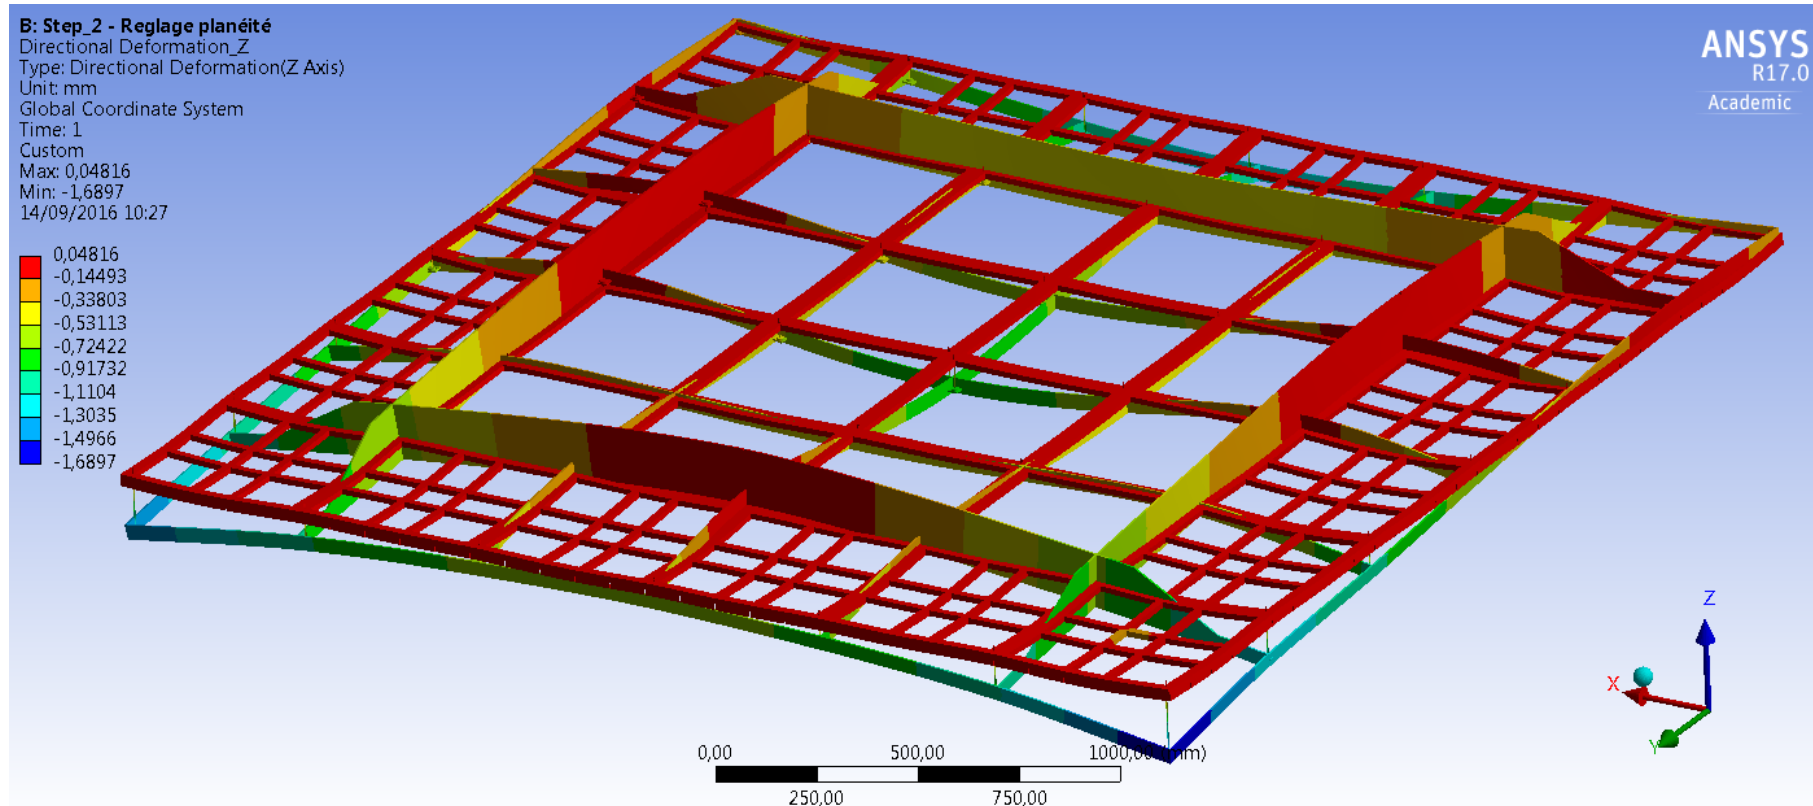

Loading case :



- Gravity
- No Grid tension : grid installed but not tightened
- Planarity tuning

G10 Planarity results for step 2 (2nd tuning iteration) – Tension init 1 mm


0,0025	-0,01	-0,027	-0,034	-0,023	0,0027	0,0357
-0,008	-0,006	-0,003	-0,001	0,0004	0,0013	0,0018
-0,022	-0,002	0,0049	0,0067	0,0076	0,0004	-0,028
-0,027	0,0003	0,0063	0,0065	0,0083	-3E-04	-0,04
-0,017	0,0019	0,0077	0,008	0,0077	-0,001	-0,031
0,0036	0,0028	0,0025	0,0018	0,0005	-0,002	-0,004
0,0207	0,0035	-0,018	-0,029	-0,023	-0,002	0,0267

Mini	-0,040
Maxi	0,036
Delta	0,076

Step 2

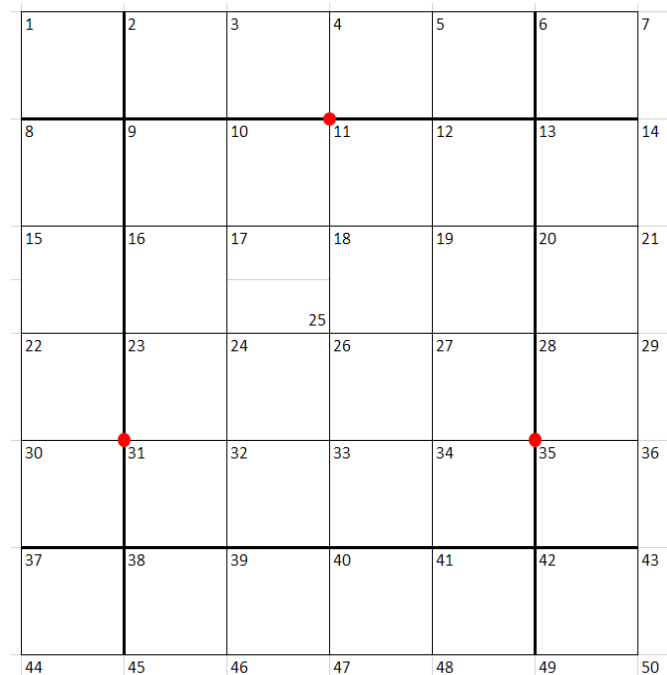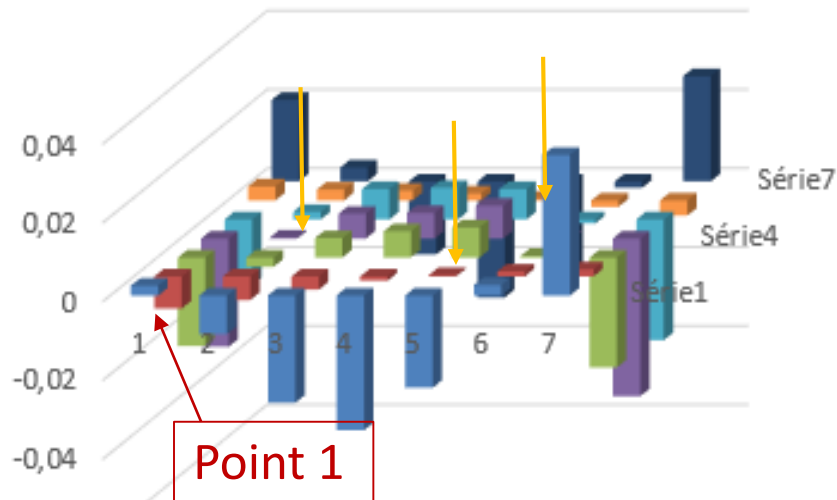


Planarity tuning independency

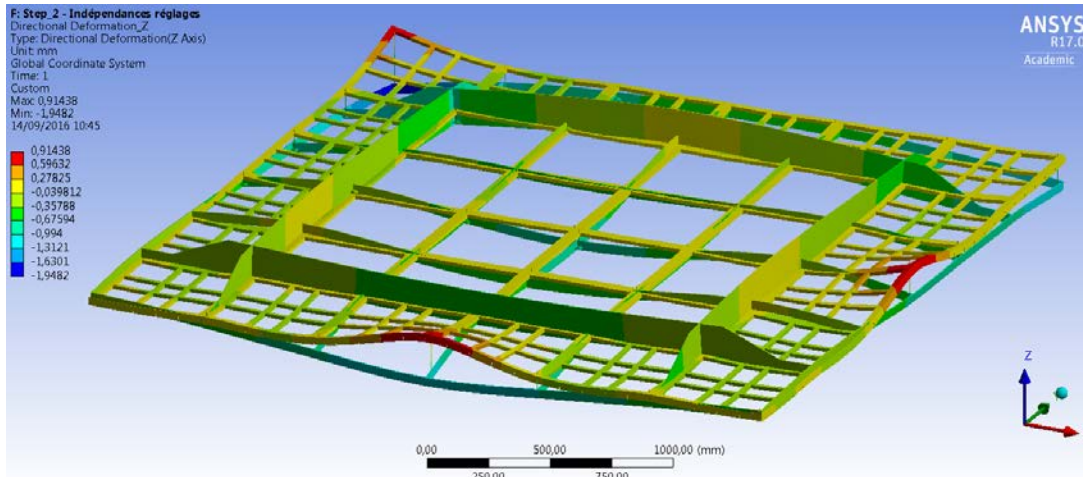

Loading case :

- Gravity
- No Grid tension : grid installed but not tightened
- Planarity tuning
- +1mm perturbations on points 1 - 29 - 47


+1mm on those points

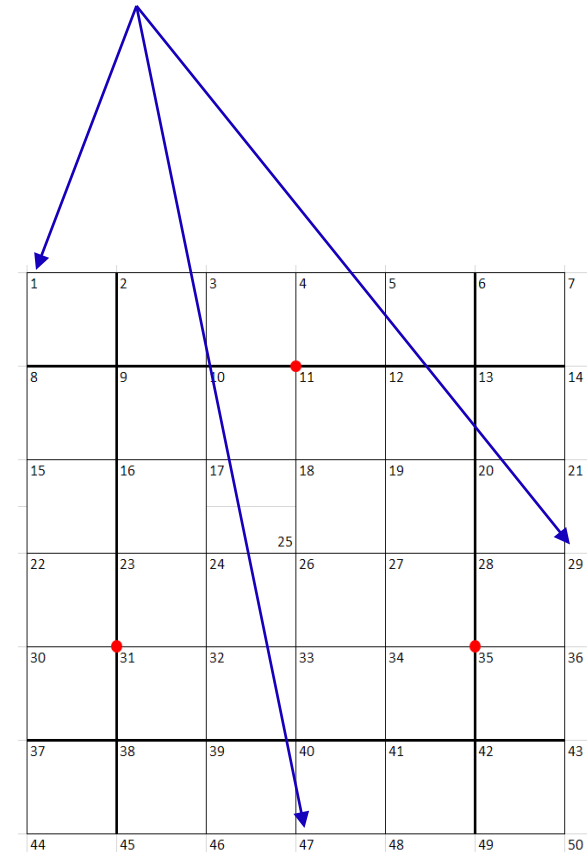


Planarity tuning independency

-0,005	-0,009	-0,019	-0,023	-0,016	0,003	0,027	0,674	-0,088	-0,038	-0,030	-0,011	0,029	0,083	0,679	-0,078	-0,019	-0,007	0,005	0,027	0,056
-0,008	-0,006	-0,003	-0,001	0,000	0,001	0,002	-0,078	-0,061	-0,040	-0,018	0,000	0,018	0,038	-0,070	-0,055	-0,036	-0,017	-0,001	0,016	0,035
-0,015	-0,003	0,000	0,000	0,003	0,000	-0,020	-0,016	-0,030	-0,024	-0,006	0,011	0,008	-0,032	-0,001	-0,027	-0,024	-0,006	0,009	0,008	-0,013
-0,017	0,000	0,000	-0,002	0,002	-0,001	-0,029	0,001	-0,001	0,001	0,011	0,026	0,003	0,801	0,018	-0,001	0,001	0,013	0,024	0,003	0,829
-0,009	0,002	0,003	0,001	0,003	-0,001	-0,022	0,030	0,028	0,028	0,034	0,022	-0,009	-0,071	0,040	0,026	0,026	0,032	0,019	-0,008	-0,049
0,004	0,003	0,002	0,002	0,000	-0,002	-0,003	0,075	0,054	0,036	0,023	0,001	-0,017	-0,032	0,071	0,052	0,034	0,022	0,001	-0,016	-0,028
0,013	0,004	-0,011	-0,019	-0,016	-0,002	0,019	0,123	0,083	0,011	0,839	-0,045	-0,021	-0,007	0,110	0,080	0,021	0,858	-0,029	-0,019	-0,026


Sans perturbation

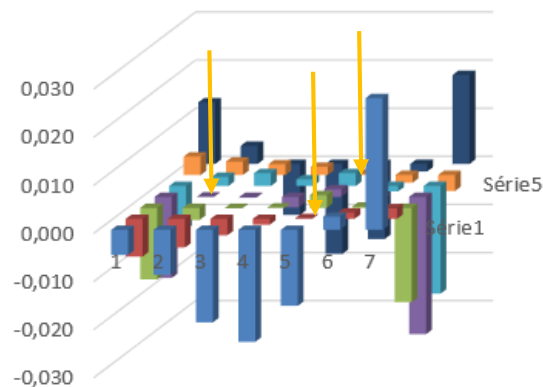


Avec perturbation

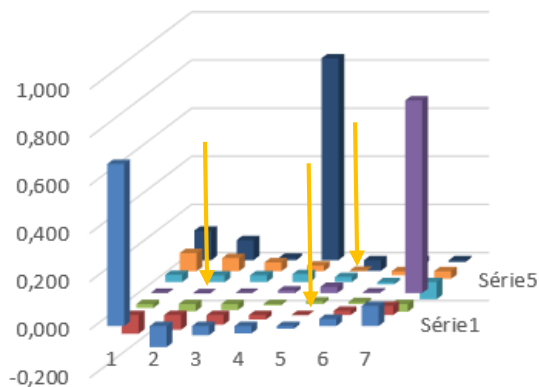

Différence Sans/Avec

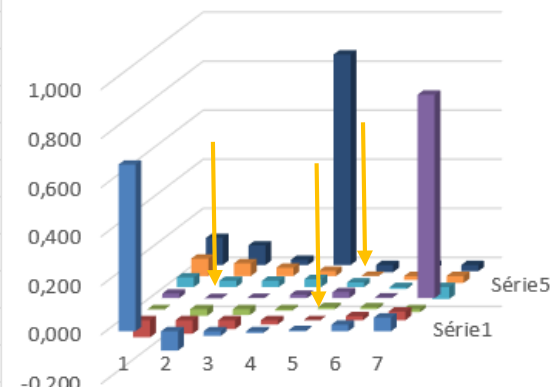

Step 3 : Module assembled, warm conditions, maxi grid tension

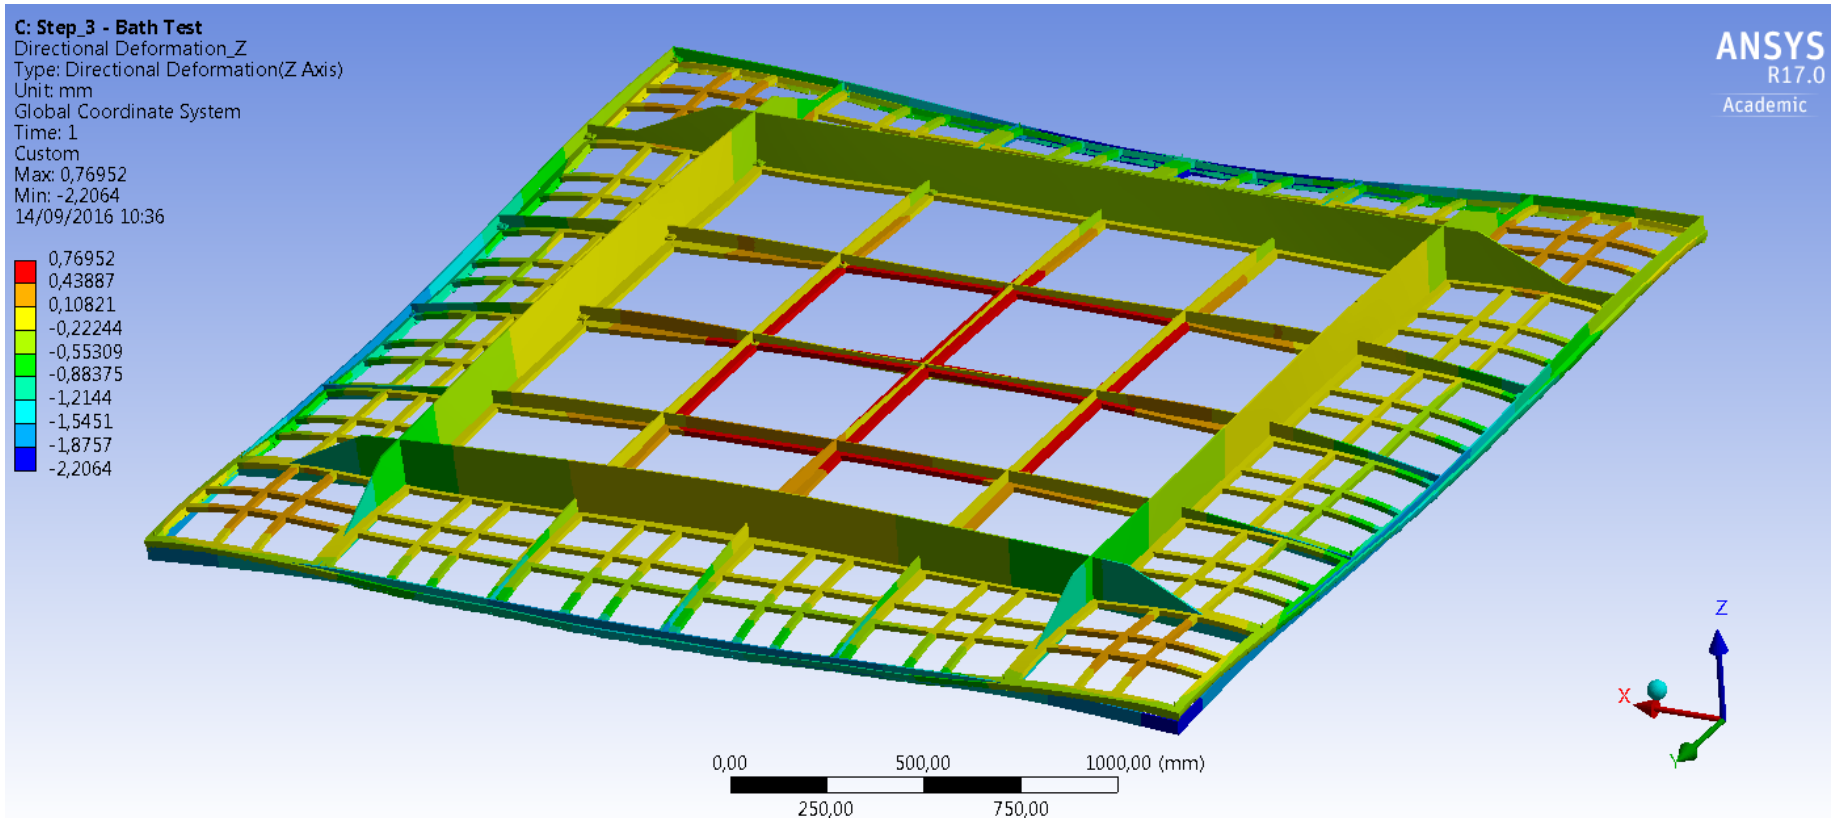



Loading case :

- Gravity
- Grid tension : -10,51mm (thermal contraction with $\alpha=1,7 \times 10^{-5}$) – tension measured $\sim 5,3\text{N/cable}$
- Planarity tuning from Step 2


G10 Planarity results for step 3 – Tension Init 1 mm

-0,257	-0,289	-0,67	-0,843	-0,642	-0,233	-0,157
-0,296	-0,113	-0,005	0,0411	0,0182	-0,064	-0,226
-0,677	-0,014	0,3588	0,49	0,3826	0,0273	-0,636
-0,855	0,0221	0,4745	0,622	0,5042	0,0599	-0,831
-0,671	-0,009	0,3619	0,6229	0,3828	0,0258	-0,641
-0,284	-0,103	0,0009	0,491	0,0183	-0,068	-0,233
-0,238	-0,276	-0,662	0,0435	-0,642	-0,238	-0,166

Mini	-0,855
Maxi	0,623
Delta	1,478

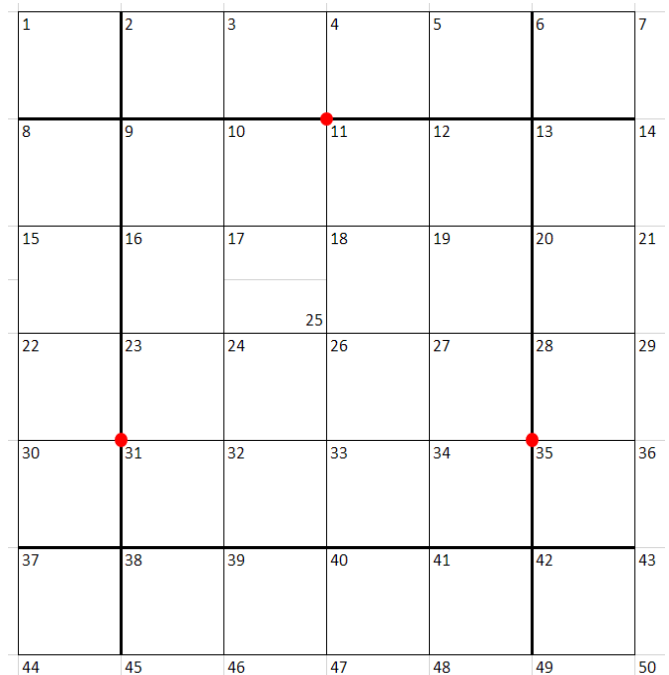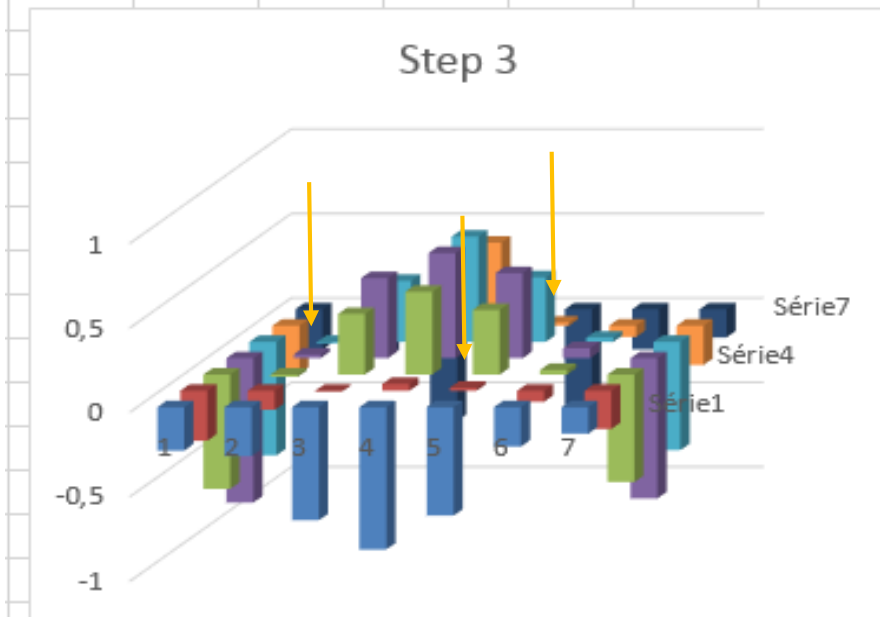

Tension in the extraction grid – Tension Init 1 mm

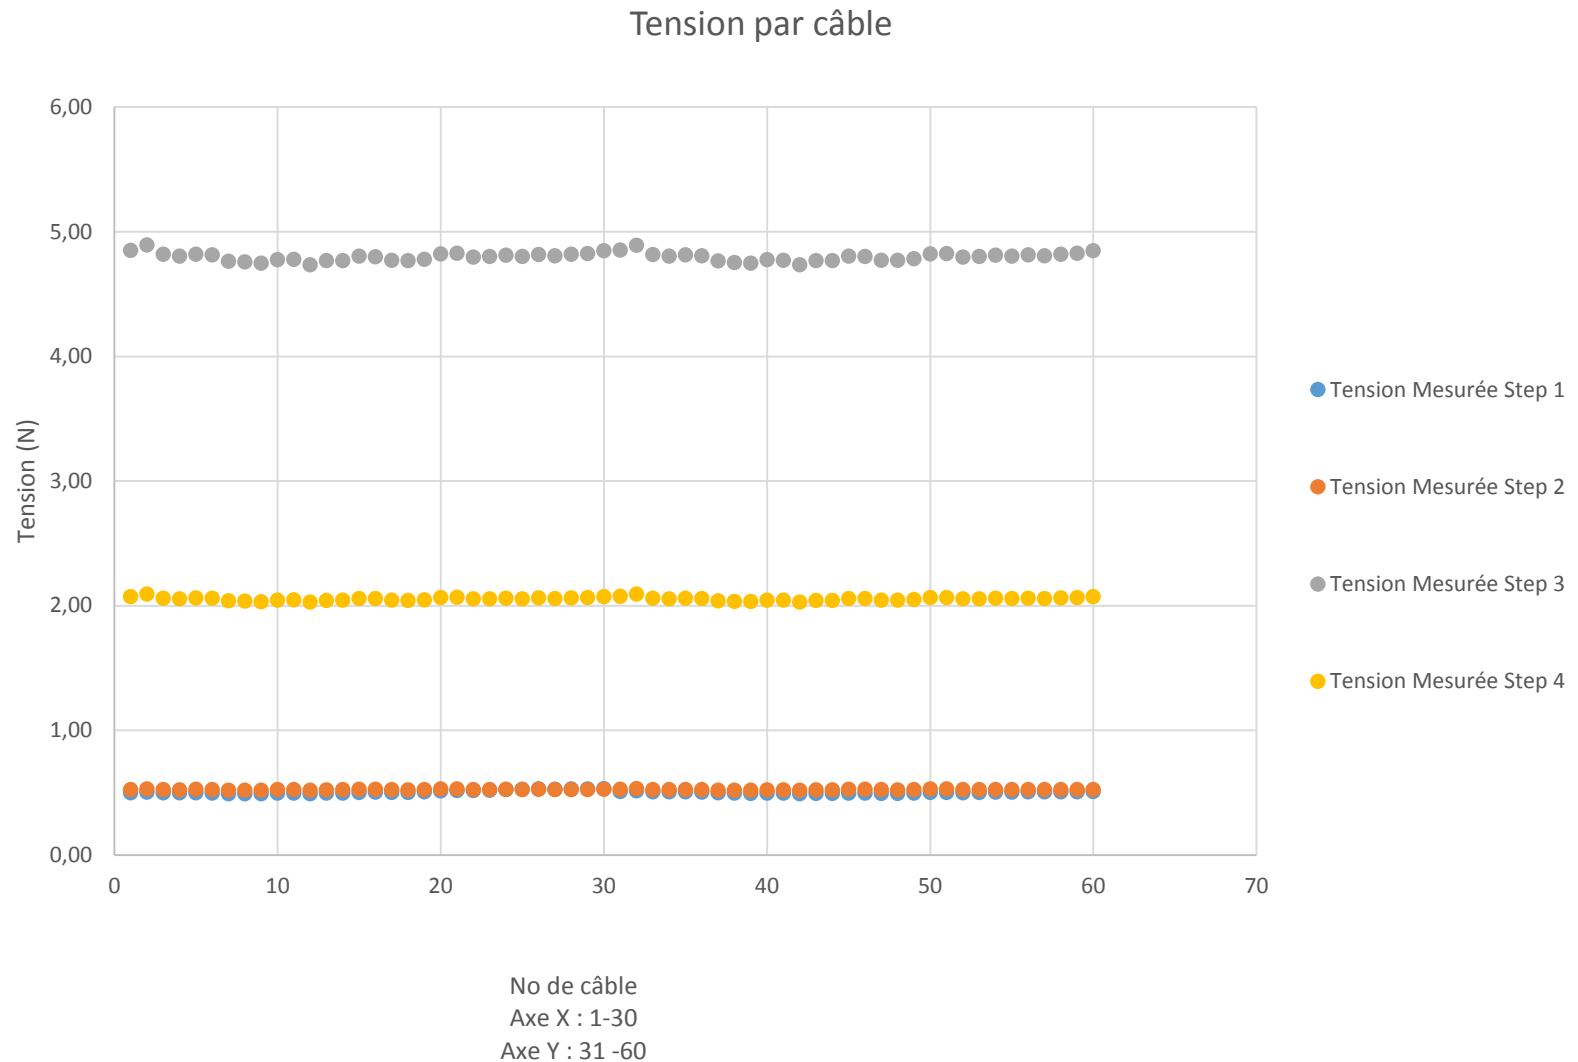


Step 4 : Module assembled, Cold conditions, final grid tension

E: Step_4 - Config Finale

Directional Deformation_Z
Type: Directional Deformation(Z Axis)
Unit: mm
Global Coordinate System
Time: 1
Custom
Max: 0,29855
Min: -1,7542
14/09/2016 10:40

0,29855
0,070459
-0,15763
-0,38572
-0,61381
-0,84189
-1,07
-1,2981
-1,5262
-1,7542

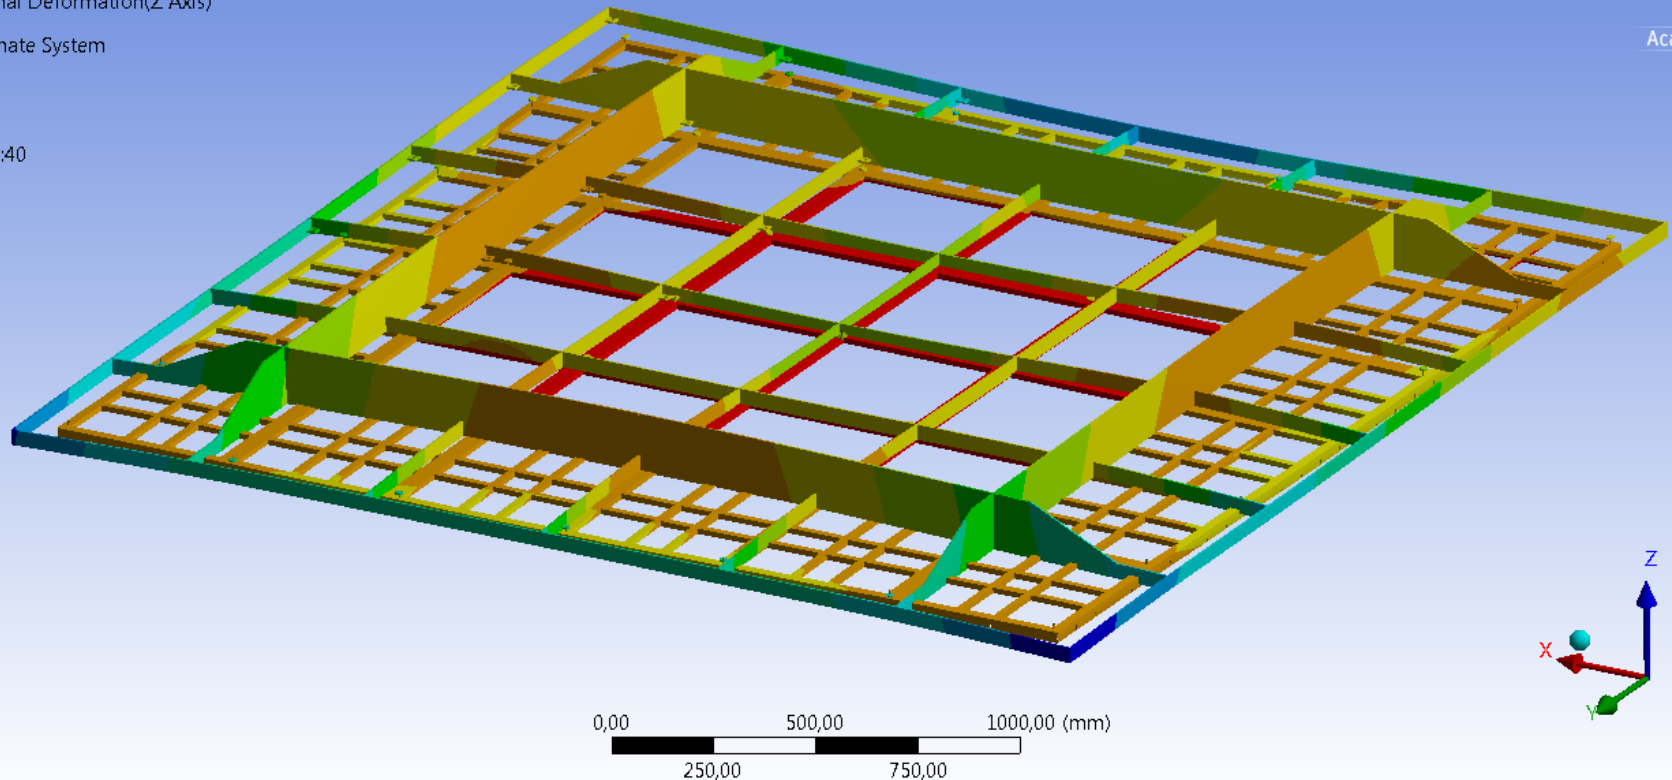

Loading case :



- Gravity
- Grid tension : -10,51mm (thermal contraction with $\alpha=1,7 \times 10^{-5}$) – final tension measured $\sim 1,5 - 1,6$ N/cable
- Planarity tuning from Step 2
- Temperature : -186°C

G10 Planarity results for step 4 – Tension Init 1 mm


-0,058	-0,08	-0,248	-0,324	-0,238	-0,058	-0,009
-0,083	-0,008	0,0362	0,055	0,0453	0,0107	-0,056
-0,249	0,0326	0,1878	0,2422	0,1982	0,0486	-0,239
-0,327	0,047	0,2349	0,2965	0,2484	0,062	-0,325
-0,249	0,0333	0,1885	0,2969	0,1982	0,0483	-0,24
-0,082	-0,007	0,0366	0,242	0,0455	0,0103	-0,057
-0,056	-0,08	-0,248	0,0548	-0,238	-0,058	-0,01

Mini	-0,327
Maxi	0,297
Delta	0,624

Step 4

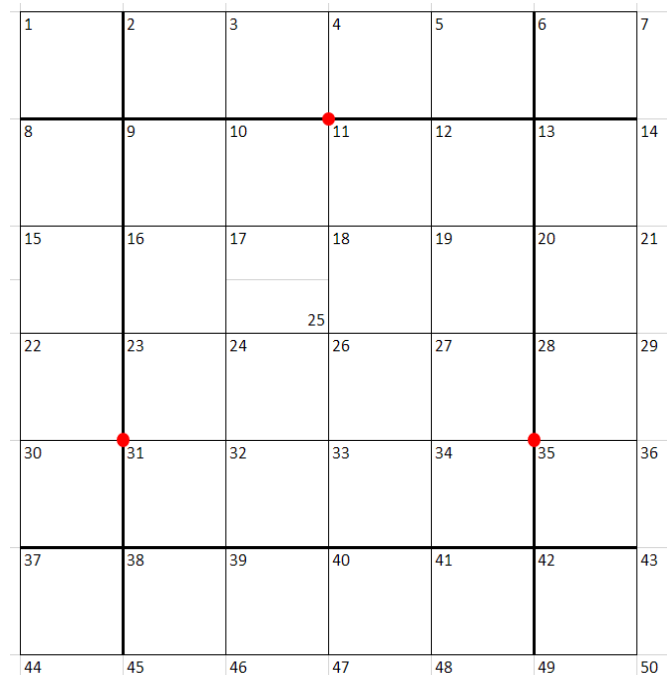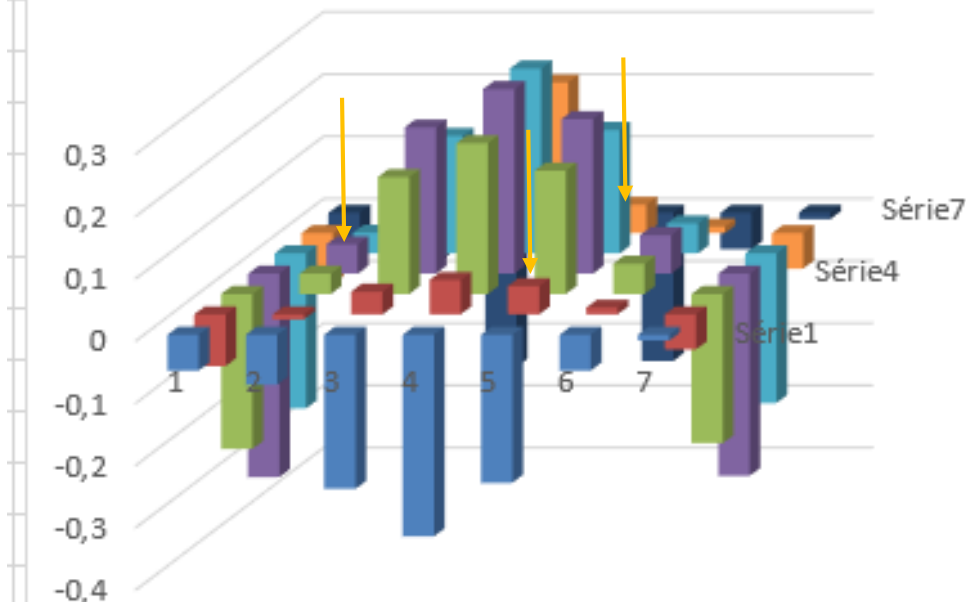


Tension in the extraction grid for Step 3 & 4

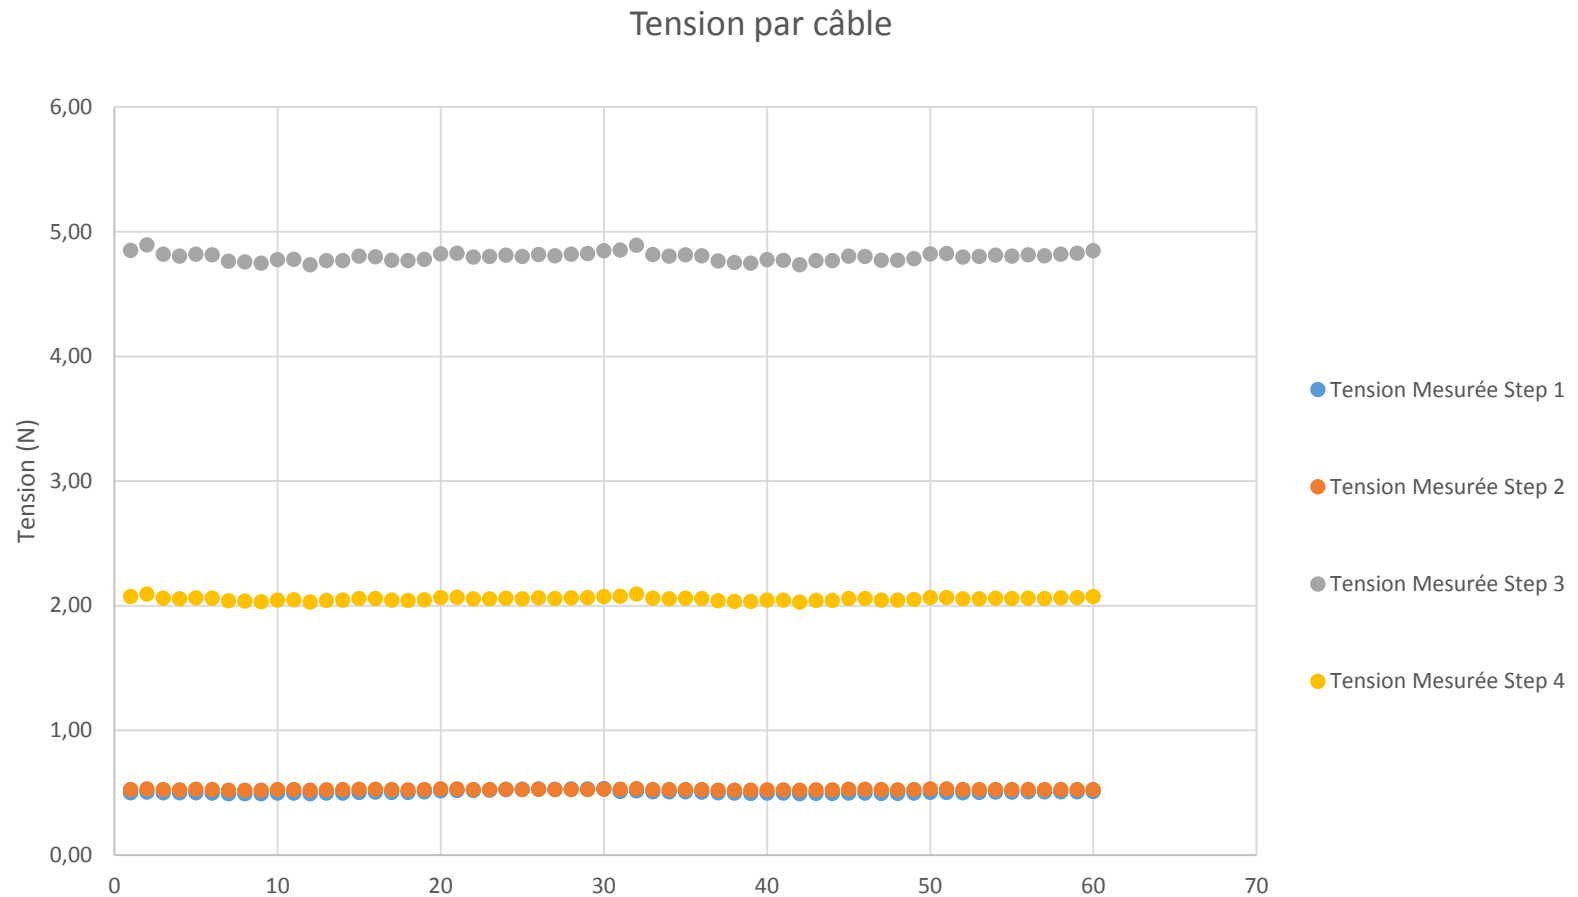


No de câble
Axe X : 1-30
Axe Y : 31 -60

Wires are breaking at 15 N

Suspension Feedthrough


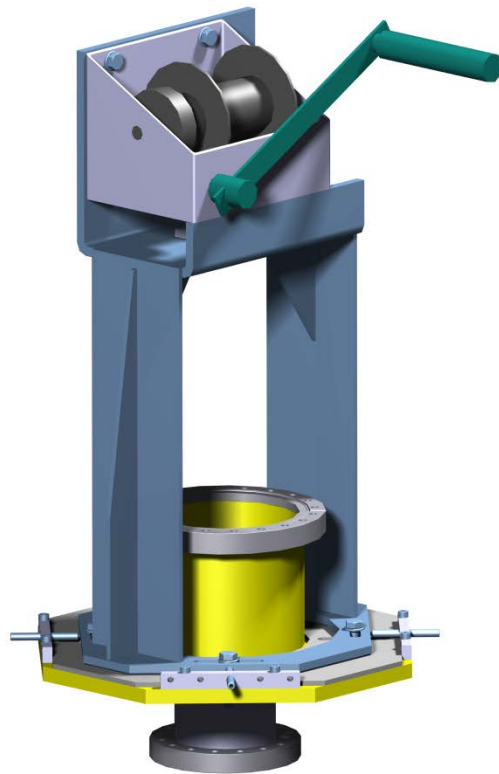


SPFTs on detector's roof

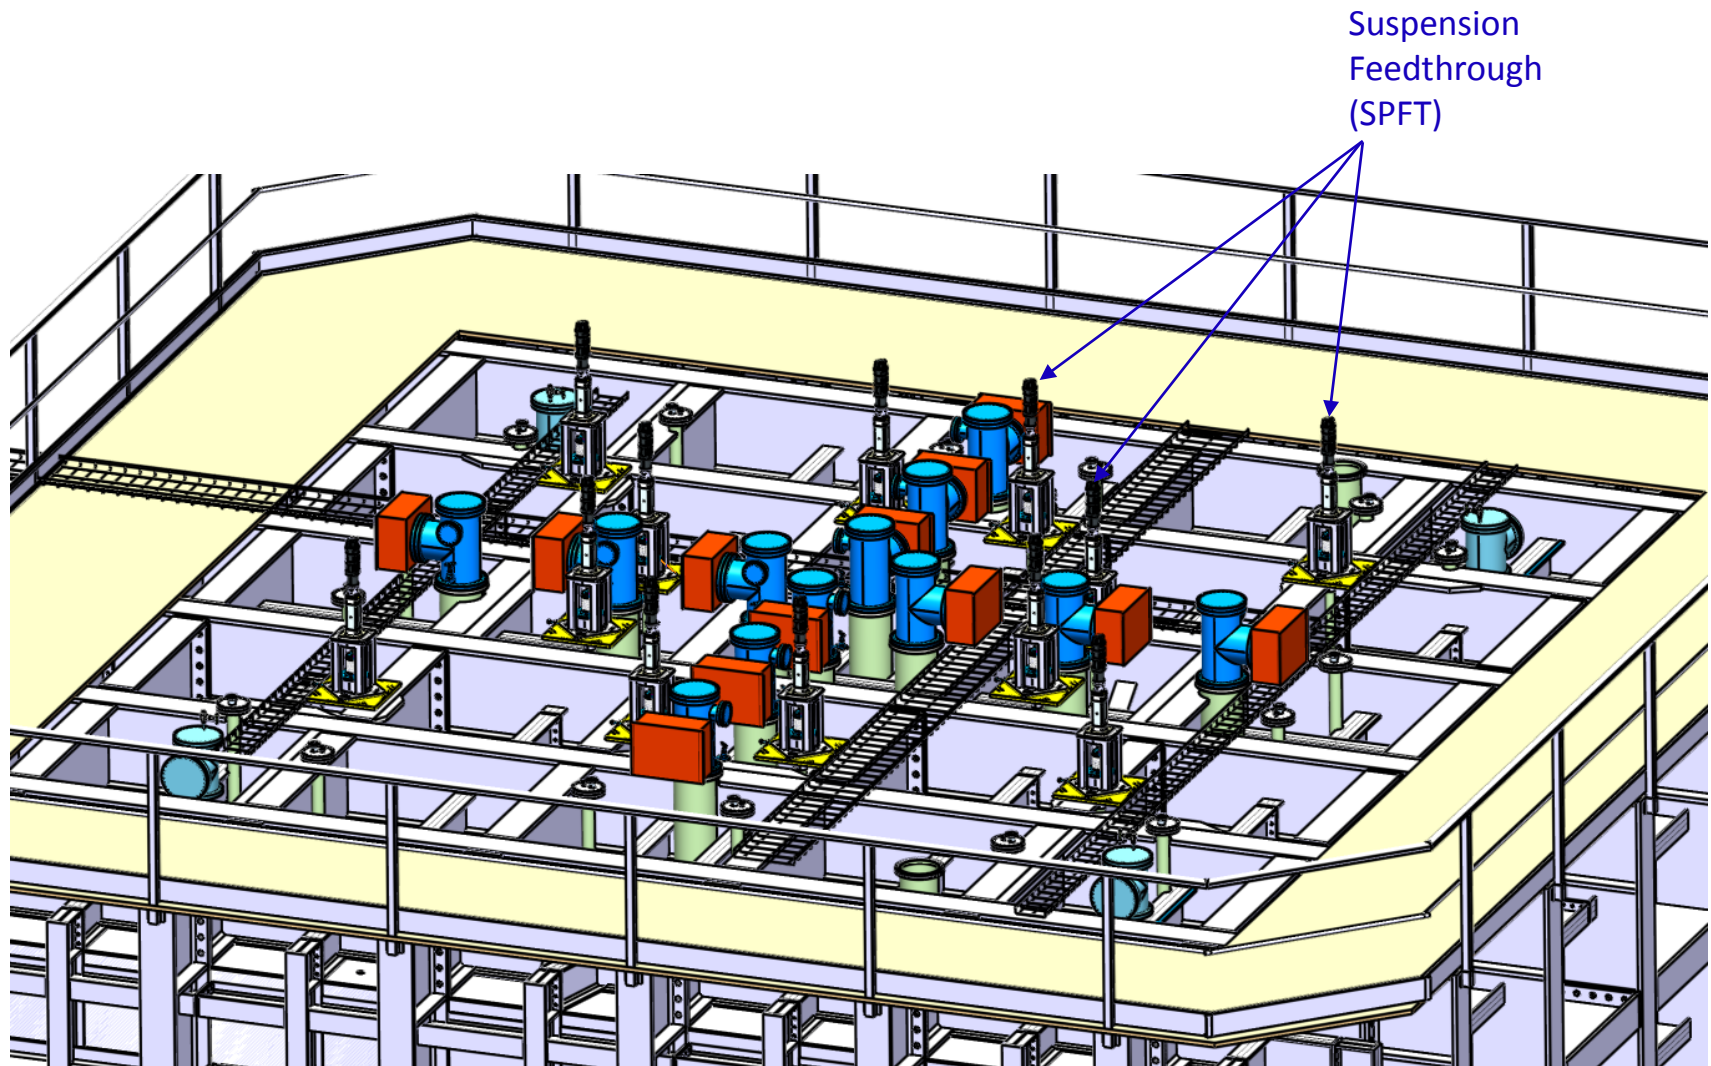



Design & features – Overview

- GAr volume completely closed
 - *no sliding parts,*
 - *no moving sealing*
- Movement absorbed by lateral deformation of the bellow

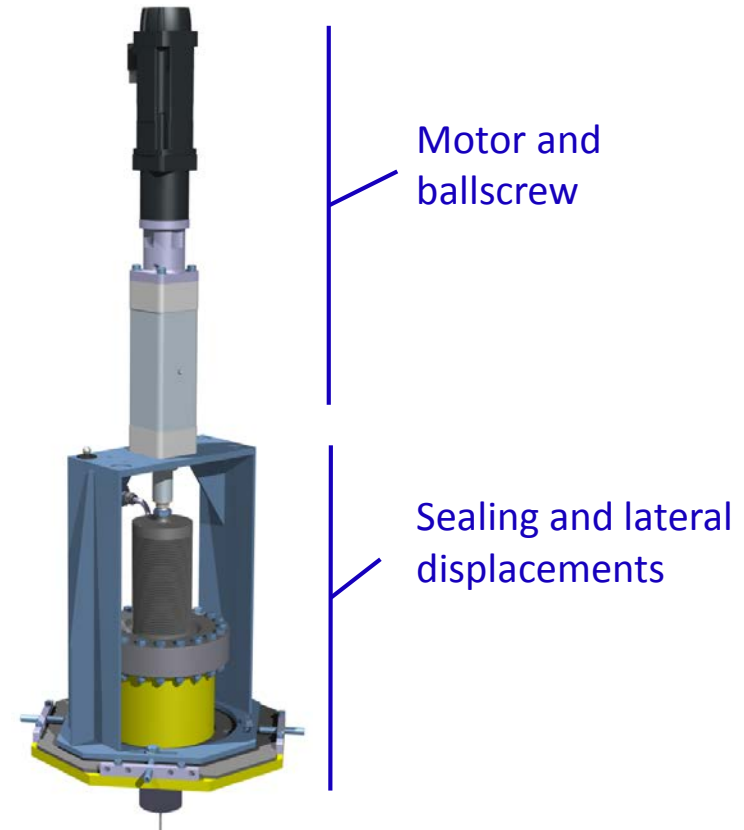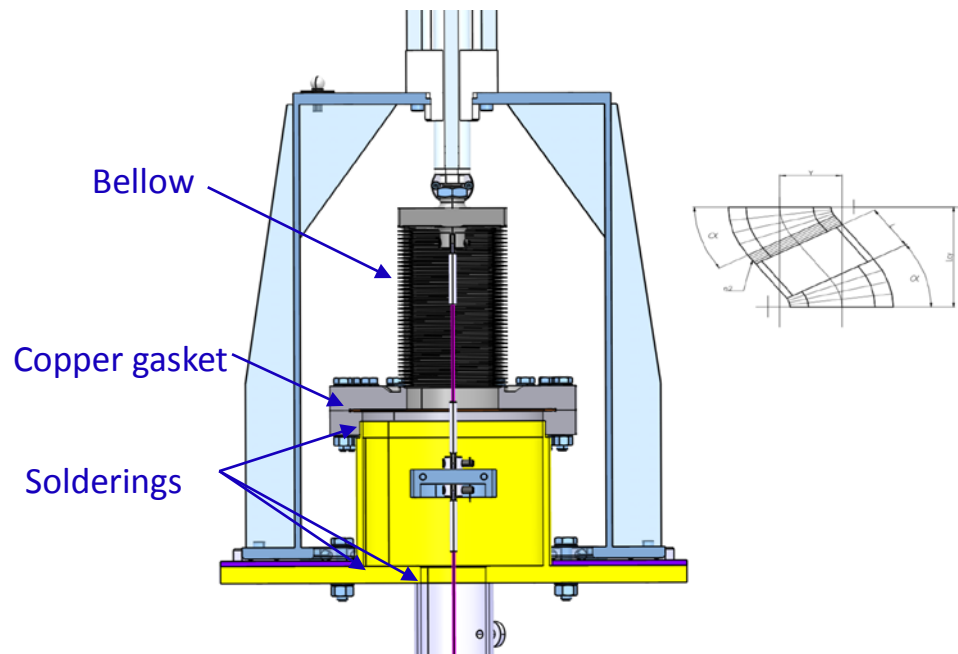





Design & Features – Vertical displacements

- Vertical stroke : **98mm**
 - Even with max lateral displacement
- Lateral stroke : **+/- 26mm**
 - Displacement in a circle $\varnothing 52\text{mm}$

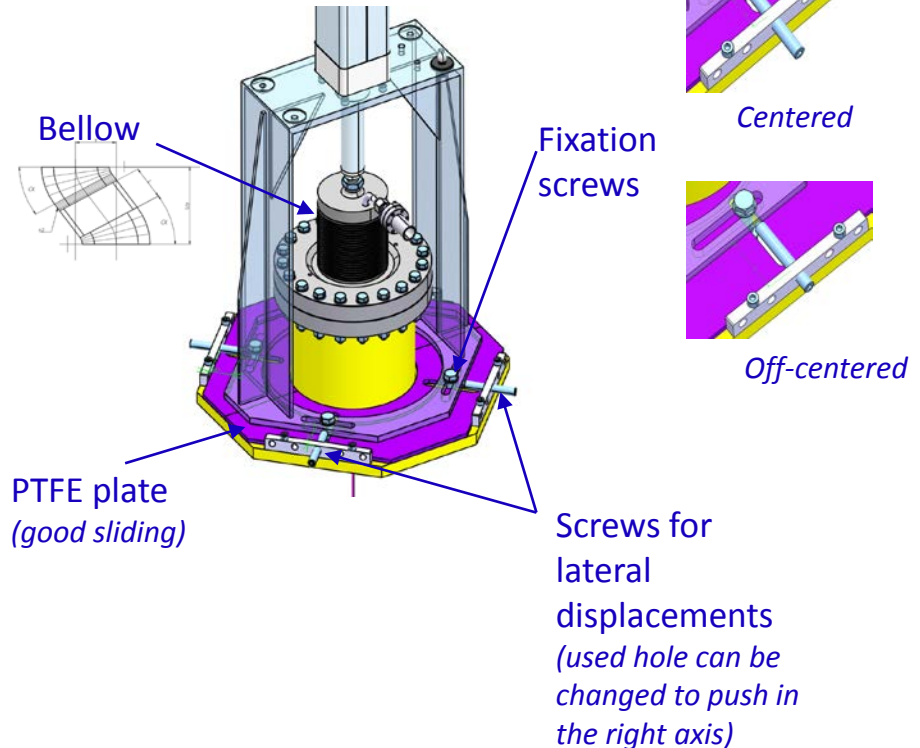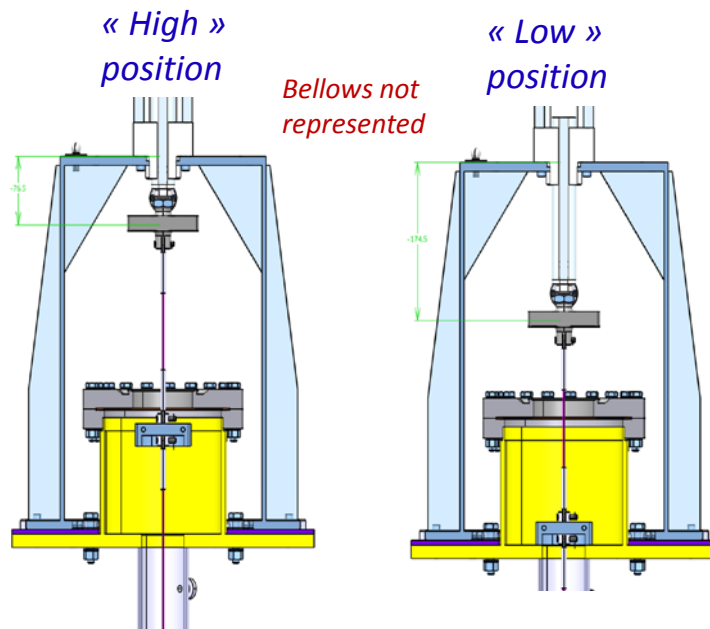


Design & Features – Additionnal features

- Special slot for Laser Tracker target
 - *SPFT position monitoring during installation*
- Mechanical stop and chimney simple obstruction for maintenance or bellow replacement
- Air purge at the highest point for best GAr purity

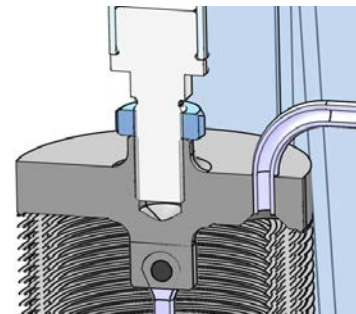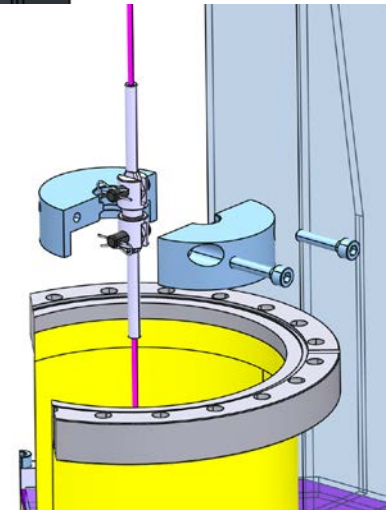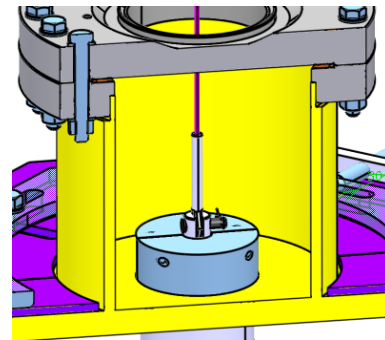




Suspension cables anchoring system

- In case of variation of the cryostat pipes verticality, this system allows to change anchoring point on module, in warm conditions
- In cold condition, this is done with SPFTs positions
- Those devices have been validated by FEA, and suspension cables are certified by manufacturer (see HSE report for more details)

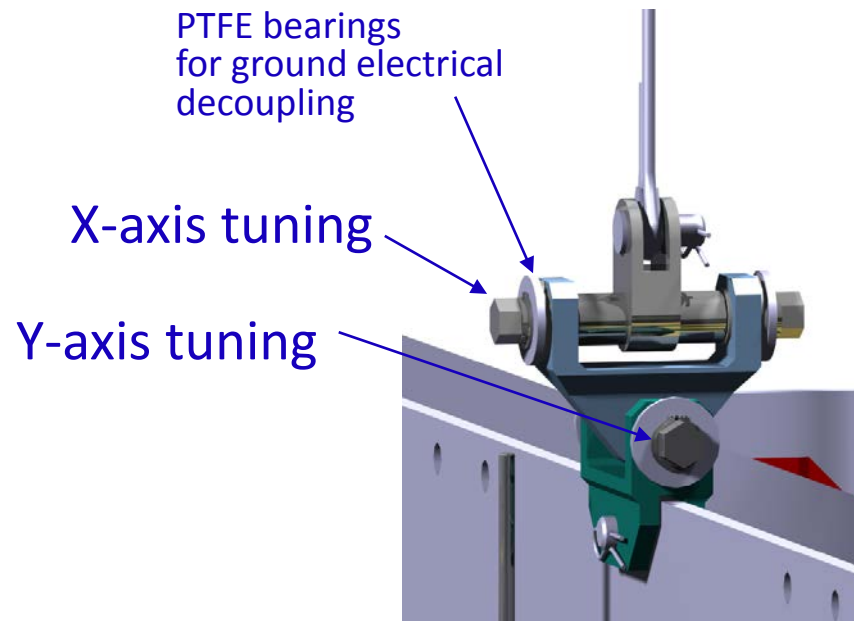


FEA Calculation Procedure

- Each non-standard device is validated by FEA calculation
 - Material properties from trusted sources
 - Use of $R_{p0,2}$
 - Boundary conditions :
 - for suspended loads, (total mass+10%) is taken in account
 - Operation configuration / Worst configuration
 - Design is validated if the max stress is less than $R_{p0,2}$ with a safety factor of 5
 - Details on FEA calculations are given in the HSE document

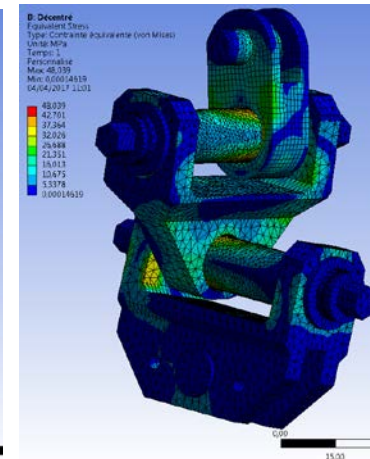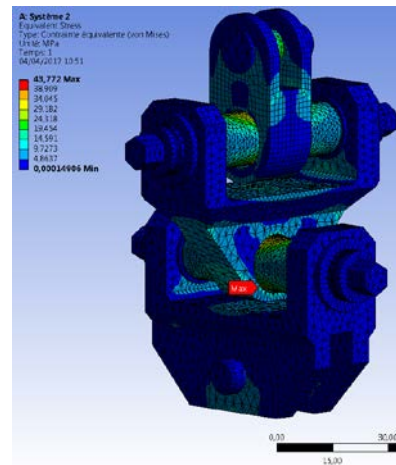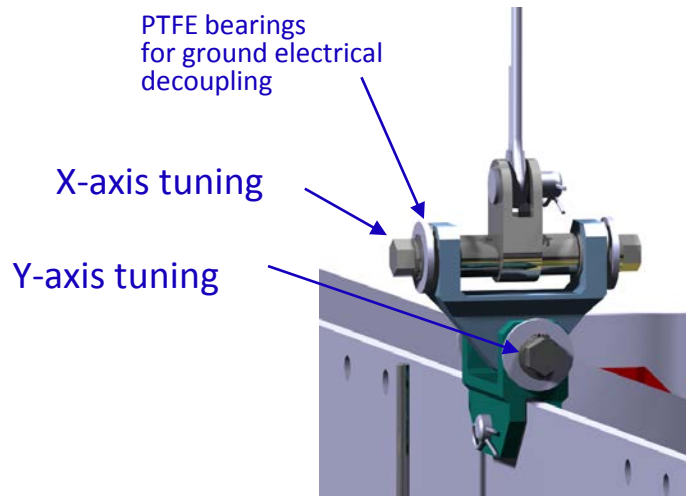


CRP Position Control : principle

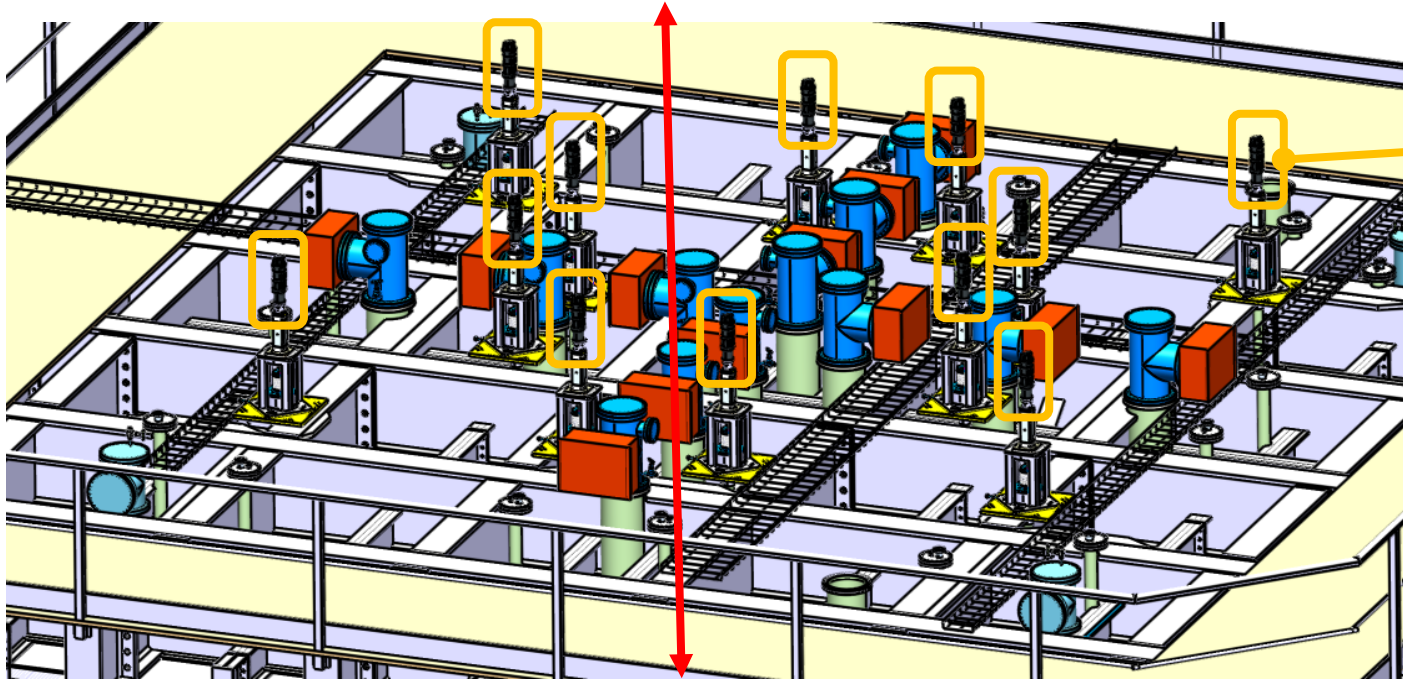

- Tuning:
 - Each motor could be controlled independently
- Process:
 - **Command of a virtual master axis : 1 command / whole system**
 - **The 12 motors (real axes) are the slaves of the virtual one**
- *Position of the CRP is measured by the motors encoders, the levels meters and the LEM capacitive measurements*
- *Nominal displacement of +/- 20 mm*

CRP Position control : integration

- Control architecture
 - Extension of the 3x1m configuration / cabinet

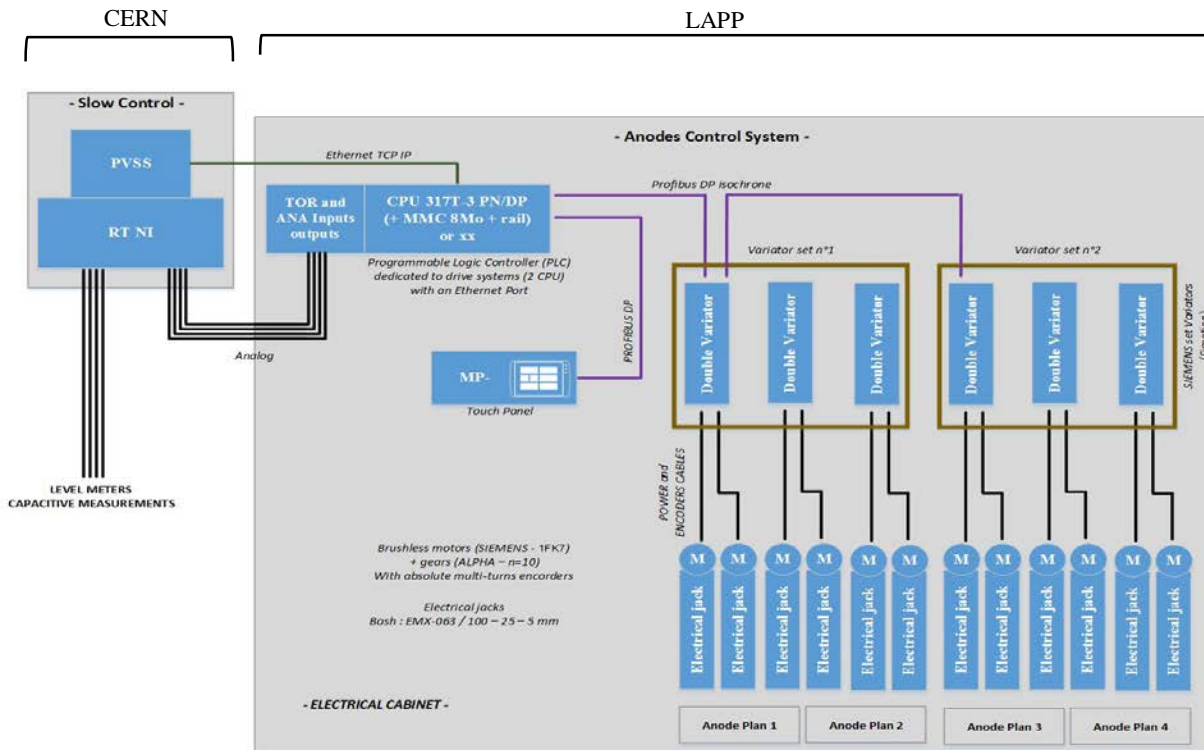

- System architecture -

- The 3x1m devices are kept and completed
- The rack will be extended (cabling on the two sides of the cabinet)

- Current 3x1m cabinet -



➤ Extension of PLC configuration vs the I/O quantity

➤ Extension of variators configuration vs the additional motors

➤ New Power supply processing