

MODEL A58HB - ABSOLUTE HOLLOW BORE ENCODER





Ø58 mm

FEATURES

Single Turn/Multi-Turn Absolute Encoder (16 Bit ST / 43 Bit MT) SSI or CANopen Communication


Maintenance-Free and Environmentally Friendly All-Magnetic Design Energy Harvesting Magnetic Multi-Turn Technology No Gears or Batteries

58 mm (2.28") Diameter Hollow Bore (Blind) Encoder Flex Mount Eliminates Couplings and Is Ideal for Motors or Shafts Meets CE/EMC Standards for Immunity and Emissions

The Model A58HB Absolute Encoder offers a high performance solution for your absolute feedback needs. It provides maintenance-free feedback thanks to its innovative battery-free and gear-free multi-turn technology. This encoder is especially suited for applications where position information must be retained after loss of system power. Its rugged magnetic technology and high IP rating make the Model A58HB an excellent choice, even in tough industrial environments. Available with bores up to 3/8" or 14 mm and two flexible mounting options, the Model A58HB is easily designed into a variety of applications.

COMMON APPLICATIONS

Robotics, Telescopes, Antennas, Medical Scanners, Wind Turbines, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

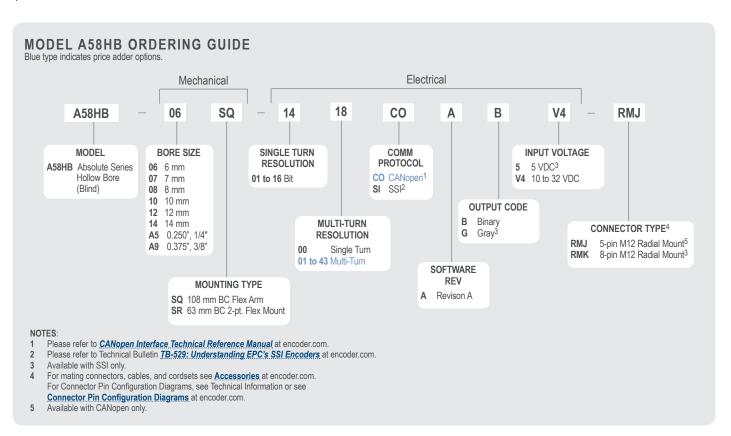



MODEL A58HB SPECIFICATIONS

Electrical

Input Voltage..... 10 to 32 VDC max

5 VDC SSI Only

Input Current50 mA typical for 10 to 32 VDC

80 mA typical for 5 VDC

Power: Consumption...0.5 W max Resolution (Single) ...01 to 16 bit Resolution (Multi)01 to 43 bit Accuracy \pm 0.35° Repeatability \pm 0.2°

CE/EMCImmunity tested per EN 61000-6-2:2006

Emissions tested per EN 61000-6-3:2011

CANopen Interface

Protocol......CANopen:

Communication profile CiA 301

Device profile for encoder CiA 406 V3.2

class C2

Node Number 1 to 127 (default 127)

Baud Rate.....10 Kbaud to 1 Mbaud with automatic bit

rate detection

Note: The standard settings, as well as any customization in the software, can be changed via LSS (CiA 305) and the SDO protocol (e.g., PDOs, scaling, heartbeat, node-ID, baud rate, etc.).

Programmable CANopen Transmission Modes

transmitted independently.

Asynchronous........ A PDO message is triggered by an internal

event (e.g., change of measured value,

internal timer, etc.).

SSI Interface

Clock InputVia opto-coupler

Clock Frequency...... 100 kHz to 500 kHz. Higher frequencies

may be available. Contact Customer

Service.

Data OutputRS485 / RS422 compatible

Output Code Gray or binary

SSI Output Angular position value

Parity Bit.....Optional (even/odd)

Error Bit.....Optional

Turn On Time< 1.5 sec

Pos. Counting Dir..... Connect DIR to GND for CW

Connect DIR to VDC for CCW (when viewed from shaft end)

... Yes, see Technical Bulletin TB529:

Understanding EPC's SSI Encoders

Protection Galvanic Isolation with SSI option

Mechanical

Max Shaft Speed 6000 RPM Shaft Rotation Bi-directional

Radial Run-out 0.007" max

Axial Endplay.....± 0.030" max

Radial Shaft Load 17 lb (80 N) = bearing life of

1x10⁹ revolutions

Axial Shaft Load11 lb (50 N) = bearing life of

1x10⁹ revolutions

Starting Torque 2.3 oz-in typical

Housing All metal with protective finish

Bearings.....2 precision ball bearings

Weight......7.5 oz typical


Environmental

Operating Temp-40° to 85° C Storage Temp-40° to 100° C


Shock......100 g (6 ms)

Sealing......IP67, shaft sealed to IP65

MODEL A58HB 108 MM BC FLEX ARM (SQ)

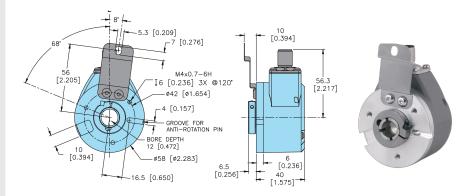

MODEL A58HB 63 MM 2 PT. FLEX MOUNT (SR)

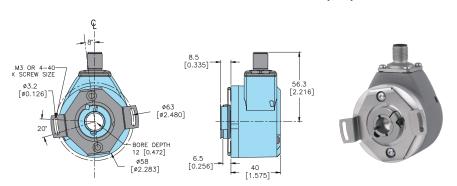

Primary dimensions are in mm, secondary dimensions SI units [inches] in brackets for reference only.

WIRING TABLE

For EPC-supplied mating cables, refer to wiring table provided with cable.

For CE (Conformity European) requirements, use M12 cordset with shield connected to M12 coupling nut. Trim back and insulate unused wires.

SSI ENCODERS



8-pin M12

Function	8-Pin M12
Ground (GND)	1
+VDC	2
SSI CLK+	3
SSI CLK-	4
SSI DATA+	5
SSI DATA-	6
PRESET	7
DIR	8
Shield	Housing

CANopen ENCODERS



5-pin M12

Function	5-Pin M12
+VDC	2
Ground (GND)	3
CAN _{HIGH}	4
CAN _{LOW}	5
CAN GND / Shield*	1

*M12 connector is connected to encoder housing.

EPC RESERVES THE RIGHT TO UPDATE, REVISE AND AMEND ALL SOFTWARE AND TECHNICAL DATA OR CONTENT AT ANY TIME. EPC SHALL HAVE NO LIABILITY OF ANY KIND OR NATURE FOR ANY TECHNICAL ERRORS OR OMISSIONS IN ANY SOFTWARE OR TECHNICAL DATA. See encoder.com for more information.