

Photon Detector System Performance Testing

Denver Whittington,
Stuart Mufson,
Bruce Howard
Indiana University



August 2, 2016

Charges addressed

1. *Does the Photon Detector System design enable validation and refinement of the DUNE photon detector requirements?*
4. *Does the documentation of the Photon Detector System technical design provide sufficiently comprehensive analysis and justification for the Photon Detector System design adopted?*



Outline

- Light guide designs
- TalBo facility
- Light guide attenuation
- Relative light guide performance
 - Summer 2015, Winter 2016
- Light guide efficiency
 - Data-simulation comparisons
 - Light guide component analysis
- Conclusions and Recommendations

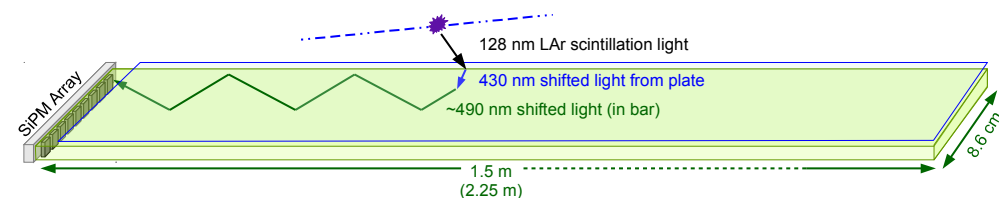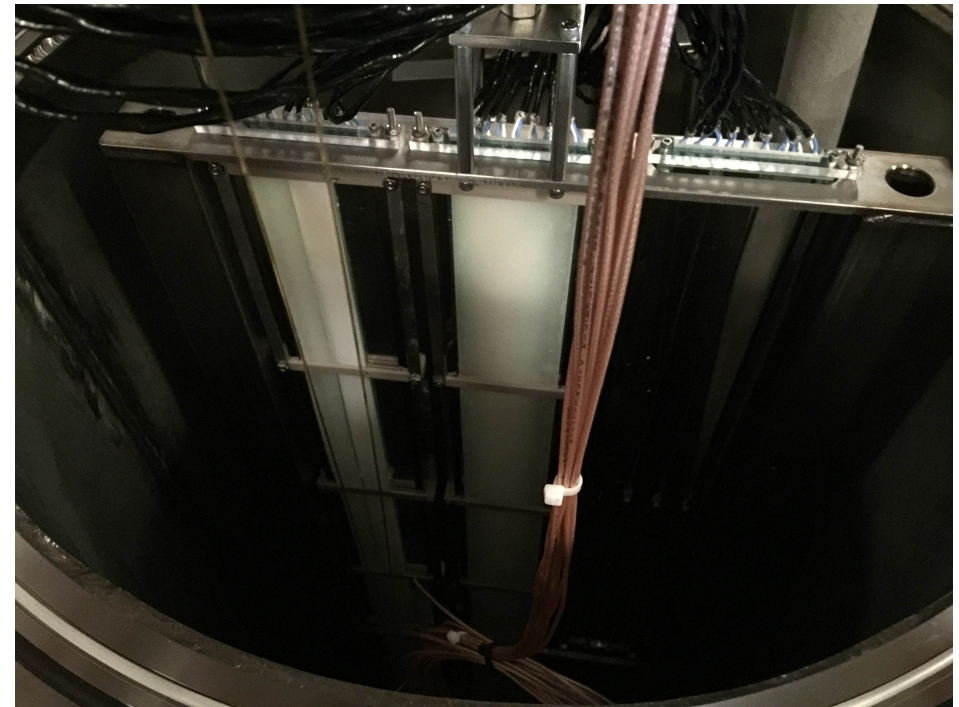

Light Guide Designs

- Shift 128-nm VUV photons into visible wavelengths
- Channel visible signal to readout via total internal reflection
- Maintain good *conversion efficiency* and *attenuation length*
- A variety of designs have been explored.
 - WLS plate + WLS light guide (IU)
 - Dip-coated acrylic light guide (IU/MIT)
 - WLS plate + WLS fibers (CSU)
 - WLS fibers inside coated acrylic panel (LSU)

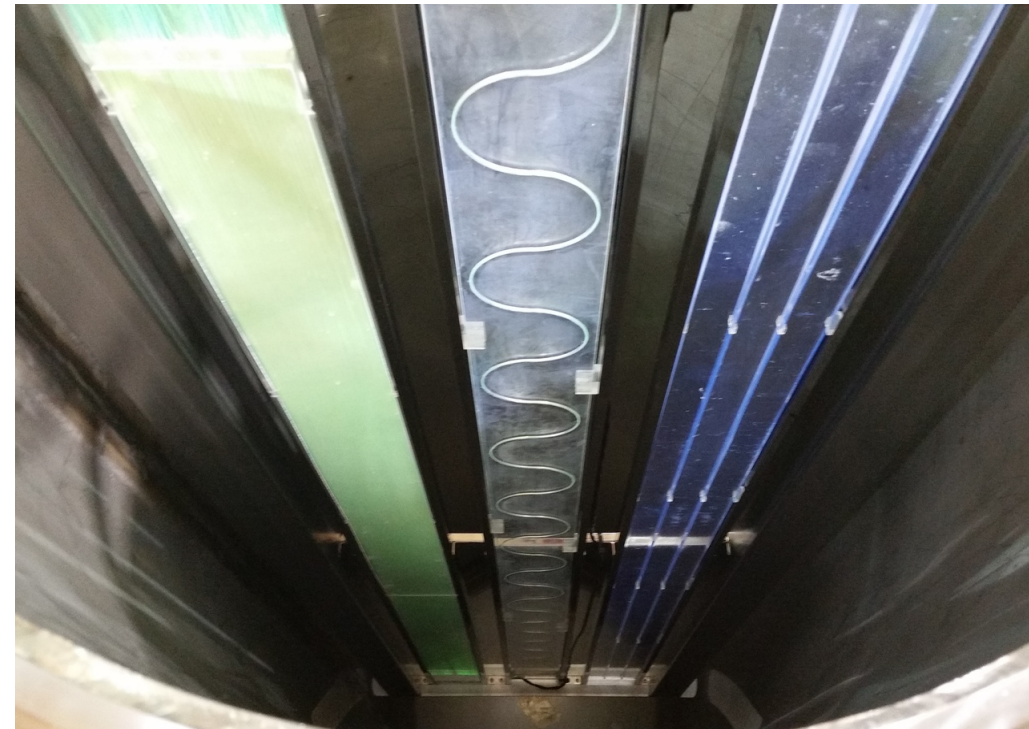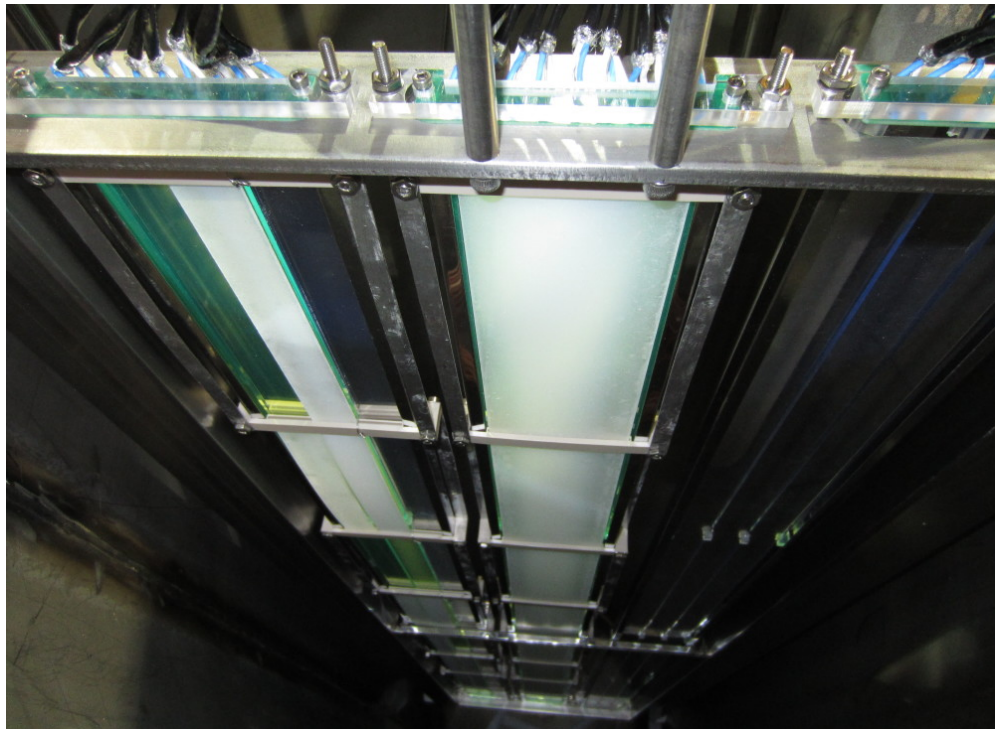


- “TallBo” facility at FNAL
 - 84” LAr dewar
- Ultra-high purity liquid argon
 - Vacuum to remove residual atmosphere
 - Condenser to maintain closed system
 - N₂, O₂, and H₂O monitors
- Space for multiple designs
 - 3 full-width paddles or 12 one-inch light guides
 - Each ~150 cm length
- Hodoscope (cosmic ray) trigger
 - 2 8x8 Arrays of PMTs + BaF₂ crystals
 - CREST cosmic-ray balloon exp't.
 - 2 scintillator paddle planes
 - Allows shower rejection, reconstruction of single tracks




Track Selections


- Three possible hodoscope positions
 - high-high, low-low, high-low
- Require exactly one PMT hit on each hodoscope module
- Exclude tracks crossing from one side of paddles to the other

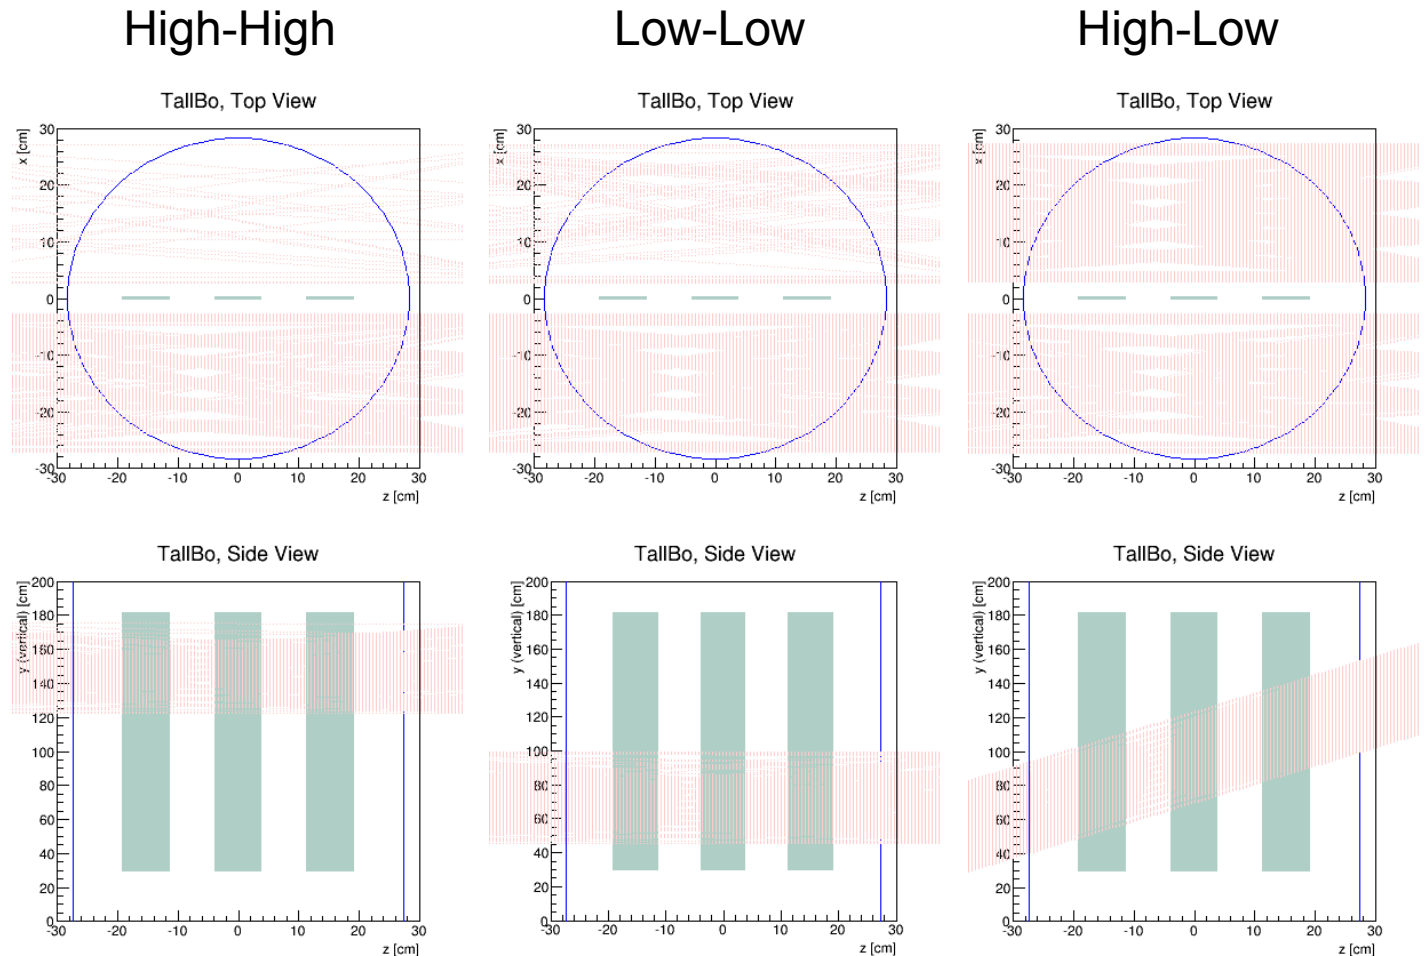



Example cosmic-ray waveform

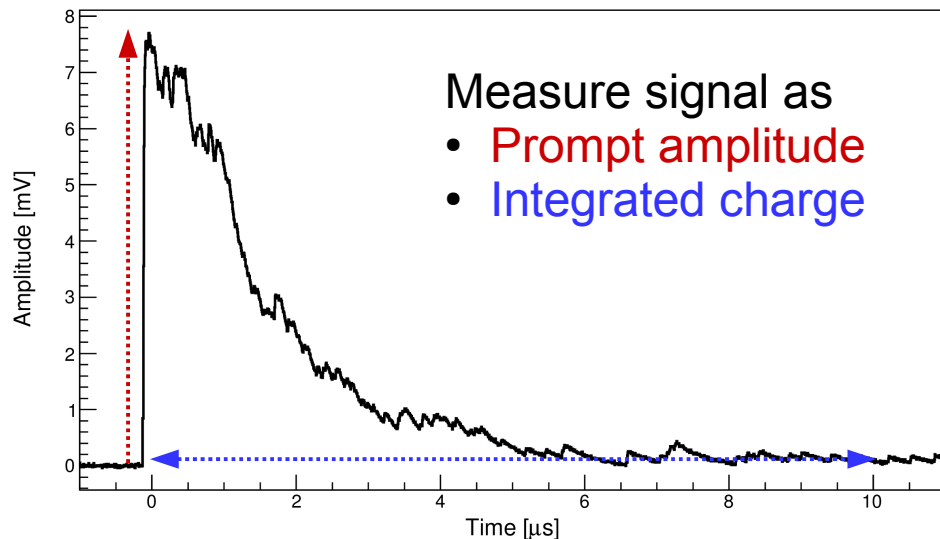


Discrete SiPM signals

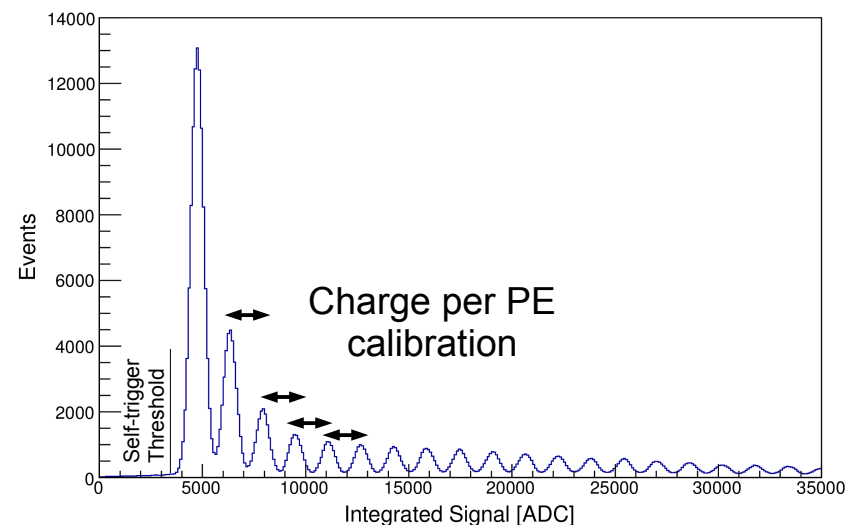




- Example signal distribution
 - Wide WLS light guide + WLS plate
 - High-Low track selection
 - Integrated charge calibrated to PE

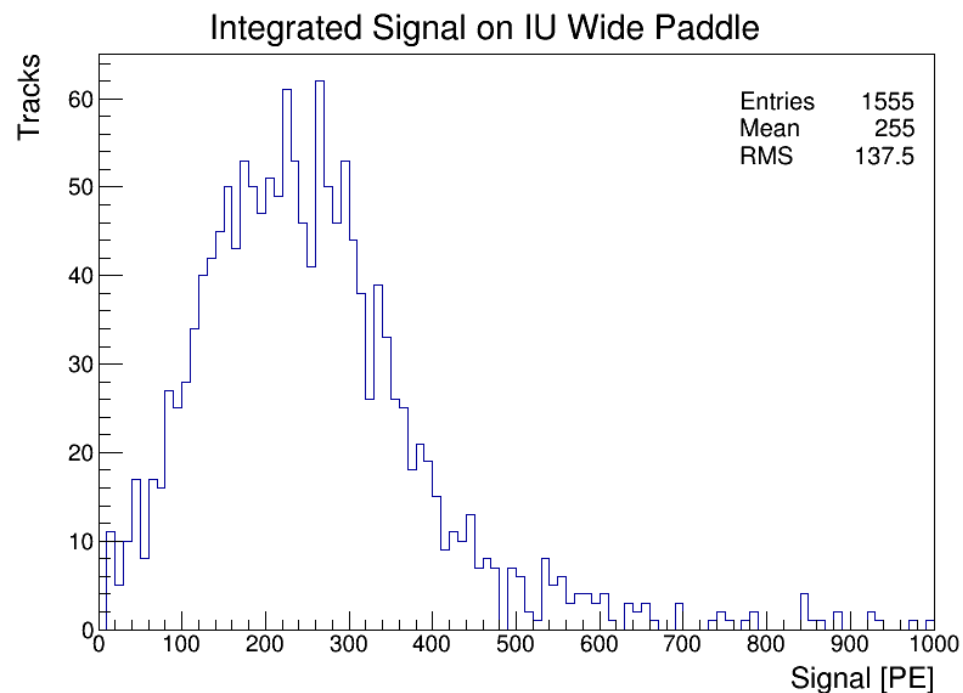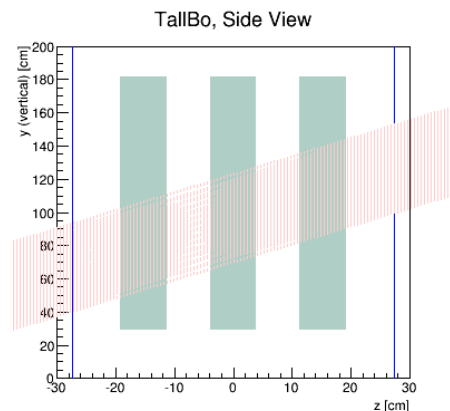

- **Direct measurement**
 - LAr dewar at IU
 - Movable alpha source and plate to illuminate light guide
 - Consistently long attenuation length measurements



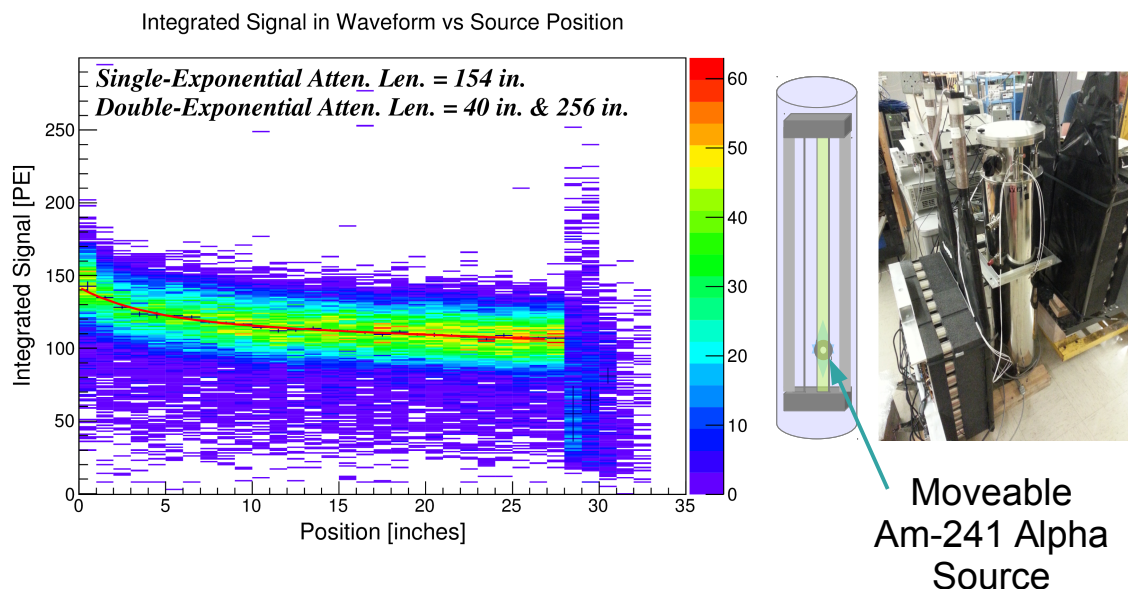


- **Indirect measurement**
 - Comparison of “high-high” and “low-low” tracks at TallBo
 - Reasonable indication of attenuation

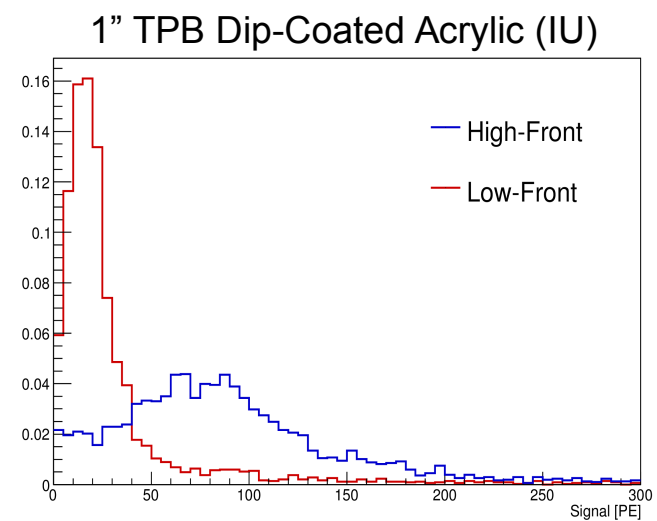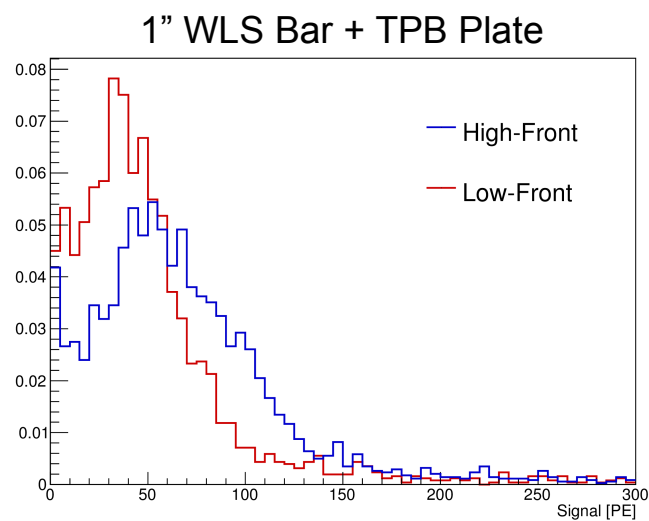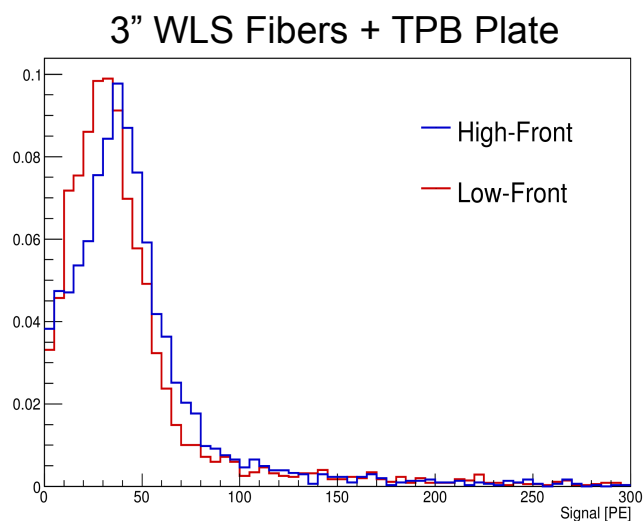




➤ Summer 2015 (TallBo4 Phase 1) – full-width modules

- Y11 fibers + TPB-coated acrylic plate
- Y11 fibers in TPB-coated acrylic pane
- TPB dip-coated acrylic bars x3 (IU recipe)

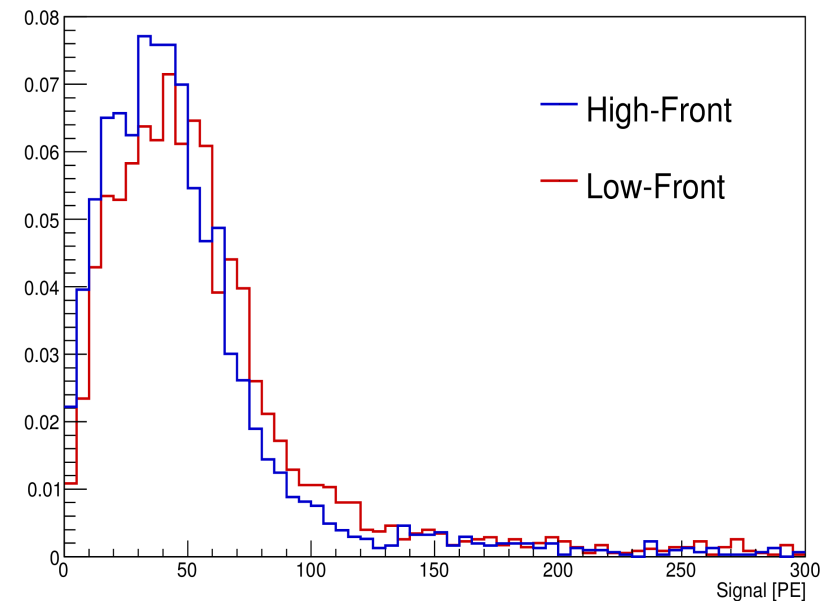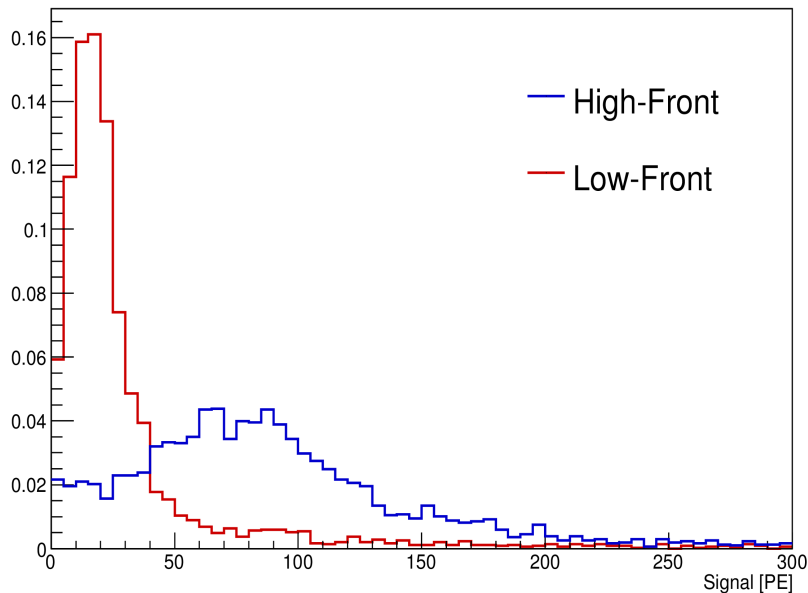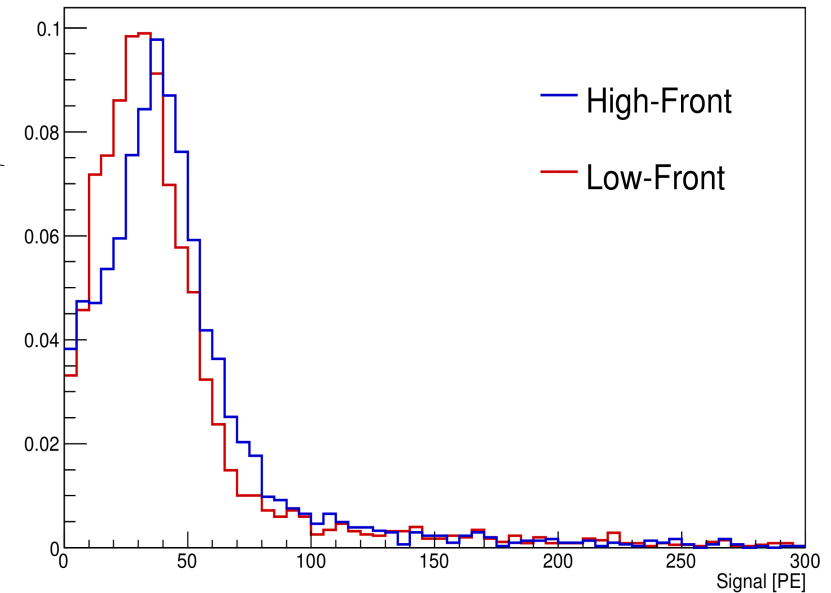

➤ Summer 2015 (TallBo4 Phase 2) – brightest 3 examples (1" wide)


- EJ-280 polyvinyltoluene + TPB-coated acrylic plates
- EJ-280 polystyrene + TPB-coated acrylic plates
- TPB dip-coated acrylic bar (MIT recipe)

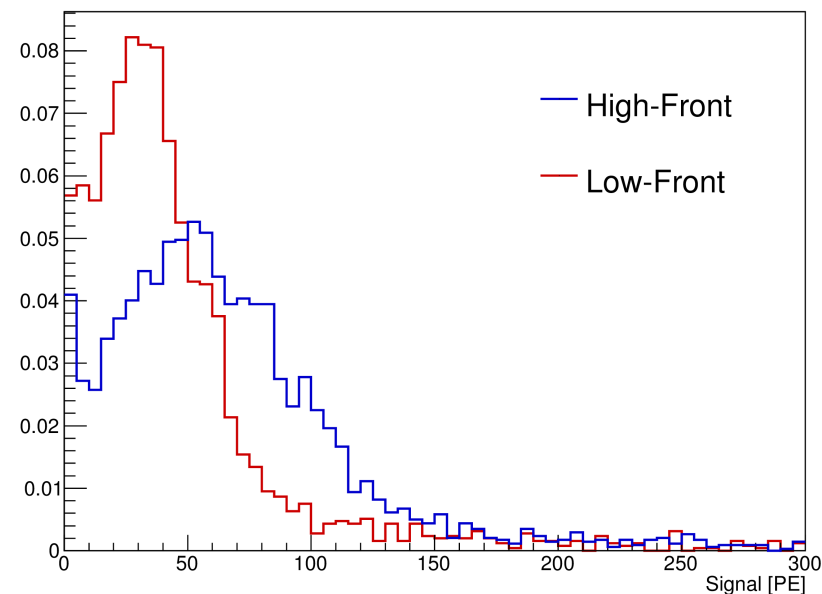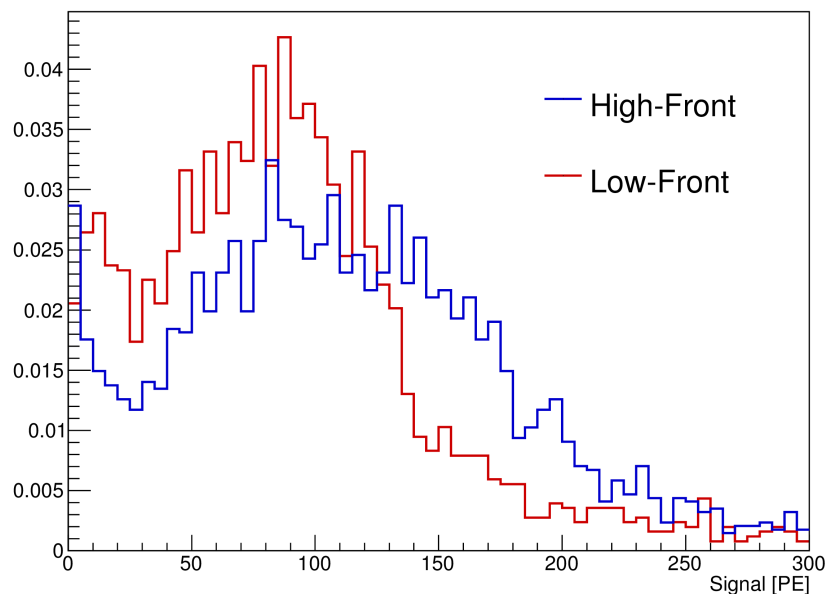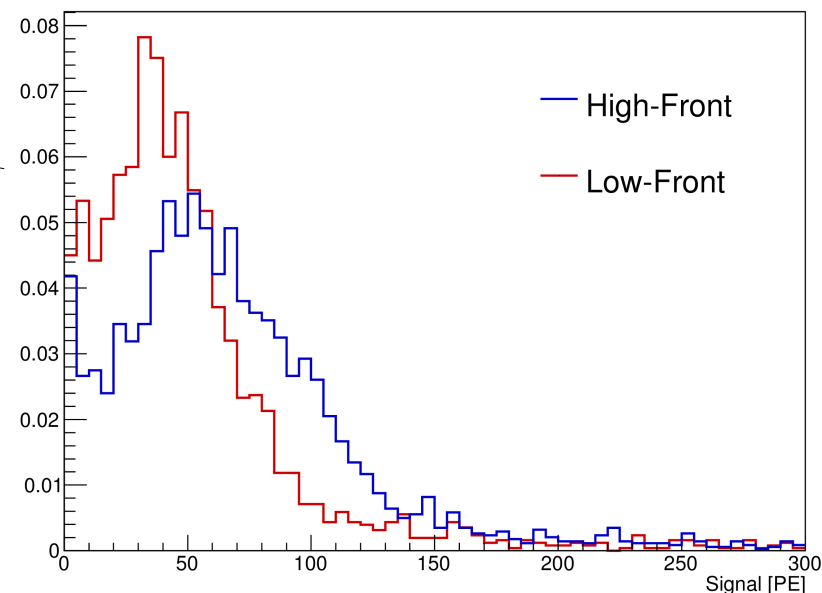


Winter 2016 (TalBo5)

- EJ-280 polystyrene + TPB -coated acrylic plates (wide)
- TPB dip-coated acrylic bar x3 (MIT recipe)
- Combination of 3 1"-wide light guide designs


Integrated Signal on IUWide Paddle

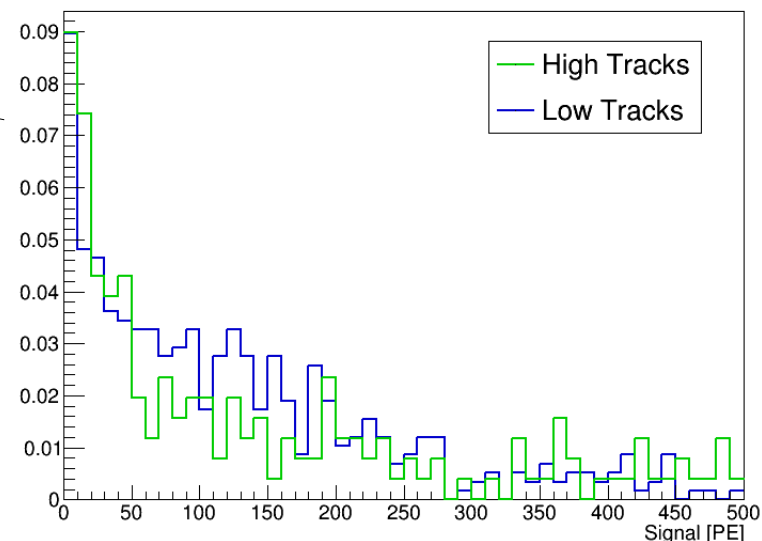



Integrated Signal on IUBars Paddle

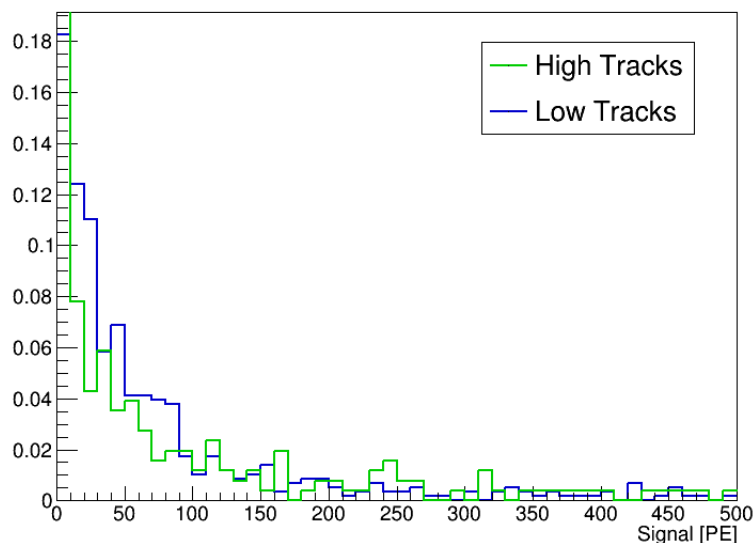

Integrated Signal on MITBars Paddle

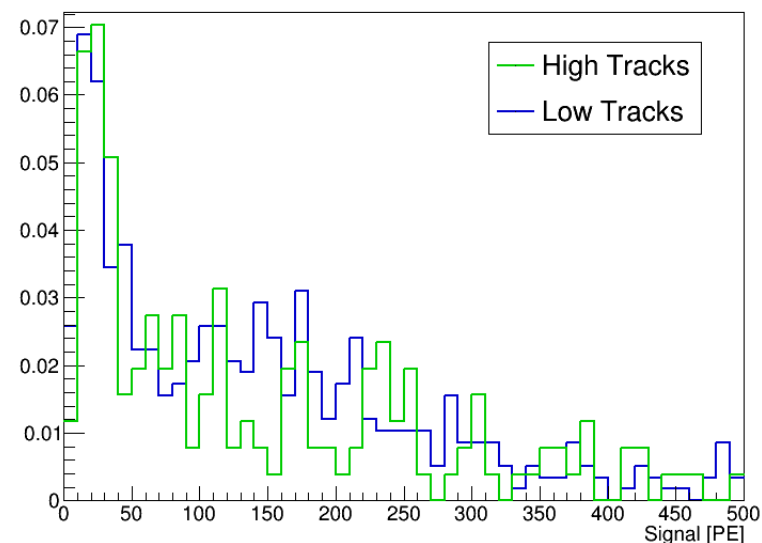

- Winter 2016 (TallBo5)
 - Persistent trigger issues made it difficult to distinguish signal
- Alternative comparison metrics, e.g. correlation between signals on full paddles
 - IU Wide paddle vs All 3 MIT 1" bars
 - Nearly equivalent in relative performance
- Collected more data in “high-low” configuration
 - Steep angle
 - Longer tracks, higher rate
 - Use comparison to simulated tracks to correct for varying track proximity and detector dimensions
 - Focused on IU Wide paddle and best of 3 MIT 1" bars

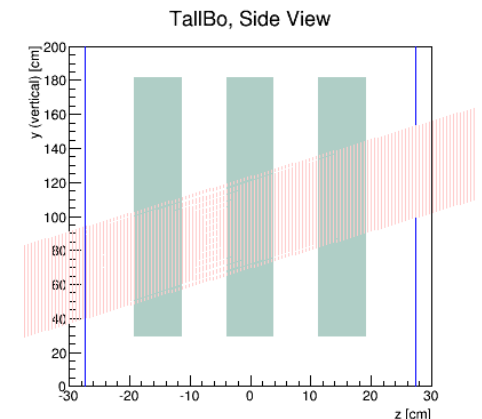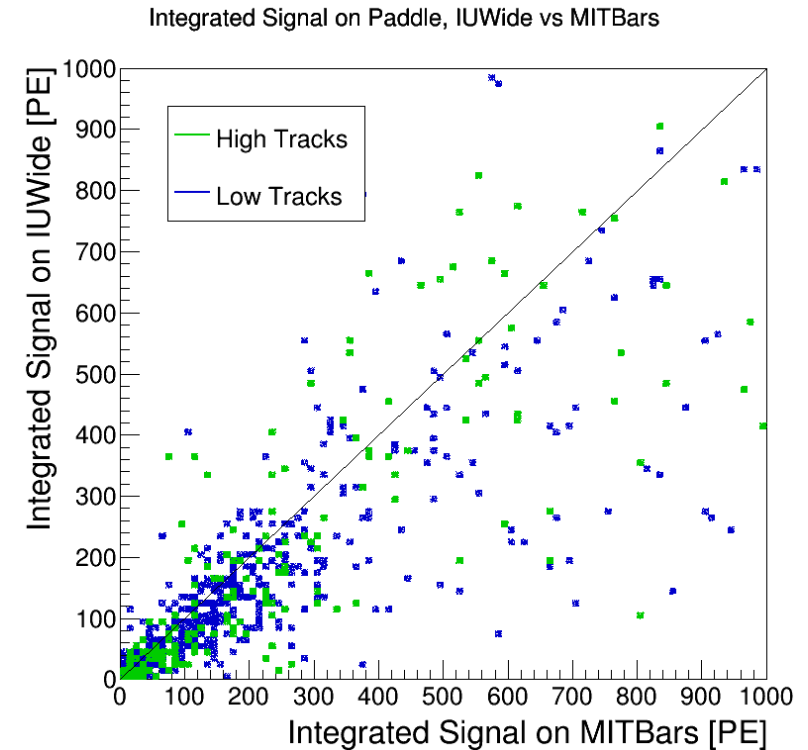

- Ray-tracing ToyMC simulation
 - Developed by J. Lowery (IU undergrad)
 - Light guides modeled as 2D planes at positions in center of dewar
 - Calculates number of photons incident along light guide from each hodoscope track trajectory
 - Includes reflection off of stainless steel dewar walls (25% – Icarus)
 - Assumes MIP value of 40k photons/MeV (84k photons/cm in LAr)

Table 1

Liquid Argon properties.

Liquid phase:	1.00 bar	87.2 K	1.396 g/cm^3
---------------	----------	--------	------------------------

Table 2

Liquid Argon Ionization and Scintillation properties.

Mean energy loss (<i>mip</i>)	$\langle dE_{mip}/dx \rangle = 1.519 \text{ MeV cm}^2/\text{g}$
---------------------------------	---


Photon yield [@ 0-Field] (ideal)	$Y_{ph} = 5.1 \times 10^4 \text{ } \gamma/\text{MeV}$
------------------------------------	---

[@ 0-Field] (<i>mip</i>)	$Y_{ph} \approx 4.0 \times 10^4 \text{ } \gamma/\text{MeV}$
------------------------------	---

[@ 500 V/cm] (<i>mip</i>)	$Y_{ph} \approx 2.4 \times 10^4 \text{ } \gamma/\text{MeV}$
-------------------------------	---

[@ > 15 kV/cm] (<i>mip</i>)	$Y_{ph} \approx 1.3 \times 10^4 \text{ } \gamma/\text{MeV}$
---------------------------------	---

$$N_{photons} = \rho_{LAr} \cdot \left\langle \frac{dE_{mip}}{dx} \right\rangle \cdot Y_{ph} \approx 84821 \text{ photons/cm}$$

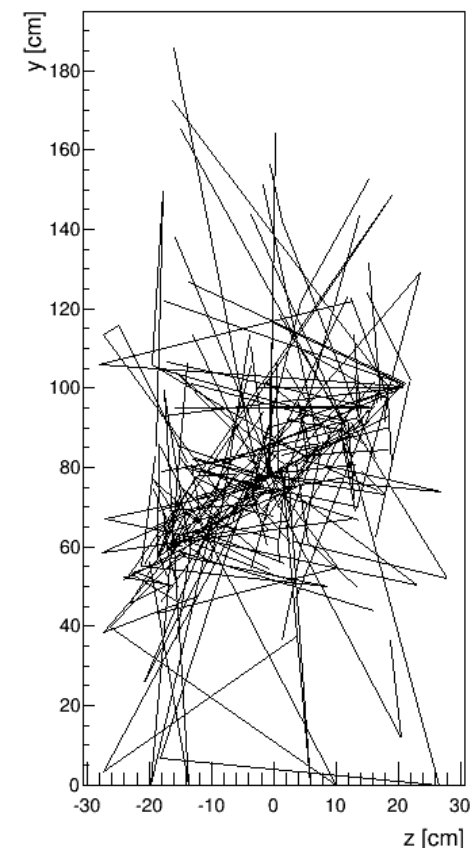



➤ Ray-tracing ToyMC simulation

➤ Data



- Find integrated signal (PE) in 10 μs measured from data to matching simulated track trajectory

➤ Simulation

- Sum total number of incident photons across bar \otimes 2 m attenuation
- *To add:* gaps in plate coverage

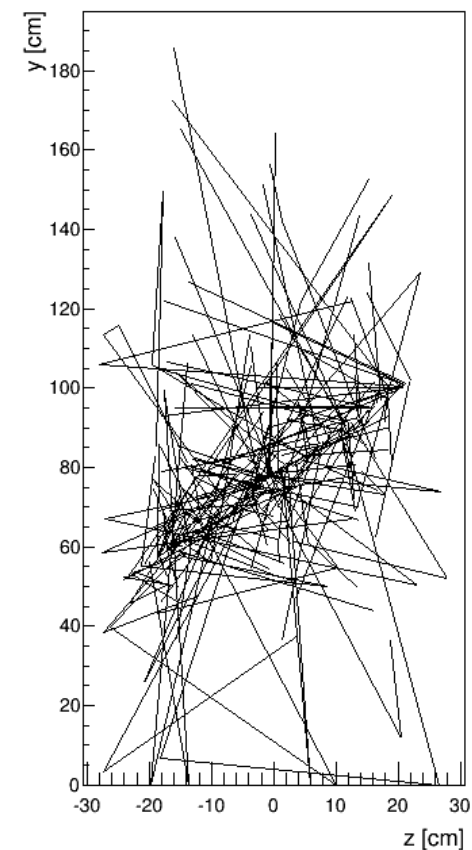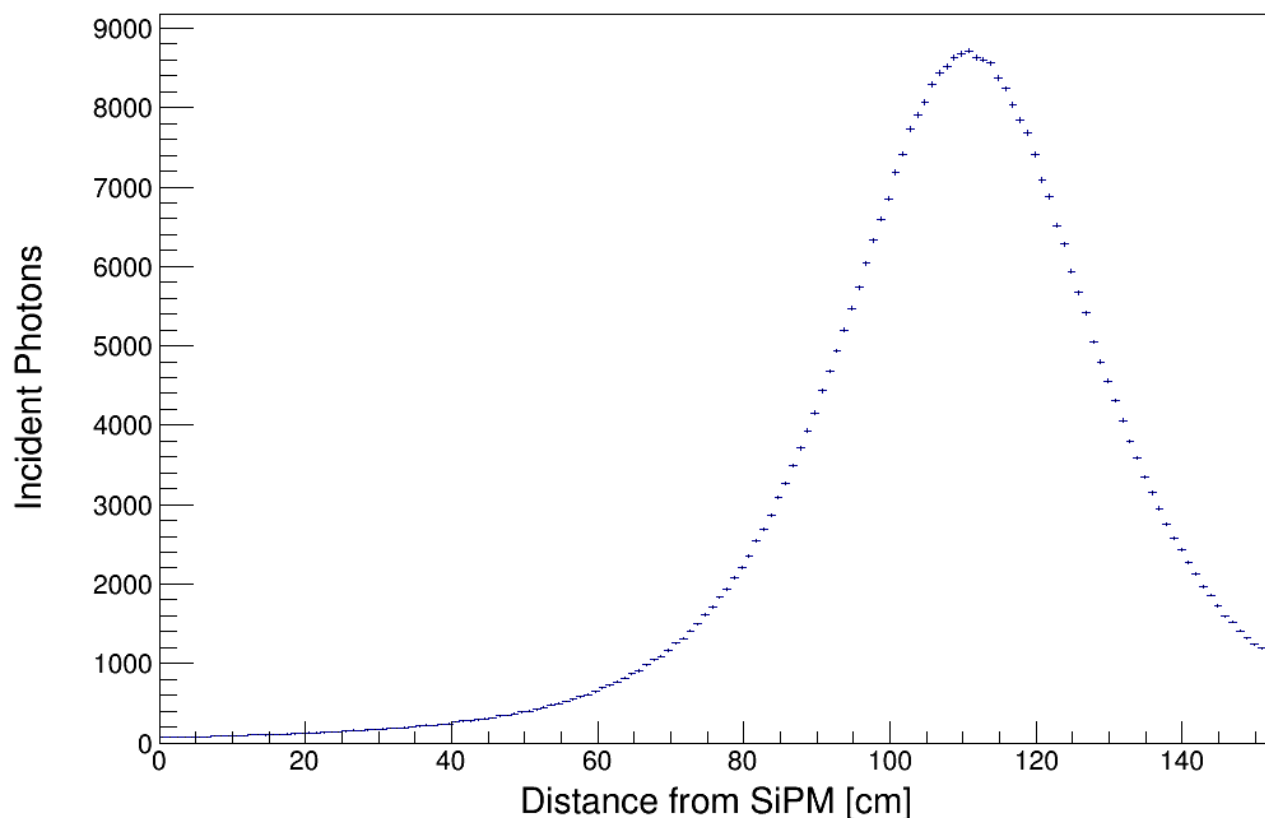

- Calculate fraction of incident photons detected per track event

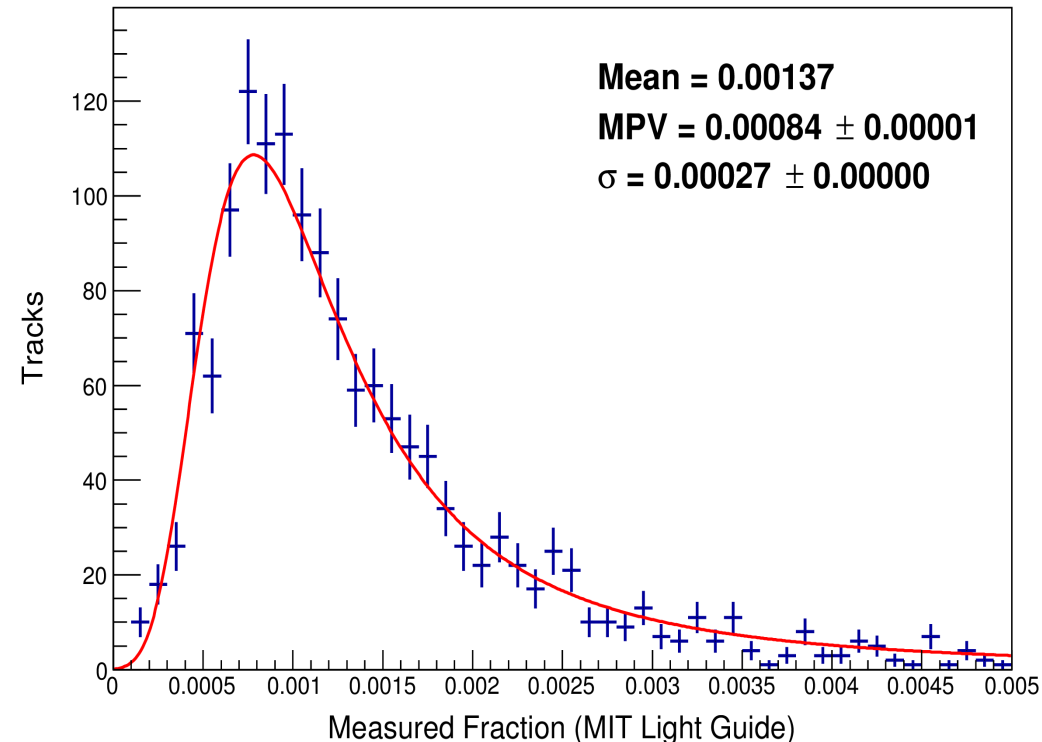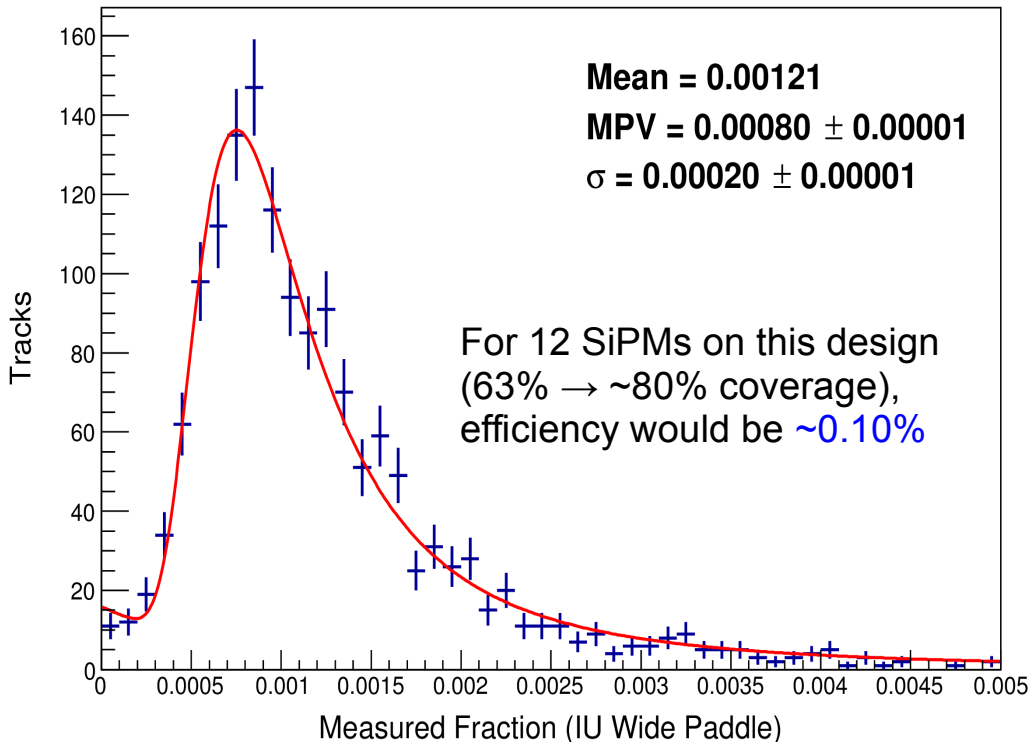


- $$\text{Efficiency} = \frac{\# \text{ Photoelectrons output by SiPM to DAQ}}{\# \text{ VUV photons incident on light guide}}$$



- Landau + exponential fit

- Most probable value measures efficiency to detect MIP scintillation photons
- Denominator simulated with a 2 m attenuation length
- Does not include correction for cross-talk probability (~30%)


- VUV Conversion at TPB Plate
 - VUV photons strike TPB
 - TPB emits VIS (blue) photons
 - VIS (blue) photons strike WLS bar
 - *Measure with VUV Monochromometer*

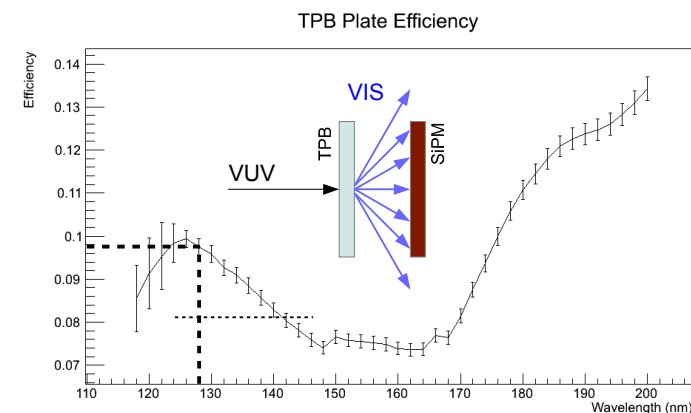

- VIS Transport and Detection
 - WLS emits VIS (green) photons
 - VIS (green) photons propagate via total internal reflection
 - Some photons reach SiPMs and generate signal
 - *Manufacturer Specifications + Simulation*

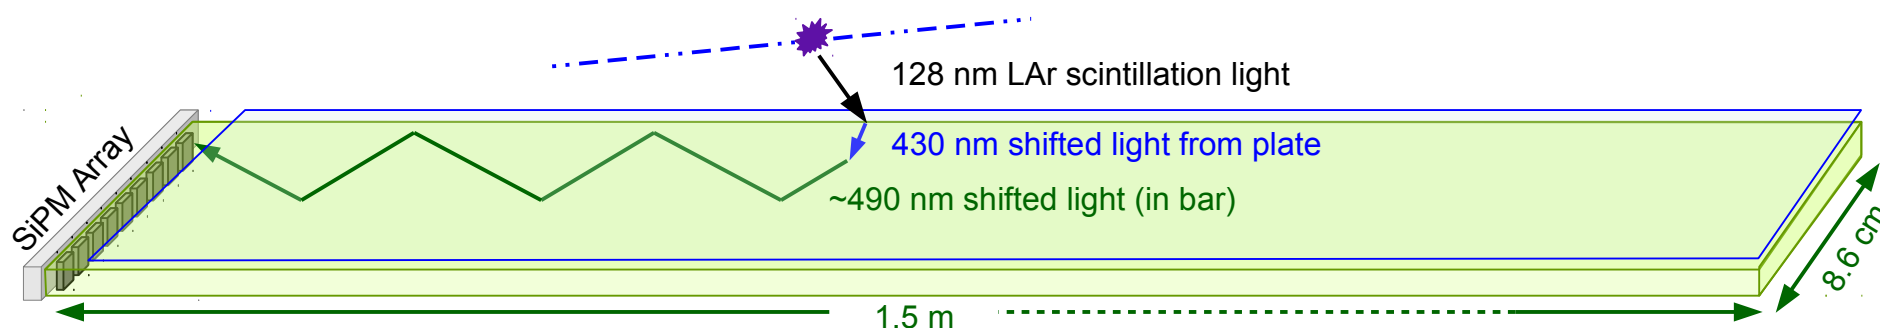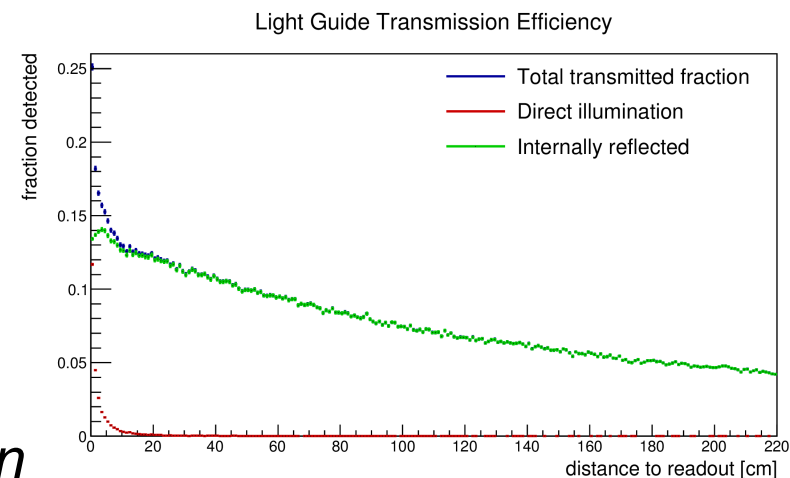

- VUV light converted by TPB
 - Forward conversion efficiency from VUV monochromator – $\sim 10\%$
- VIS light converted within light guide
 - Conversion efficiency – $\sim 44\%$
- Green light transported within light guide
 - Transport efficiency from simulation – $\sim 14\% \times \exp(-x / 2m)$
- Detected by SiPMs
 - Geometric coverage of SiPMs (area) – $\sim 63\%$ 9 SiPMs ($\sim 80\%$ 12 SiPMs)
 - SiPM photon detection efficiency – $\sim 32\%$
- Total expected efficiency (above calculation) **$\sim 0.12\%$** (0.16%)
- Measured efficiency (data from cosmic rays) **$\sim 0.08\%$** (0.10%)

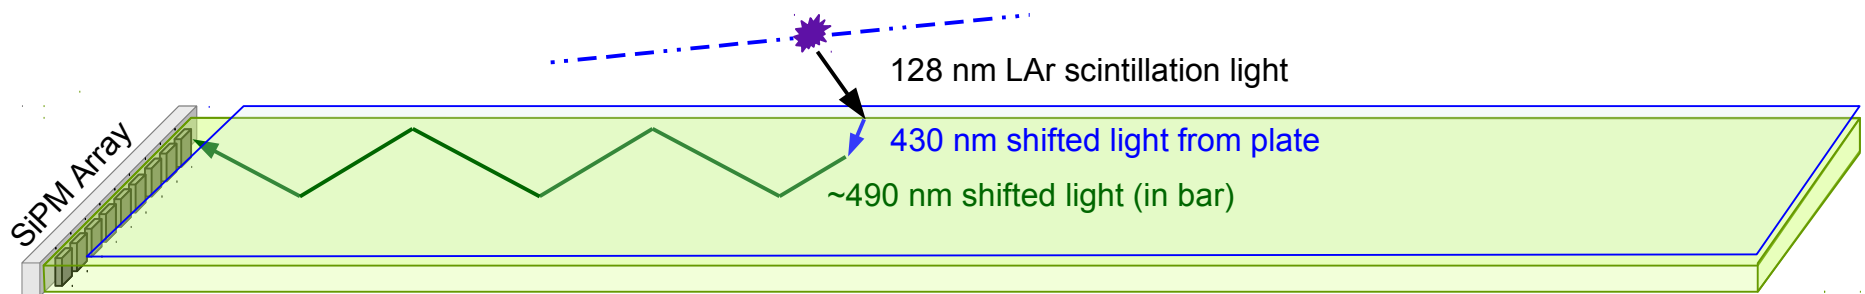

- Target (LArSoft studies) of $\sim 0.3\%$ total efficiency for SNv

➤ *Blanche test facility (PAB)*


- Deploy full-width half-length EJ-280 light guides with optimized plates
- Exercise QA/QC procedures (see S. Mufson's talk)
 - Light guides, TPB-coated plates
- Validate expected efficiency
 - Resolve tension between data/sim comparison and component analysis
 - Vary reflections in simulation, consider Rayleigh scattering
 - Improve component analysis
 - Incorporate correction for SiPM cross talk
- Measure absolute photon yield from MIP cosmic rays
 - Combine light guide component analysis with cosmic ray simulation

➤ *ProtoDUNE-SP*

- Investigate performance of full-scale light guides in-situ
 - (beam events & cosmic rays)
- Quantify variation in light guide performance in TPC
- Employ full larsoft simulation → more robust efficiency estimates

Value Engineering

- Continued work to improve TPB (or bis-MSB) **plate design**
 - Expect improvement by **factor of 2** with QC (see talk by S. Mufson)
- Continued work to improve **dipping methods** (see talk by M. Toups)
- Explore **alternative wavelength shifters**
 - There may be a better doped light guide match to TPB and/or SiPM
 - Current EJ-280 design is best match for a catalog product to the TPB emission, reasonably well matched emission to SiPM, available on schedule
- Consider painting **inactive sides** of light guides w/ reflector
 - Could increase internal reflection trapping by $\sim 45\%$
- Explore **double-ended** light guide readout
- Increase **number of light guides** per APA

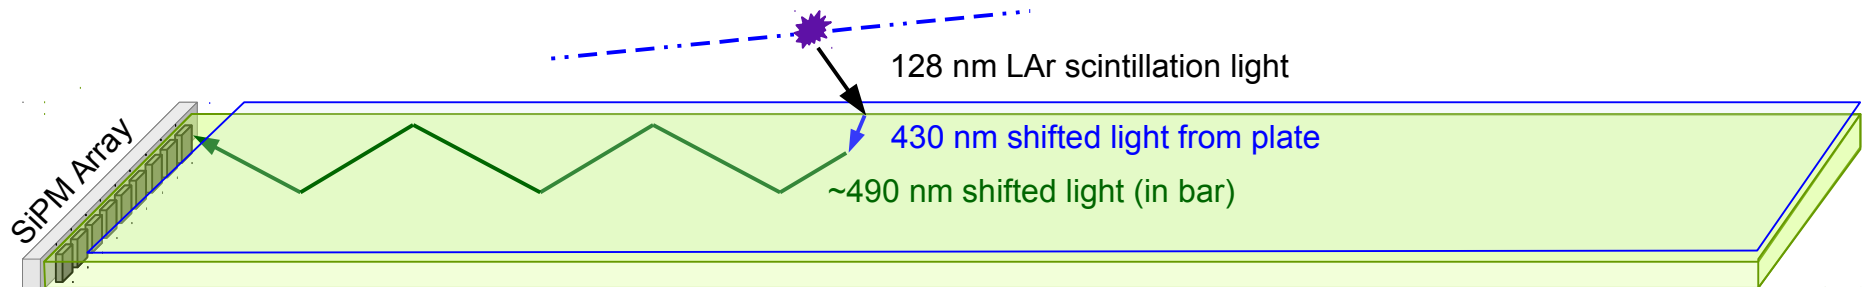


1. *Does the PDS design enable validation and refinement of the DUNE PD requirements?*
 YES – The current PD designs will provide ample sensitivity for the ProtoDUNE measurement program.
4. *Does the documentation of the PDS technical design provide sufficiently comprehensive analysis and justification for the Photon Detector System design adopted?*
 YES – The PD design testing program has enabled measurement and optimization of PD performance.

- Tests at TallBo have refined PD options to the current designs
 - Iteration and improvement on designs, comparison tests of novel ideas
 - WLS bar +TPB plate (IU) and dip-coated acrylic (MIT) designs *quite comparable*
 - Relative brightness similar, attenuation length appears long
 - *Absolute efficiency* estimated from data/simulation comparison (TallBo5)
 - Expect **0.10%** efficiency (photons detected / incident) with 12 SiPMs on TPB Plate + WLS Bar design from data-simulation comparison
 - Expect **0.16%** efficiency from light guide component analysis
- Current designs *meet requirements for ProtoDUNE*
 - Will robustly inform further refinement needs toward preliminary final design for DUNE single-phase far detector
 - Project that *improved radiators* should approach DUNE LE/SN_v requirements
- *More details*
 - TallBo4, Summer 2015 (DUNE DocDB 138, JINST 11 C05019)
 - TallBo5, Winter 2016 (Presentation from May CSU Workshop)


Backup

Light Guide Principles


- Shift 128-nm VUV photons into visible wavelengths
- Channel visible signal to readout via total internal reflection

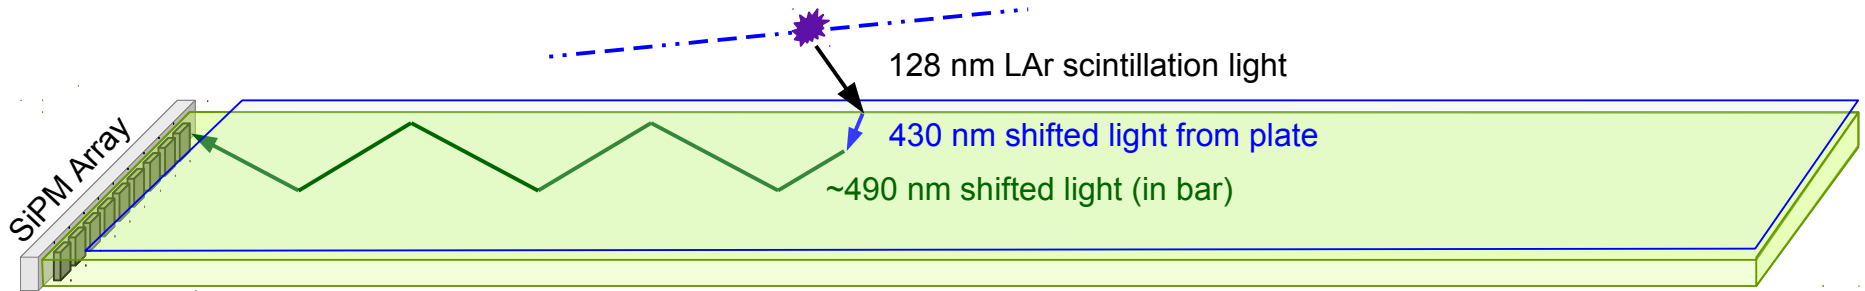

TPB Emission and EJ-280 Absorption

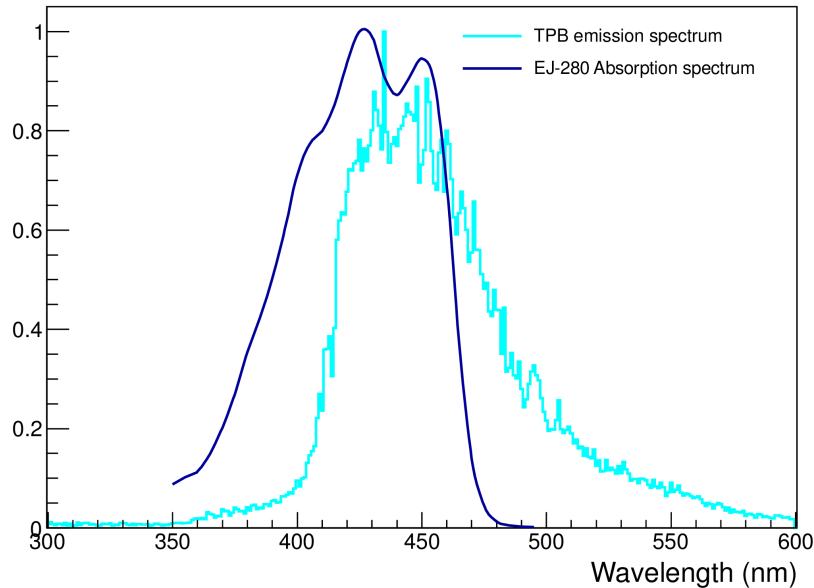


Eljen EJ-280 Emission and SiPM PDE

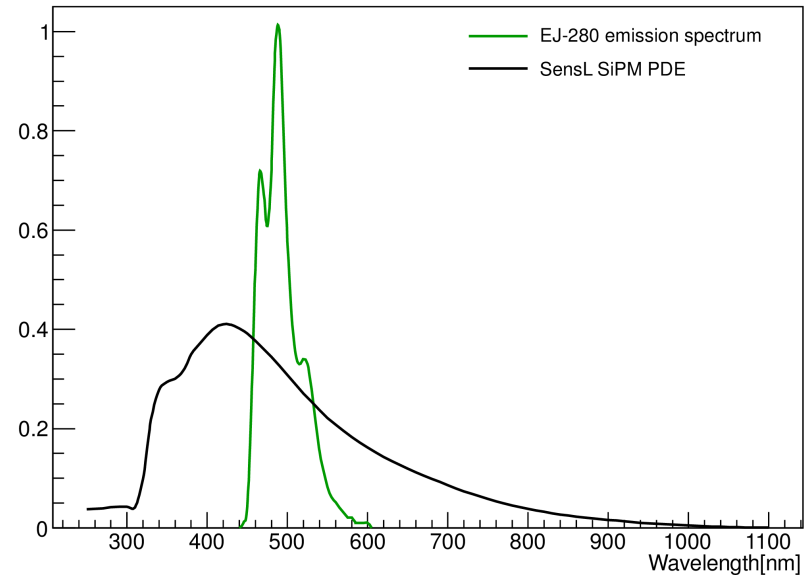


- Winter 2016 (TalBo5)
 - Persistent trigger issues made it difficult to distinguish signal
 - Alternative comparison metrics
 - Signal detected on bar (or group of 3 SiPMs) / Total across all SiPMs


Adjusted Fraction of IUWide Signal on Group 0

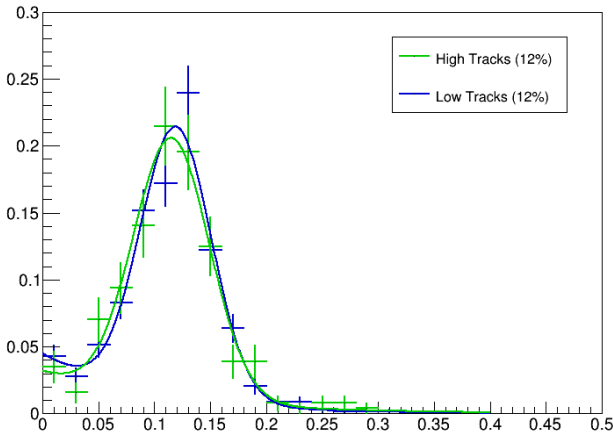


Adjusted Fraction of IUWide Signal on Group 1

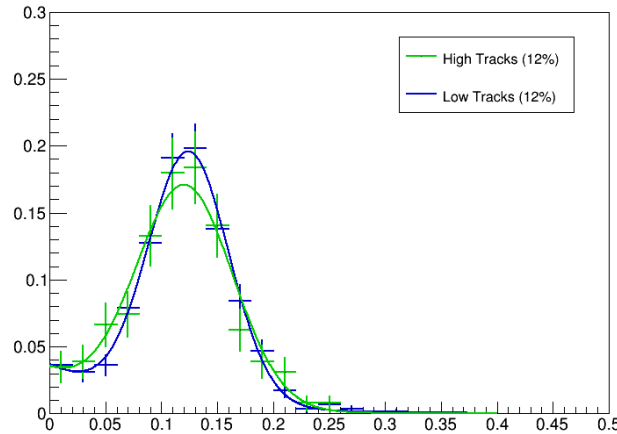


Adjusted Fraction of IUWide Signal on Group 2

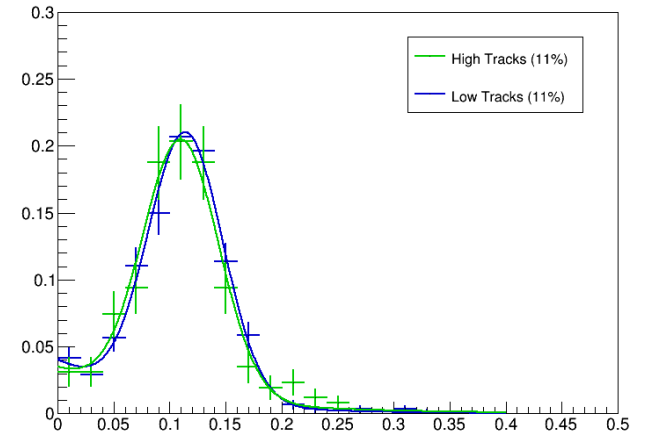


Adjusted Fraction of MITBars Signal on Bar 0

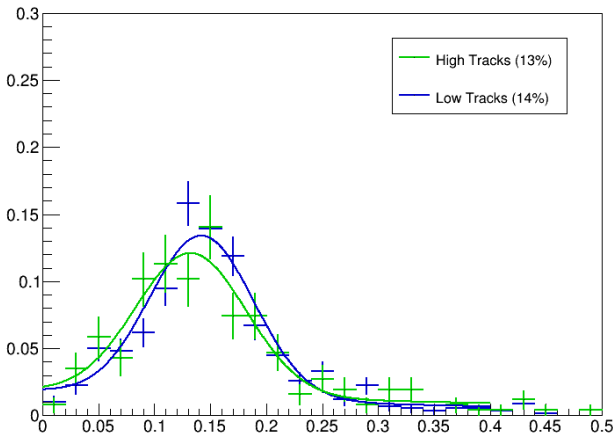

Adjusted Fraction of MITBars Signal on Bar 1

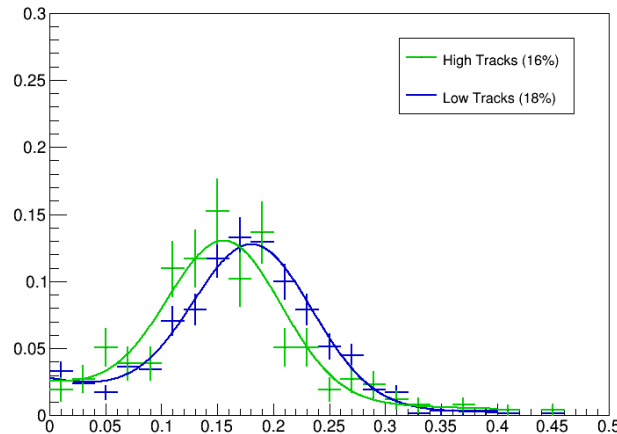


Adjusted Fraction of MITBars Signal on Bar 2

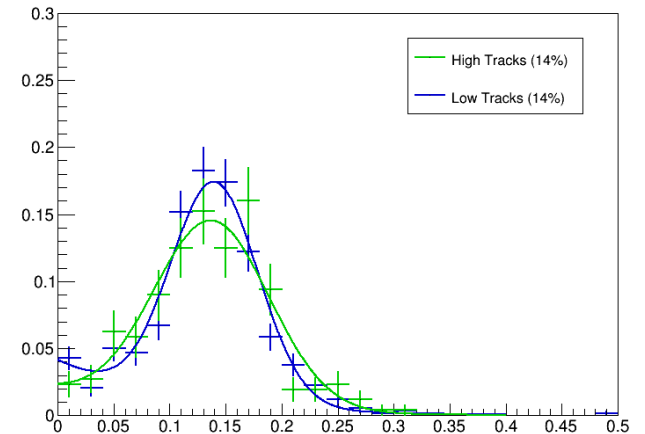

- Example VUV forward conversion efficiency
 - VIS photons at SiPM / VUV photons incident on TPB sample
 - Not corrected for SiPM solid angle (but SiPM is close to VUV spot)


TPB Plate Efficiency

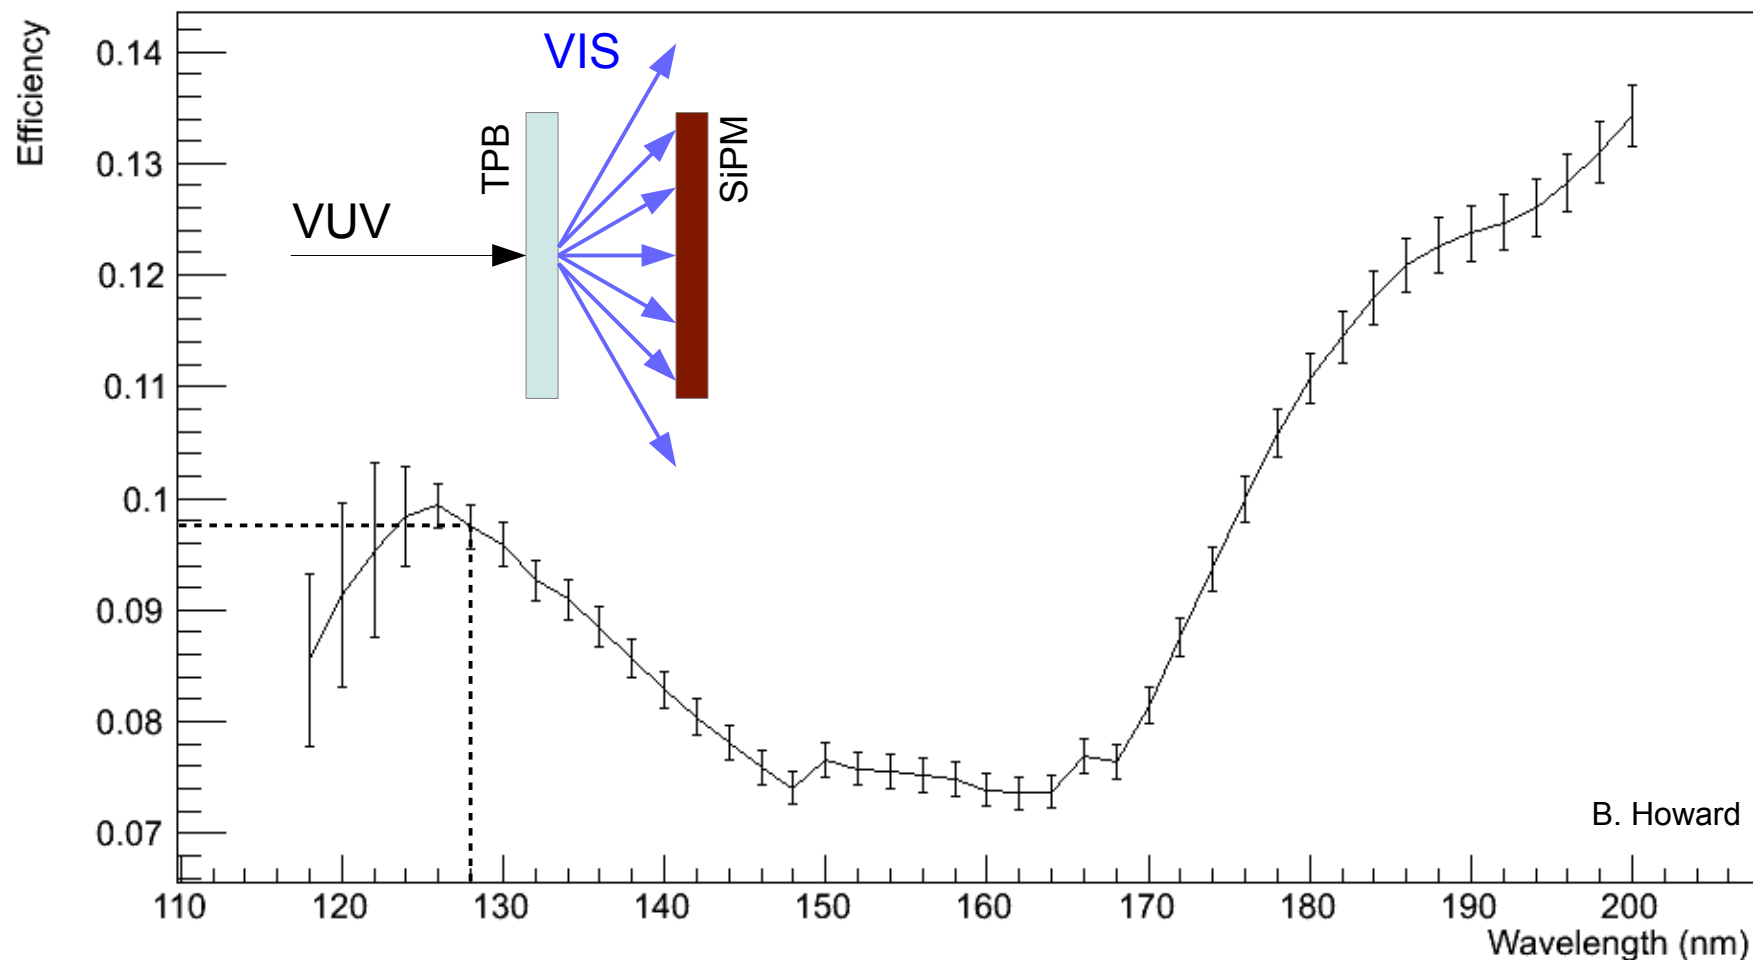

➤ TPB Emission vs EJ-280 Absorption

- ~ 44% of TPB emission incident on light guide is wavelength-shifted to green


TPB Emission and EJ-280 Absorption

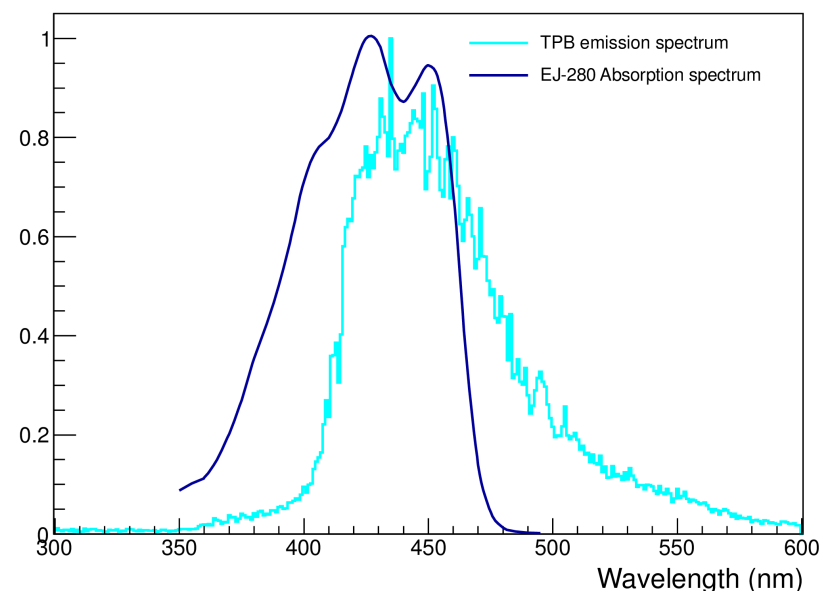

➤ EJ-280 Emission vs sensL 60035-SMT PDE

- EJ-280 output is close to maximum SiPM eff.
- ~ 32% of light from the EJ-280 reaching the SiPM is registered as signal

Eljen EJ-280 Emission and SiPM PDE

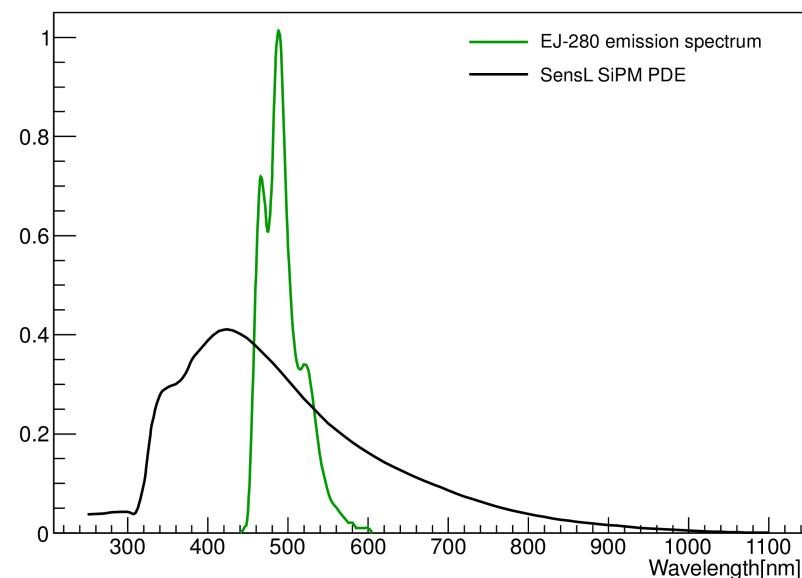

- Ray-tracing simulation of light guide
 - WLS photon emitted inside EJ-280 light guide
 - Propagate (via internal reflection) until lost or arrives at readout end
 - Assume 1% loss probability at light guide surfaces
 - “attenuation” length of ~2 m

Light Guide Transmission Efficiency

