

The DUNE Near Detector Complex

Alan Bross

Physics Opportunities in the Near DUNE Detector Hall

December 3rd, 2018

Outline

- Motivation and overview of the baseline facility
- Flux, event rates and beam systematics
- Physics program (Chris Marshall)
- Brief introduction to the DUNE Near detectors
 - LAr (James Sinclair)
 - Multi-purpose Detector (MPD) (Tanaz Mohayai)
 - 3DST (Clark McGrew)
 - DUNE-PRISM (Christovao Vilela)
- Near detector hall
- Conclusions and outlook

Details in the talks that follow


Why do we need near detector(s)

Primary purpose


The significance with which CP violation, defined as δ_{CP} not equal to zero or π , as a function of exposure in kt-MW-years, for equal running in FHC and RHC mode. True normal ordering is assumed. The width of the band corresponds to the difference in sensitivity between ν_e signal normalization uncertainty of 1% and 3% with 5% uncertainty on the ν_μ disappearance mode.

+ many topics on physics beyond ν SM (I think that is why we are here)

CP Violation Sensitivity

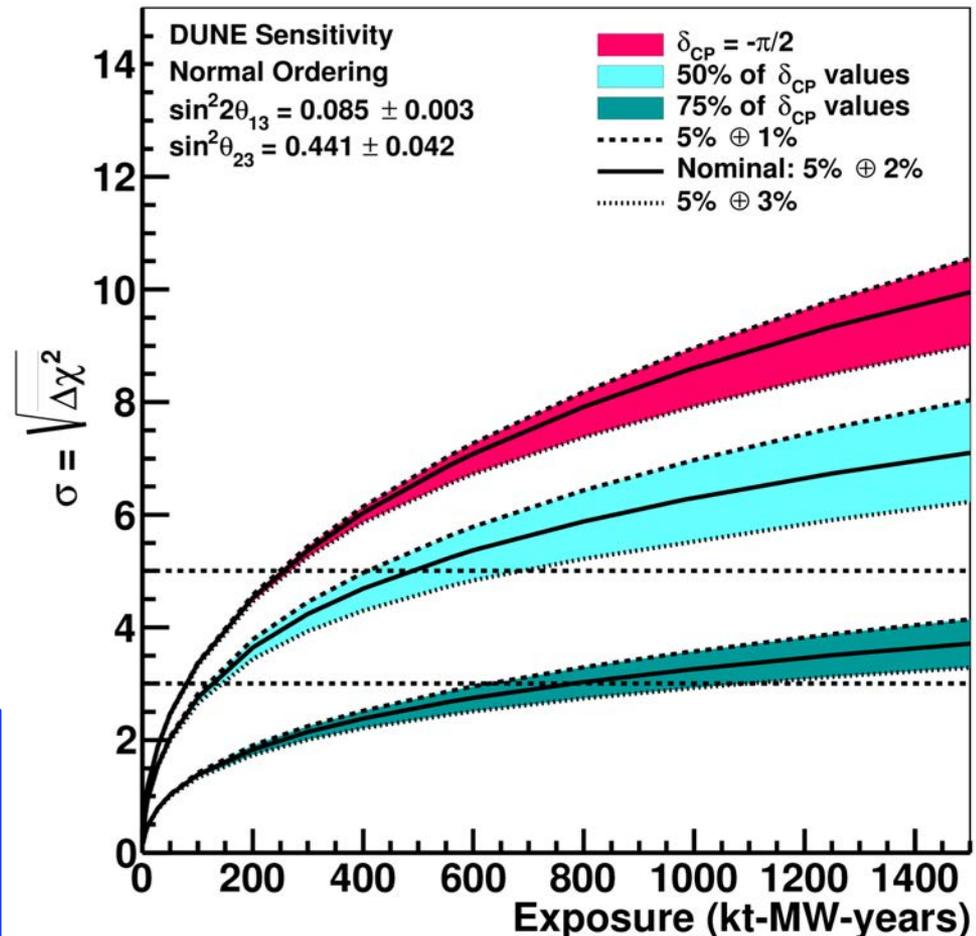


Facility: Bird's-Eye View

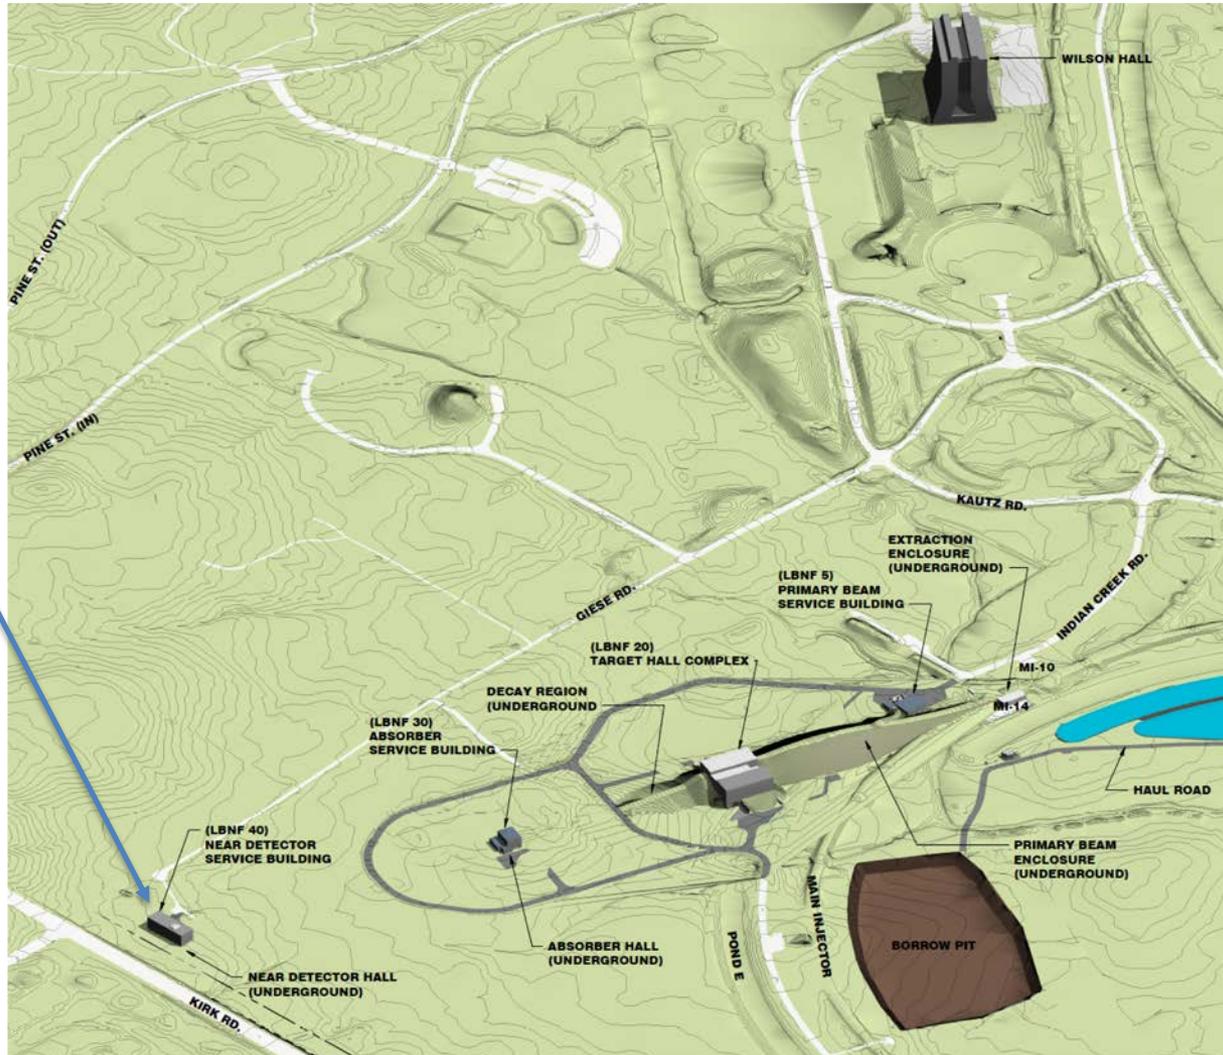


You are here

Looking underground

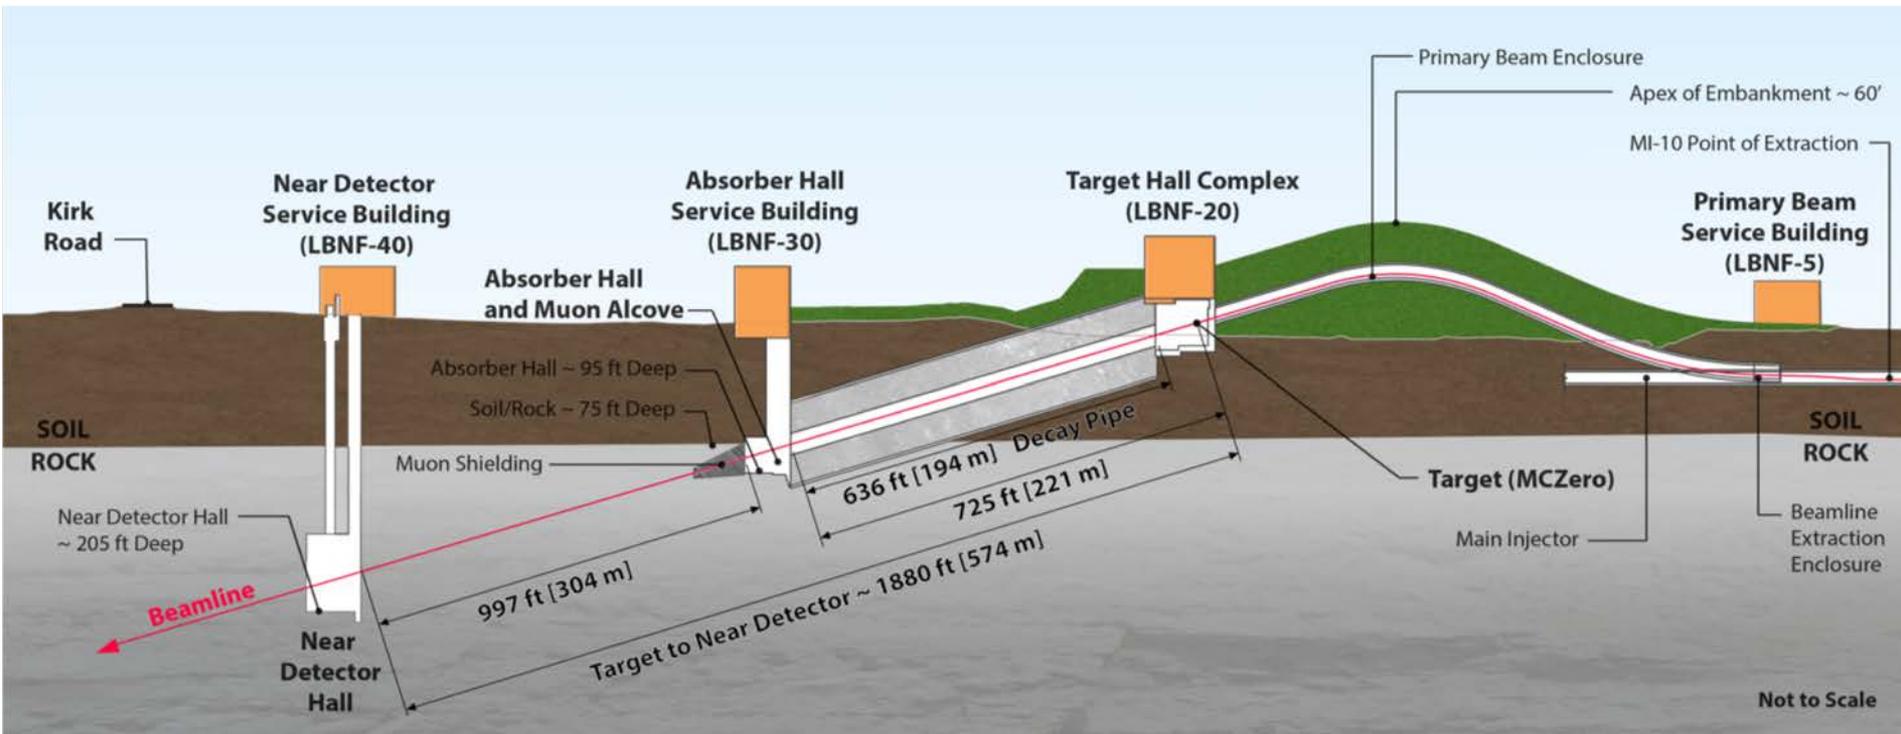


Service building: Reference design

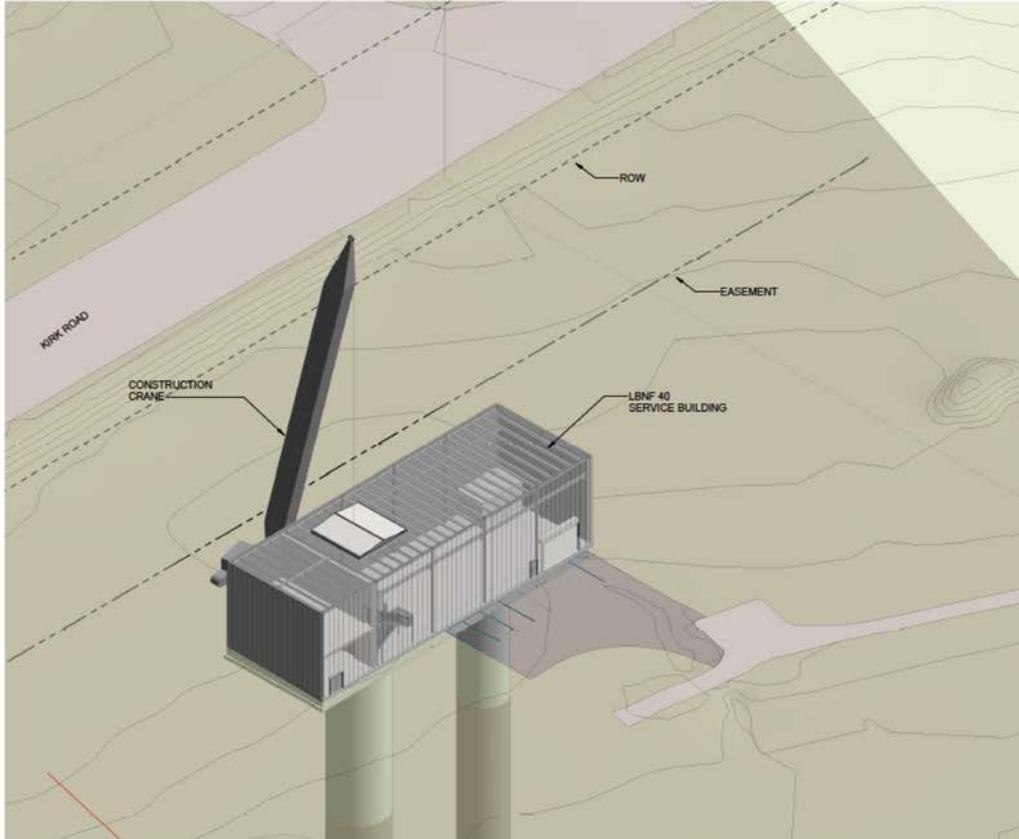

3D PRESENTATION AT GRADE LEVEL

SCALE:

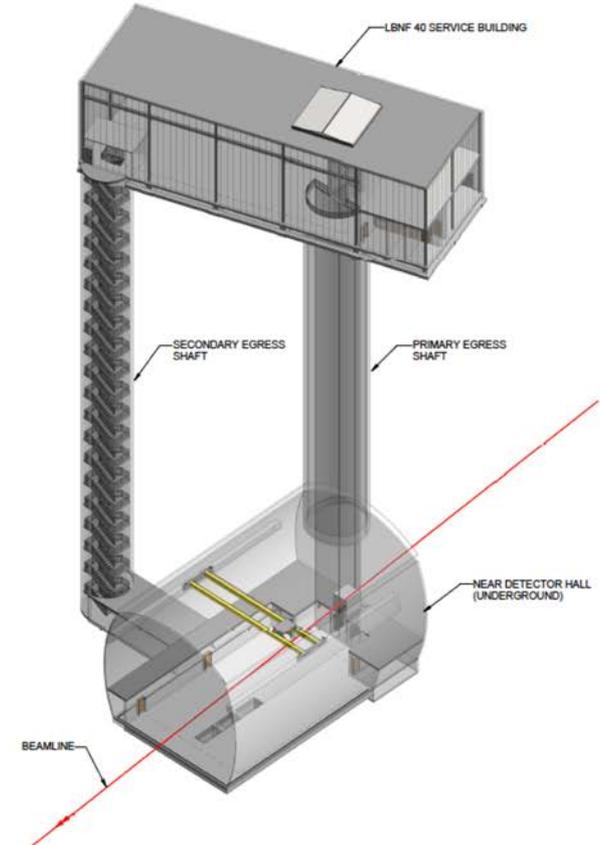


3D PRESENTATION

SCALE:

Flux, event rates @ ND570


Optimized CPV tune

FHC, Events/ton_Ar-year

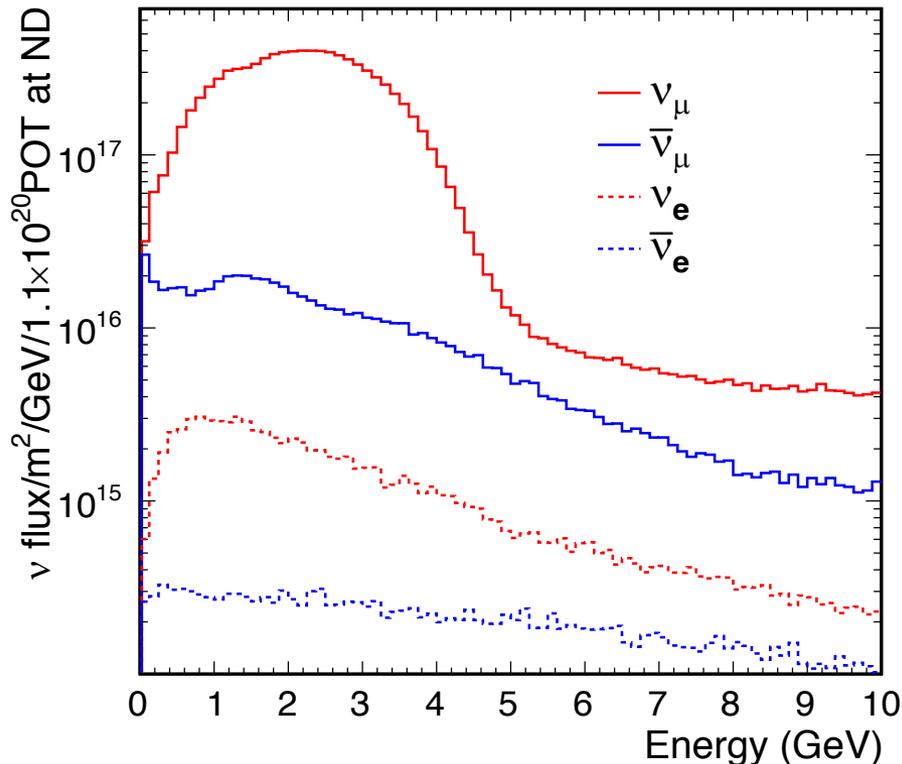


Event class	Number of events per ton-year
ν_μ CC Total	1.64×10^6
ν_μ NC Total	5.17×10^5
ν_μ CC Coherent	8.35×10^3
ν_μ NC Coherent	4.8×10^3
ν_μ - electron elastic	135
ν_μ CC π^0 inclusive	4.47×10^5
ν_μ NC π^0 inclusive	1.96×10^5
ν_μ Low ν (250 MeV)	2.16×10^5
ν_μ Low ν (100 MeV)	7.93×10^4
$\bar{\nu}_\mu$ CC Coherent ($\bar{\nu}$ mode)	6.90×10^3
ν_e CC Total	1.89×10^4
ν_e NC Total	5.98×10^3
ν_e CC Coherent	93
ν_e NC Coherent	52


Beam systematics

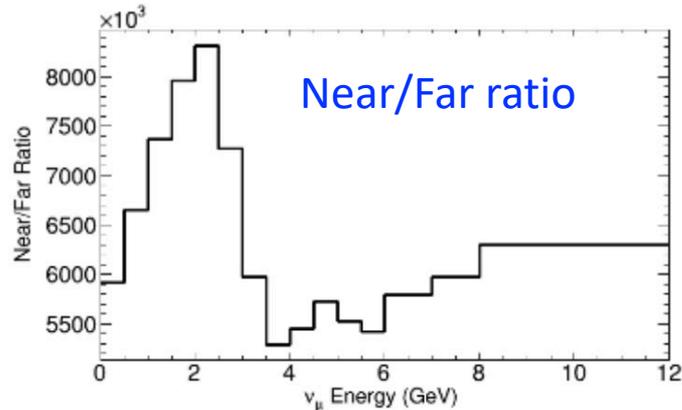

Flux uncertainty at ND

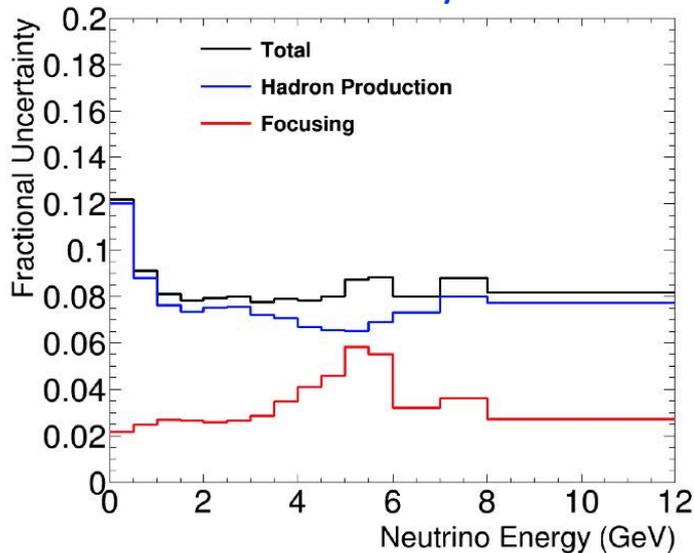

Near/Far ratio uncertainty

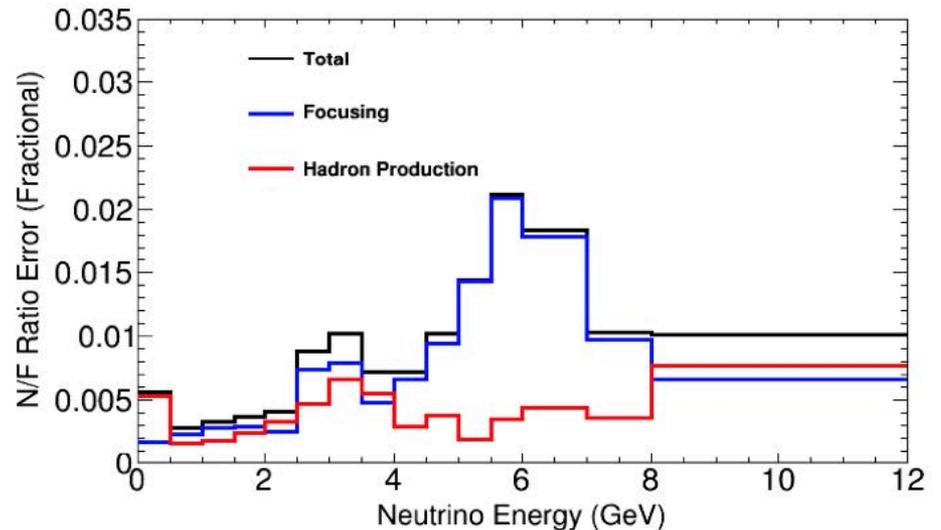

Beam systematics II: Instrumentation

- Work continues on understanding beam
- Hadron production measurements
 - Flux spectrometer
 - Exact mock up of LBNF target horn system with multiparticle spectrometer, PID, etc.
 - EMPAHTIC
 - Uses the FNAL Test Beam Facility (FTBF), either MTest or Mcenter
- Beam line instrumentation
 - Muon monitors
 - Conventional
 - Diamond
 - Muon total absorption
 - Transition radiation detector
 - RF-based hadron monitor

Measuring the # of events, near & far

- Oscillation probabilities

$$P_{\nu_{\mu} \rightarrow \nu_e}(E_{\nu}) = \frac{\phi_{\nu_e}^{far}(E_{\nu})}{\phi_{\nu_{\mu}}^{far, no-osc}(E_{\nu})} = \frac{\phi_{\nu_e}^{far}(E_{\nu})}{\phi_{\nu_{\mu}}^{near}(E_{\nu}) * F_{far/near}(E_{\nu})}$$

- Number of events/energy spectrum

$$\frac{dN_{\nu}^{det}}{dE_{\nu}} = \phi_{\nu_{\mu}}^{det}(E_{\nu}) * \sigma_{\nu_{\mu}}^{Ar}(E_{\nu})$$

- In reality

$$\frac{dN_{\nu}^{det}}{dE_{rec}} = \int \phi_{\nu_{\mu}}^{det}(E_{\nu}) * \sigma_{\nu}^{target}(E_{\nu}) * T_{\nu_{\mu}}^{det}(E_{\nu}, E_{rec}) dE_{\nu}$$

- Folding of detector effects
 - Prevents (easy) cancellations of many systematic effects
 - Needs unfolding

Details


- Oscillation signal

$$\frac{\frac{dN_{\nu_e}^{far}}{dE_\nu}}{\frac{dN_{\nu_\mu}^{near}}{dE_\nu}} = P_{\nu_\mu \rightarrow \nu_e}(E_\nu) * \frac{\sigma_{\nu_e}^{Ar}(E_\nu)}{\sigma_{\nu_\mu}^{Ar}(E_\nu)} * F_{far/near}(E_\nu)$$

- Near muon/electron ratio

$$\frac{\frac{dN_{\nu_e}^{near}}{dE_\nu}}{\frac{dN_{\nu_\mu}^{near}}{dE_\nu}} = \frac{\sigma_{\nu_e}^{Ar}(E_\nu)}{\sigma_{\nu_\mu}^{Ar}(E_\nu)} * \frac{\phi_{\nu_e}^{near}(E_\nu)}{\phi_{\nu_\mu}^{near}(E_\nu)}$$

Uncertainty

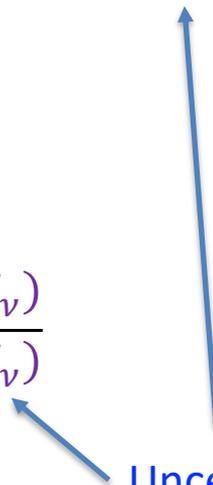

- Need to know
 - Flux & cross section ratios
 - Far/near extrapolation

Details II

- Since E_{ν}^{rec} is not equal to E_{ν}
- Need to understand
 - Detector effects in near and far detector
 - Relation of visible to neutrino energy
 - **NEUTRONS**
 - Cross section ratios
 - Near to far flux extrapolation
- Flux normalisation provides some cancellation
 - Shape is important, however

Near Detector needs to measure:

- ND Fluxes

$$\phi_{\nu_x}^{near}(E_\nu)$$

- Prior constrained 5-10%

- Total and differential cross sections on Argon

$$\frac{d^n \sigma_{\nu_x}^{Ar}}{da db dc \dots}(E_\nu) \quad (\text{Largely unknown})$$

- True to reconstruction “matrix”

$$T_{\nu_x}^{far}(E_\nu, E_{rec}) \text{ and } T_{\nu_x}^{near}(E_\nu, E_{rec})$$

- Depends on: Detector effects, xsections, nuclear effects

- Approach

- Measure as many exclusive differential cross sections with as much precision as possible

$$\frac{dN}{dX_{rec}} = \int \phi_{\nu_\mu}^{near}(E_\nu) \frac{d\sigma_{\nu_\mu}^{Ar}}{dX}(E_\nu) T_{\nu_\mu}^{near}(E_\nu, X, X_{rec}) dE_\nu dX$$

Flux measurements

- Primary thrust within DUNE near detector suite is to do measurements on Ar (Liquid and gas)
- Proposed measurements
 - Neutrino-electron scattering (LAr)
 - Low- ν method (liquid and gas)
 - Coherent Scattering(liquid and gas)
 - $\nu_l + N \rightarrow l^- + N + \pi^+$
 - $\bar{\nu}_l + N \rightarrow l^+ + N + \pi^-$
- Measurements on hydrogen (CH and gas)
 - $\nu_l + p \rightarrow l^- + \Delta^{++} \rightarrow l^- + p + \pi^+$
 - $\bar{\nu}_l + p \rightarrow l^+ + \Delta^0 \rightarrow l^+ + p + \pi^-$

DUNE Near Detector Concept Study

- The Near Detector Concept Study explored the requirements, technology and physics performance of a number of options for the near detector.
 - It was an approximately 2 year effort which included workshops at Fermilab and CERN and targeted study by 6 working groups
- The final report, providing recommendations for the near detector complex, was submitted to the DUNE Executive Board in July 2018.
- At the end of August, the Executive Board approved the recommendations that were proposed.

Main Near Detector Recommendations

- The recommended concept is a near detector suite consisting of a LArTPC (not in a magnetic field), a HPgTPC in a magnet, and a 3DST.
- The design of a mobile LAr detector that can make measurements at one or more off-axis positions should go forward (DUNE-PRISM). Study option of moving HPgTPC also
- The experimental floor area should be at least 42.5m x 17m and the hook height must be at least 13m, measured from the floor. The minimum lateral dimension of hall needs further study, and will ultimately be settled in EFIG.
- The option of filling the HPgTPC with hydrogen should also be investigated.



Multi-pronged approach

- Prong I: State-of-the-art Ar detectors:
 - LAr (~75t fiducial target mass), non-magnetized
 - Pixelated (raw 3D data)
 - Optically segmented
 - Neutron tagging
 - Multi-purpose Detector (MPD)
 - High-Pressure (10ATM) gas TPC (HPgTPC) (1t fiducial target mass)
 - In ~0.5T field (magnetic spectrometer)
 - Surrounded by high-performance ECAL and muon tagger
- Prong II: DUNE-PRISM
 - Move LAr and possible MPD off axis
- Prong III: 3 dimensional scintillator (CH) tracker (3DST) (4t)
 - Interactions on protons and carbon
 - Magnetized
 - With external tracking and ECAL

LAr: ArgonCube

- Underlying principles
 - True Raw 3D readout – in a sense, the first true LArTPC
 - Pad readout, no wires
 - S/N \gg than in conventional LAr TPCs
 - Better energy resolution and better pointing resolution
 - Modular, highly segmented
 - Short drift \Rightarrow little diffusion, low high voltage, less sensitive to impurities
 - Optically isolated modules \Rightarrow more effective use of scintillation light

LAr: ArgonCube design

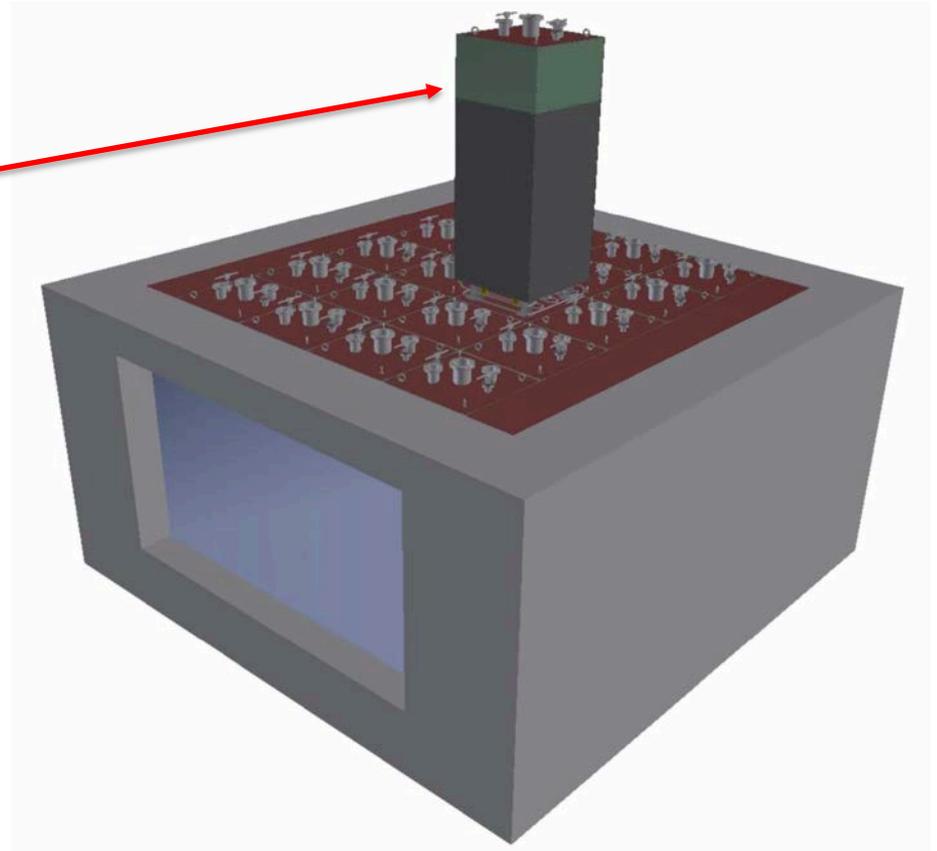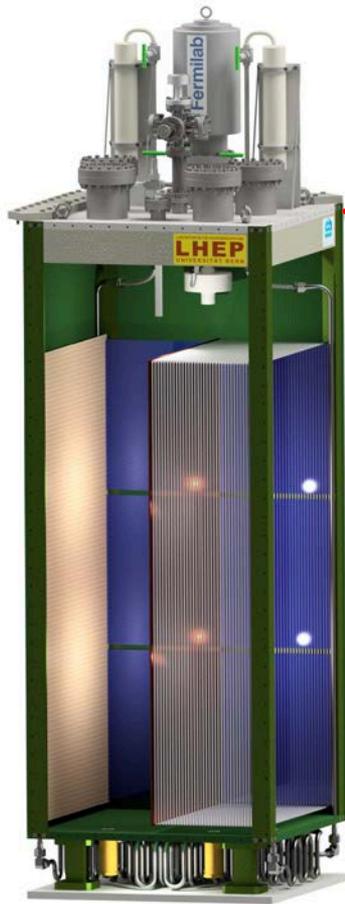

James will provide the details

Multi-purpose detector



- Central component is a large gas TPC operating at 10 Atm (HPgTPC)
 - Copy of ALICE TPC (5m in diameter X 5m long active)
 - Re-use the ALICE readout chambers were are being replaced during the current long shutdown (& engineering)
- HPgTPC surrounded by high-performance ECAL following designs developed in the CALICE program
- $\sim 0.5\text{T}$ B field
 - Superconducting design looks most promising
 - Open geometry
- Muon tagger outside coils
- MPD is essentially a Collider Detector design

MPD

ALICE being lowered into Hall



Magnet concept

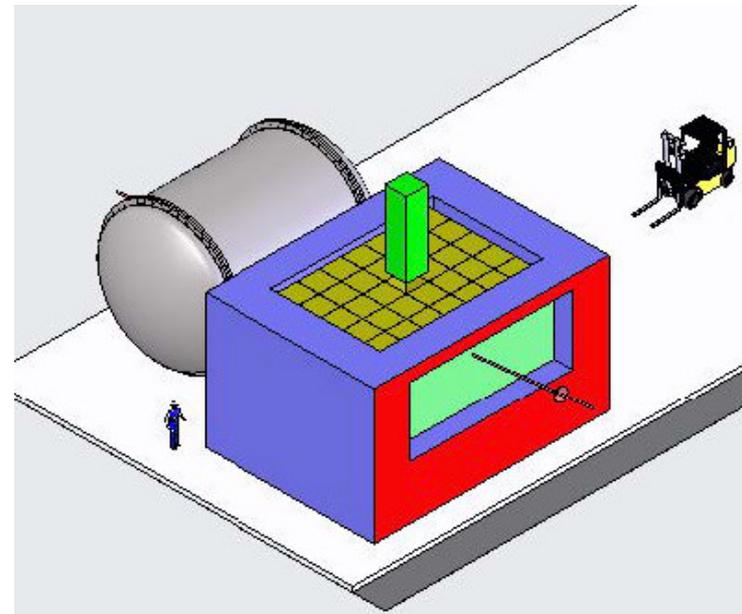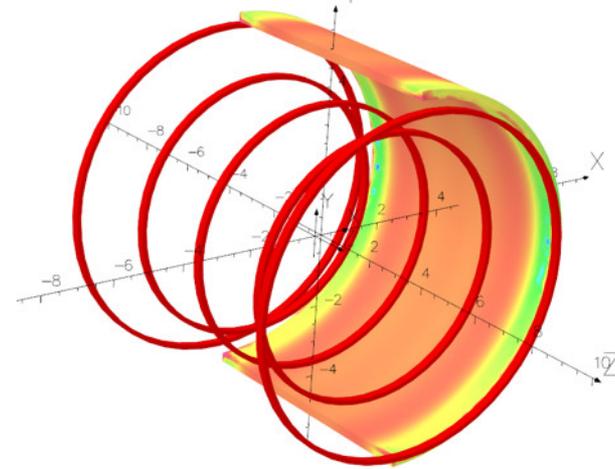


Tanaz will go into the details

3DST

- Magnetized system complementary to MPD/HPgTPC
 - Different target nucleus
 - High statistics tests of neutrino models
 - Connection to the existing catalog of cross section measurements on scintillator (K2K, MiniBooNE, SciBooNE, MINERvA, T2K, NOVA)
- Can remain on-axis when other detectors move off-axis
 - Accurate determination of the flux
 - High statistics measurement of the beam electron neutrino component


Clark will give the details

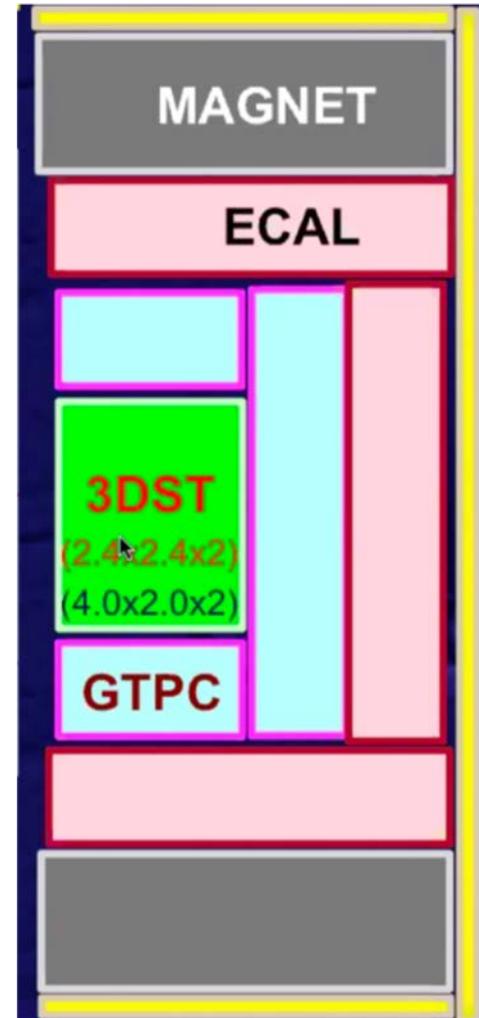

DUNE-PRISM


DUNE-PRISM

- By moving the near detector off-axis, we can measure different E_ν spectra
- This provides a new degree of freedom over which we can constrain E_{rec} vs E_{true}
- Goal is to make measurements as similar as possible in all off-axis positions

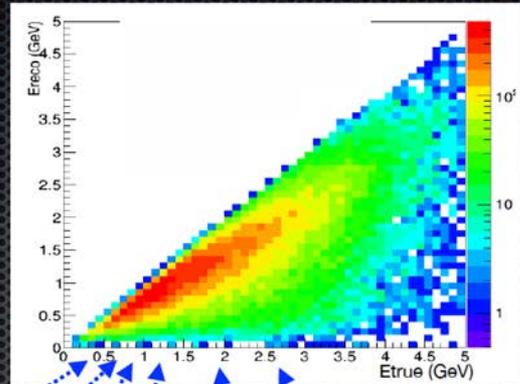

Beam

← Increasing Off-axis angle

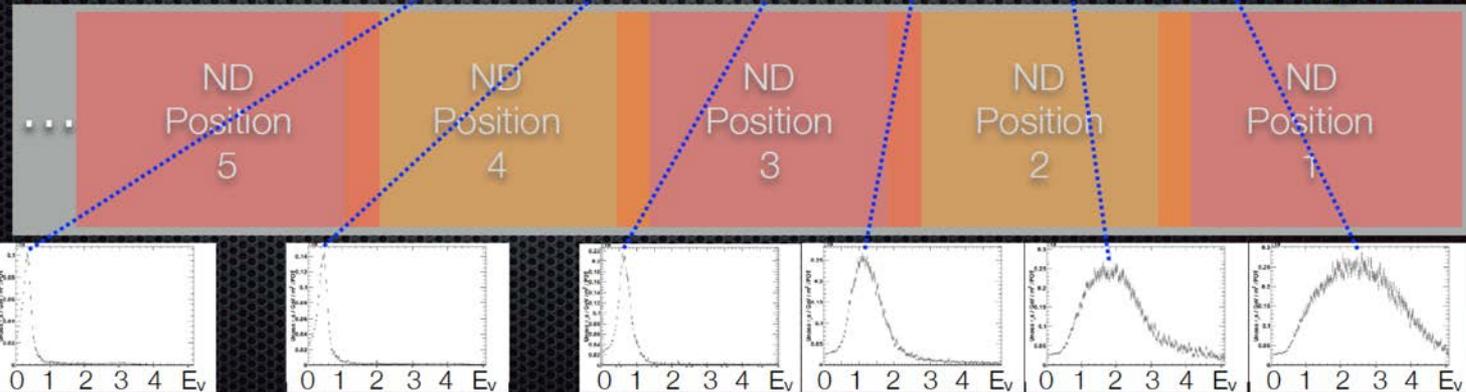


Use linear combinations to disentangle flux and x-section effects using different fluxes.

Cristovao will give the details


Where we house all this stuff

Hall: Reference design (2015 CDR)

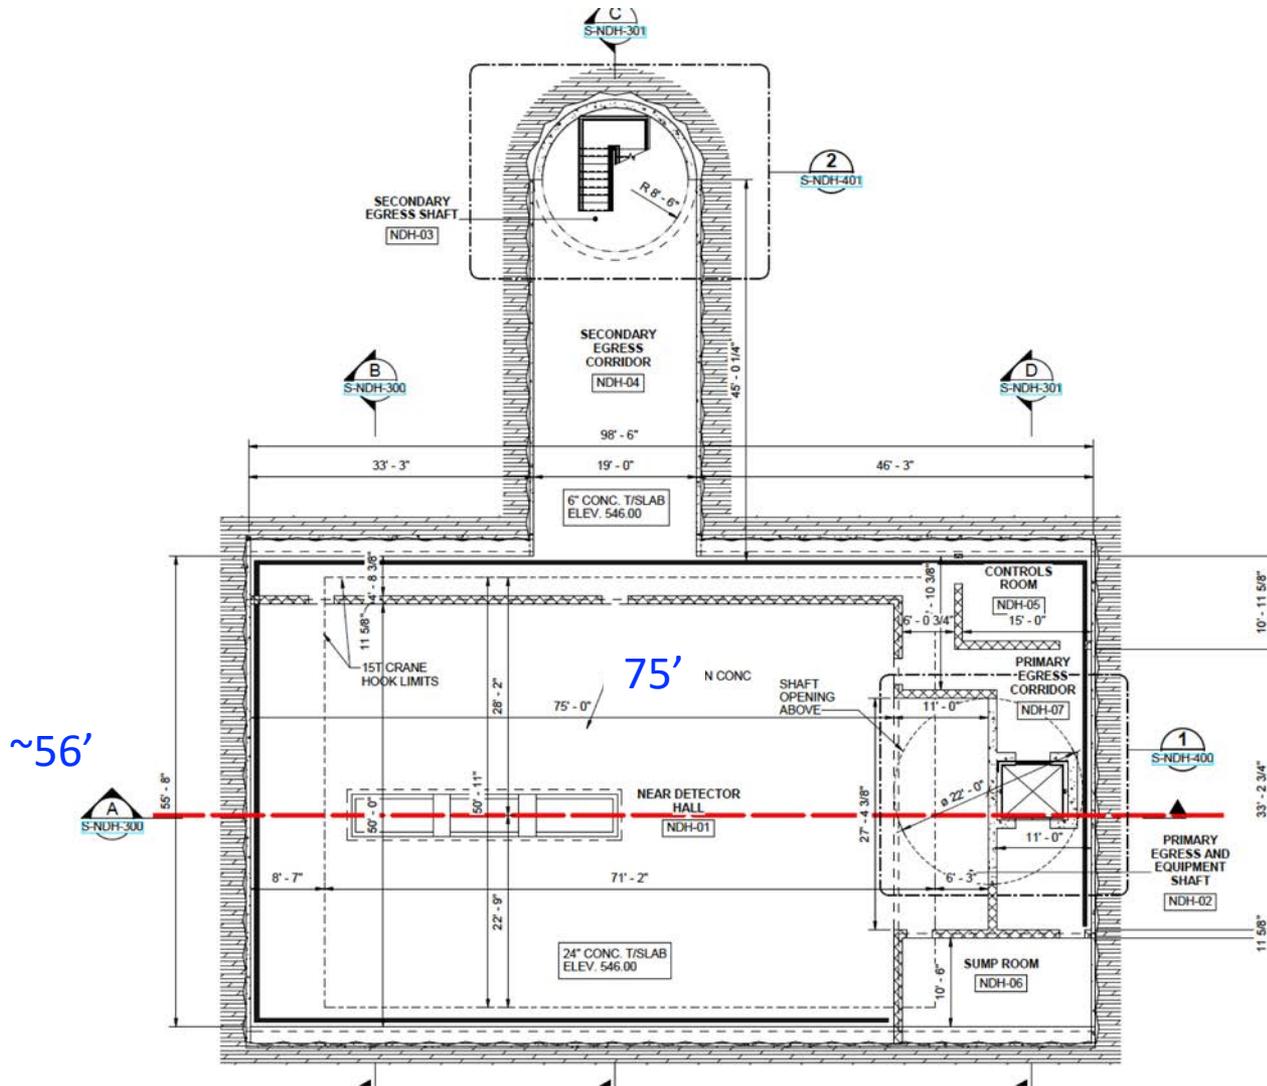

Hall: Reference design II



Beam's-eye view

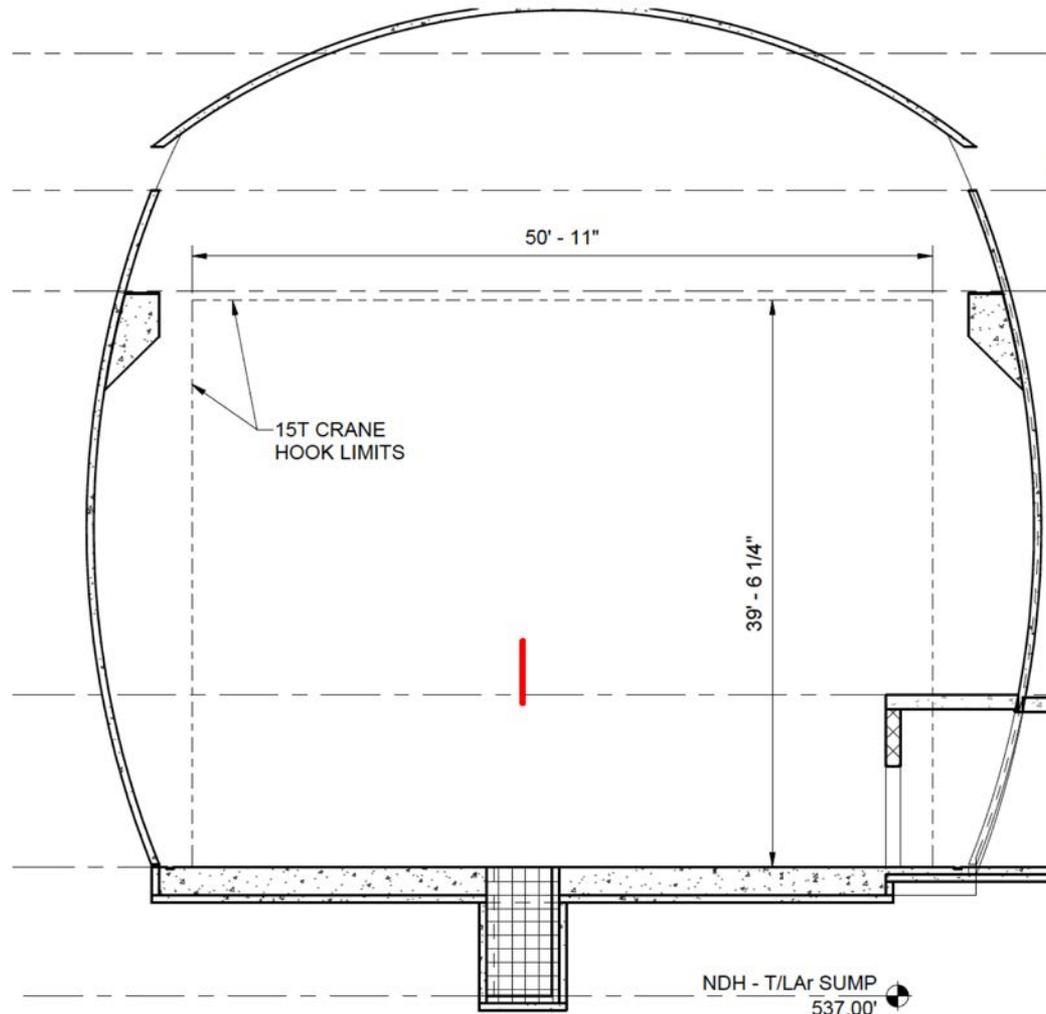

Hall: Reference design III

- It becomes obvious rather quickly that the hall reference design does not accommodate our current detector designs and run plan

Near Detector Hall: June 2018 Update

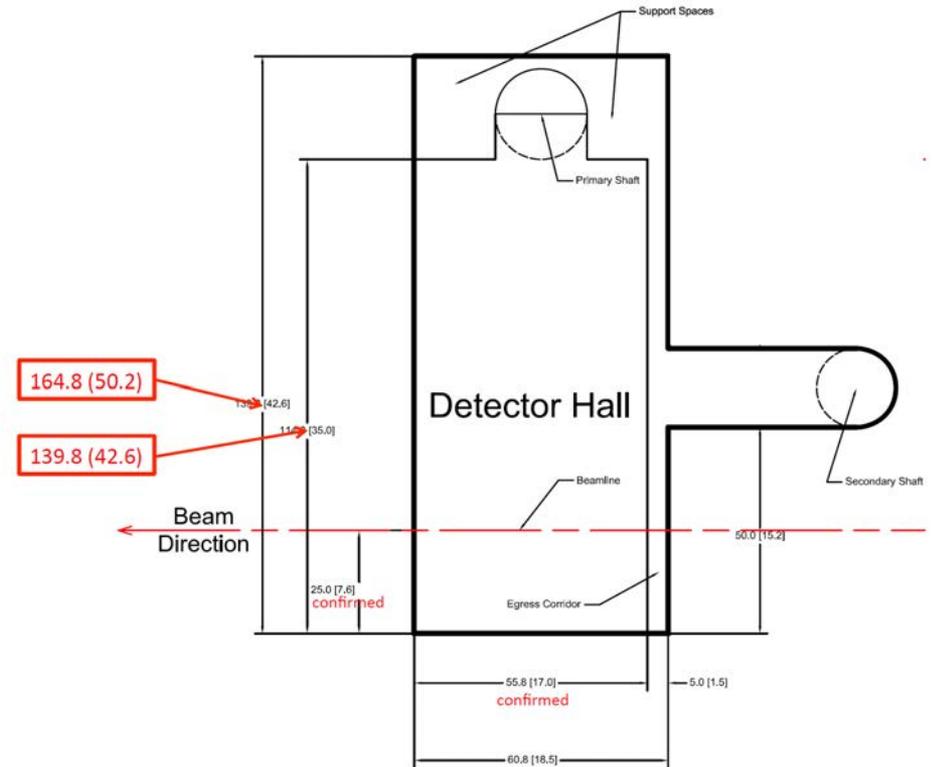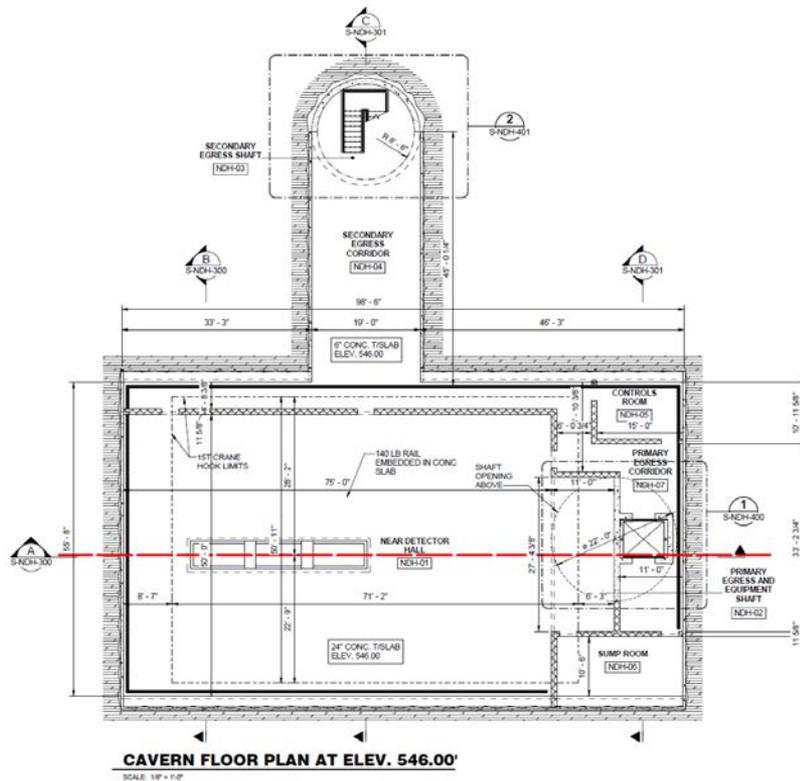


Reference ND Detector Cavern Concept:
100ft x 56ft Cavern with
75ft x 50ft Detector Hall

June 2018 ND Collaboration Proposal:
165ft x 61ft Cavern with
140ft x 56ft Detector Hall




Primary access shaft: Reference design

22' \emptyset

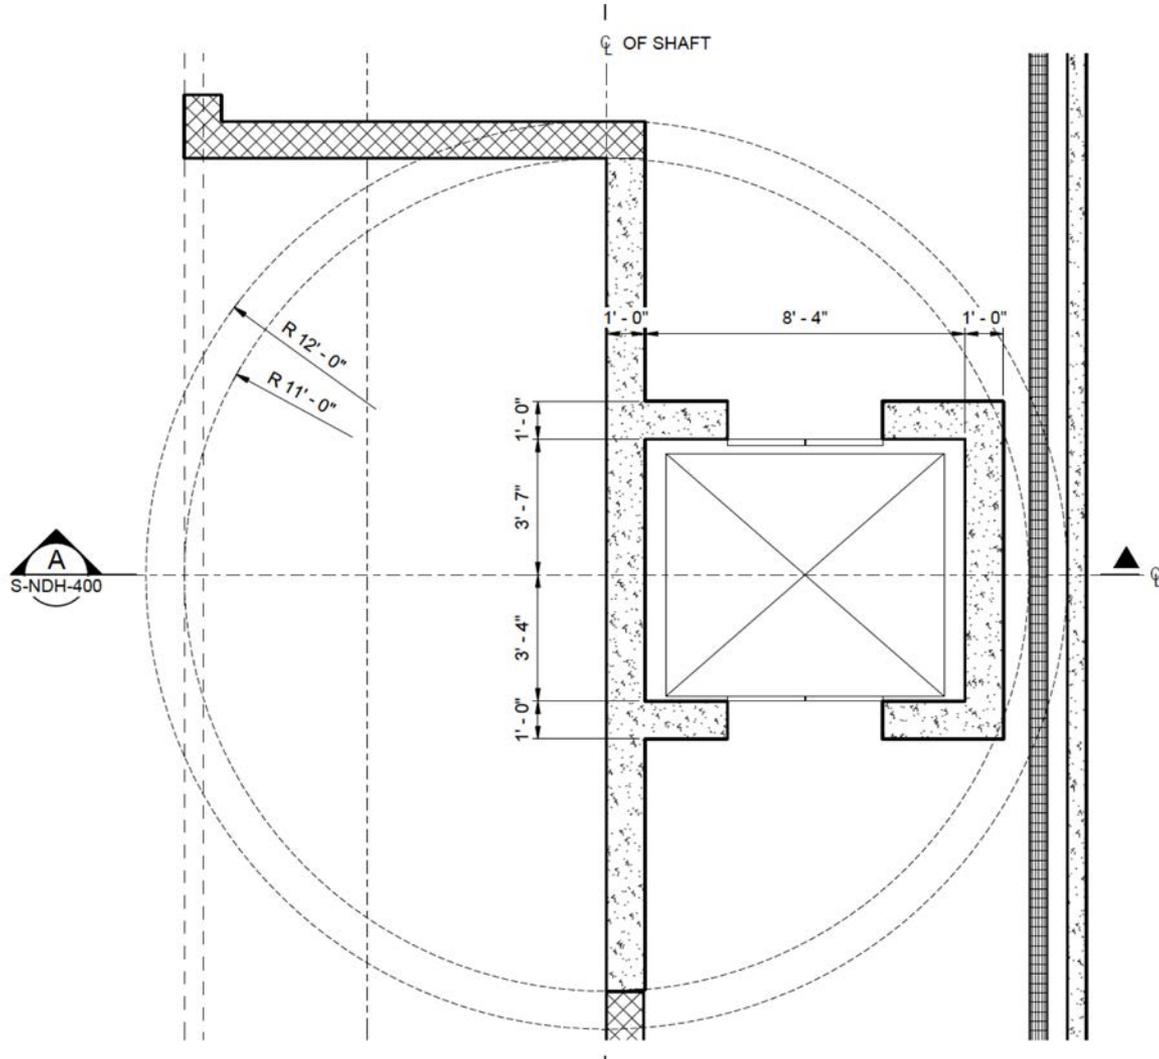


Larger Shaft – Size

- Reference shaft is 22ft ID
- Considered shaft diameters ranging from 32ft to 43ft ID
- Now looks like a **38ft** ID shaft provides a minimum of 0.5m clearance around HPgTPC and preserves lift/utility segment

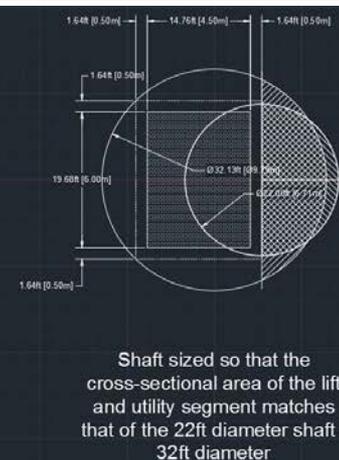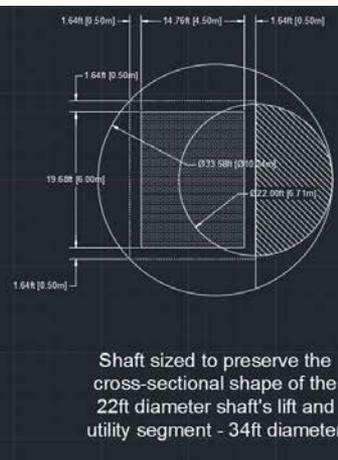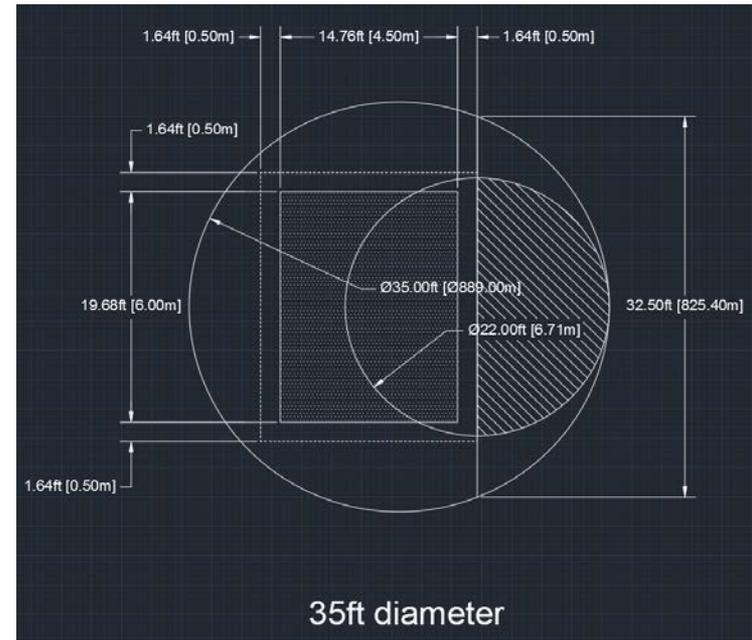

Larger cavern – cost savings?


- Although LBNF, DUNE and Fermilab management understands the benefits of the larger cavern and access shaft for the DUNE physics program
- Trying to see if some costs can be saved while keeping the larger hall footprint and larger access shaft
- Bring Down the Roof

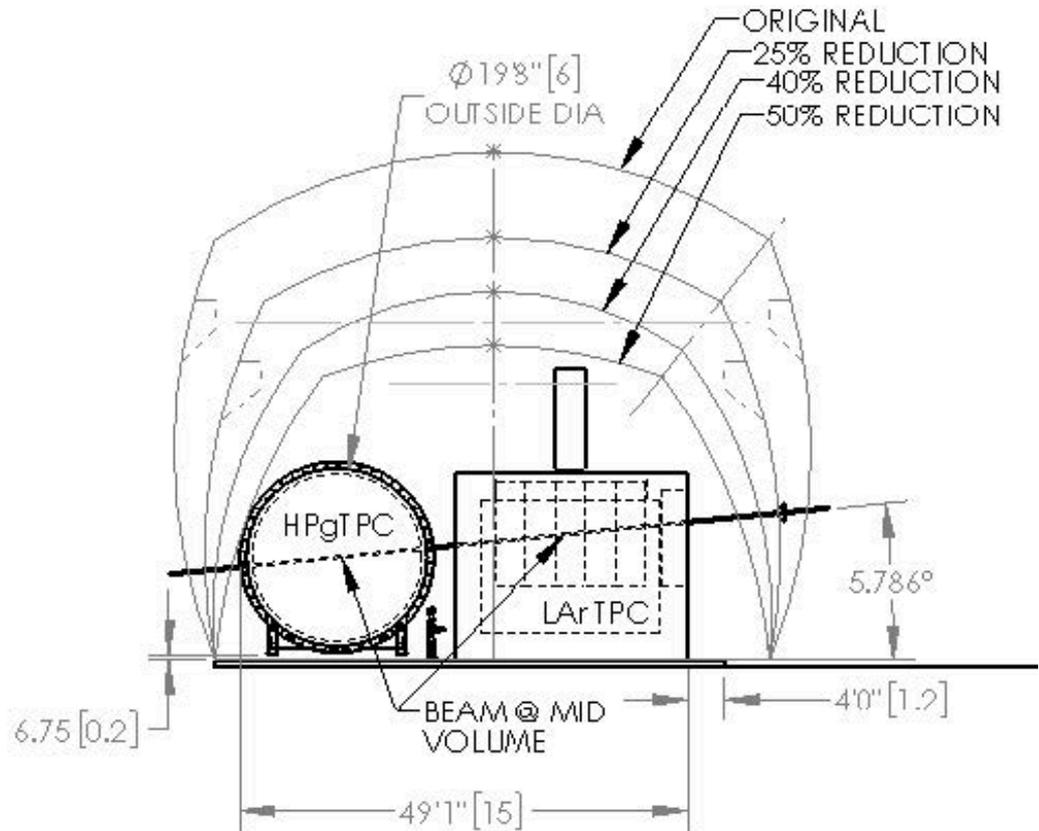

One More Thing

Unique capabilities of LBNF beam


High energy tune

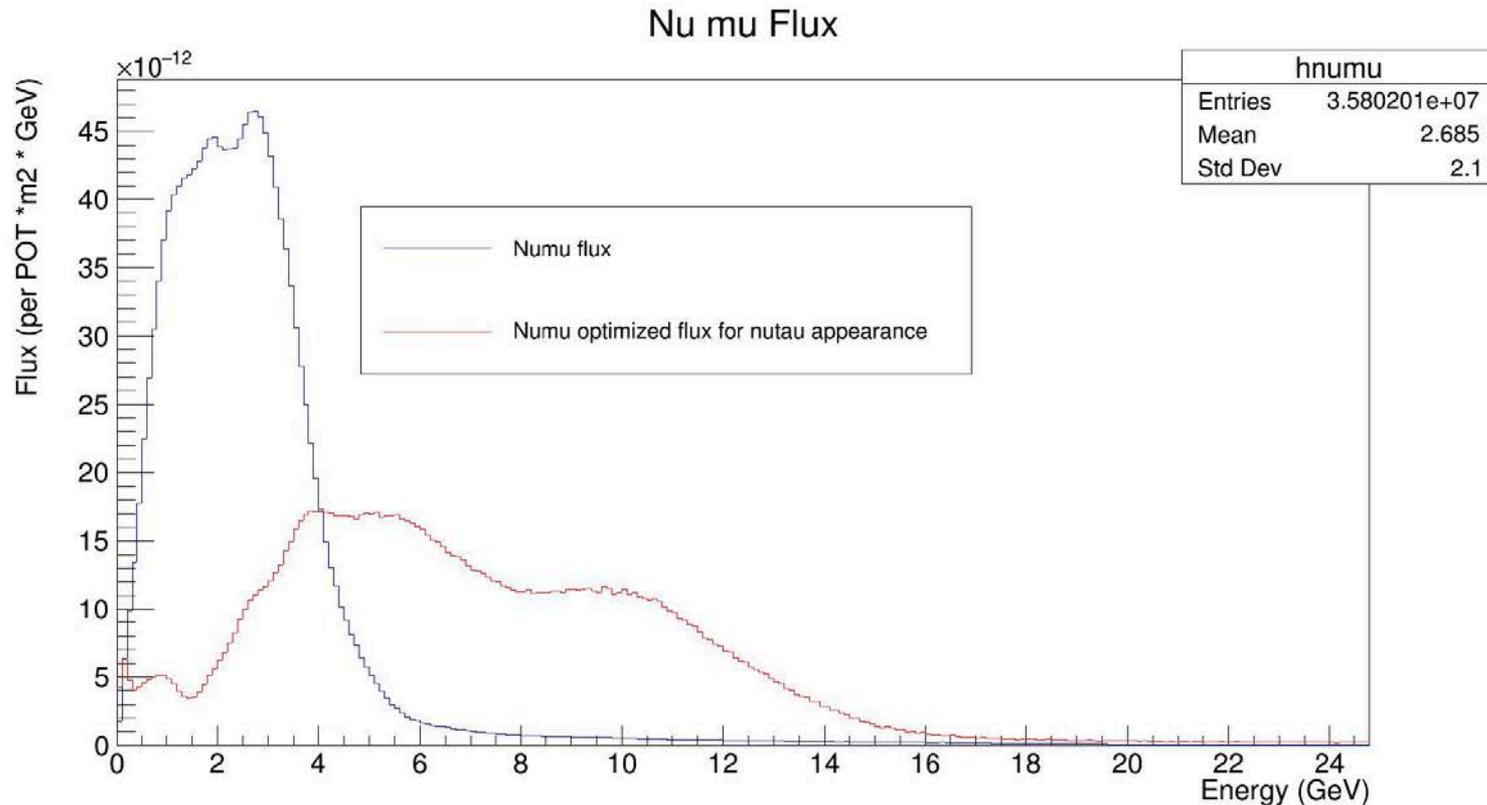

ν_τ Appearance

- No other planned experiment/facility can study tau neutrino appearance in a neutrino beam
- What physics topics can be studied with this beam at the near site?

~10X increase in ν_τ evts in Far detector

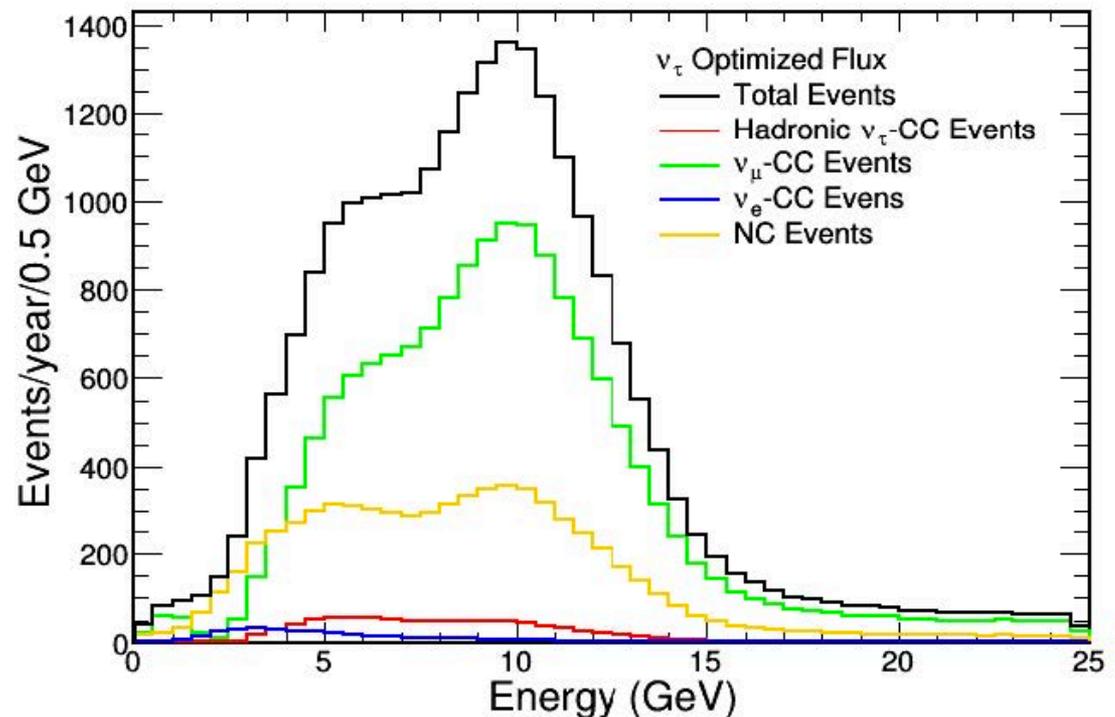

Conclusions and outlook

- The DUNE Near Detector Design Group (NDDG) has been formed to deliver a CDR for near detectors & the facility
 - I have outlined the basic approach that is being studied and which will form the bases of the CDR to a large extent
- Powerful, high-precision, full capability (calorimetric, spectrometer, PID, multiple target nuclei, off-axis measurements) detector systems
 - LAr, MPD (HPgTPC+ECAL+Magnet+ μ tagger), 3DST
- With these detectors and the LBNF beam we will accumulate enormous statistics in all channels, including neutrino-electron elastic scattering.
 - **$\sim 1.5\text{M } \nu_{\mu} \text{CC events/yr-ton (FHC)}$**
- Aggressive 3-pronged approach to CPV
- Opportunities to study physics beyond the νSM are extensive

THANK YOU