

KEYENCE

NEW Wide-Area 3D Measurement System
VR-3000 Series



***3D SURFACE MEASUREMENTS
IN AS LITTLE AS 4 SECONDS***

ONE-SHOT 3D MEASUREMENT

**JUST PLACE AND
CLICK TO COLLECT
3D DATA**



NEW

Wide-Area 3D Measurement System
VR-3000 Series

Measure an entire area in as little as four seconds with 0.1 μm vertical resolution


1 Quick, accurate 3D measurements

Analyze form, contour, and roughness with 780,000 data points in a single image


2 Complete 3D surface analysis

XYZ traceable measurements compliant with international standards

3 Unmatched measurement precision

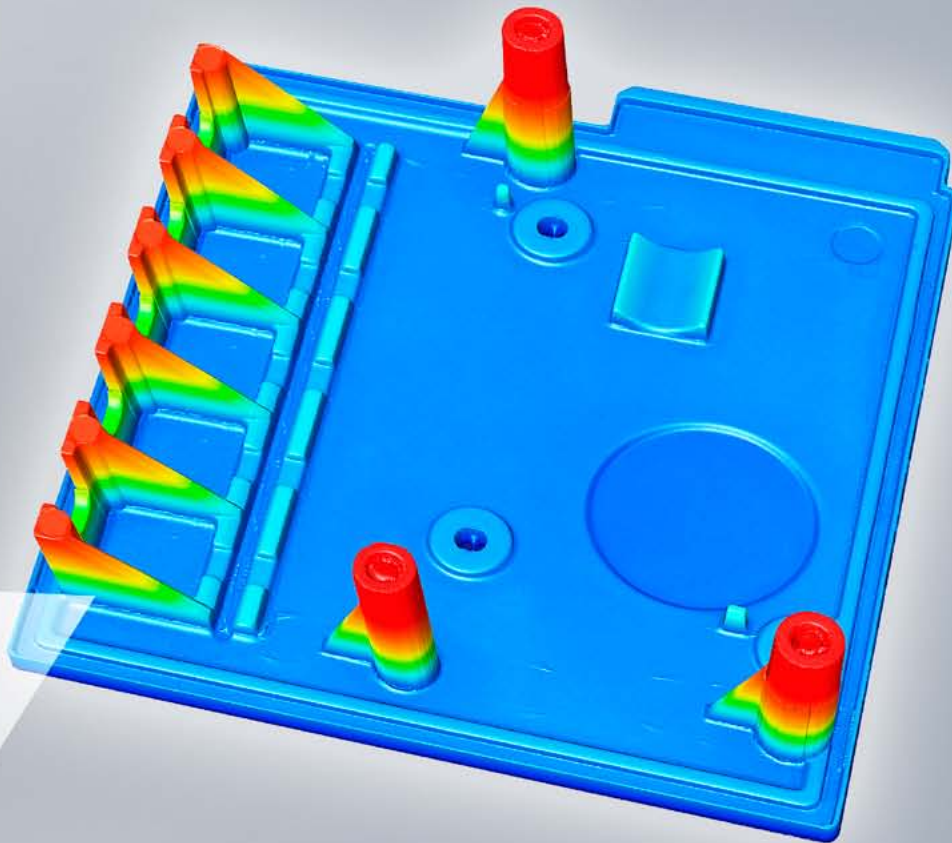

Conventional Measuring Instruments

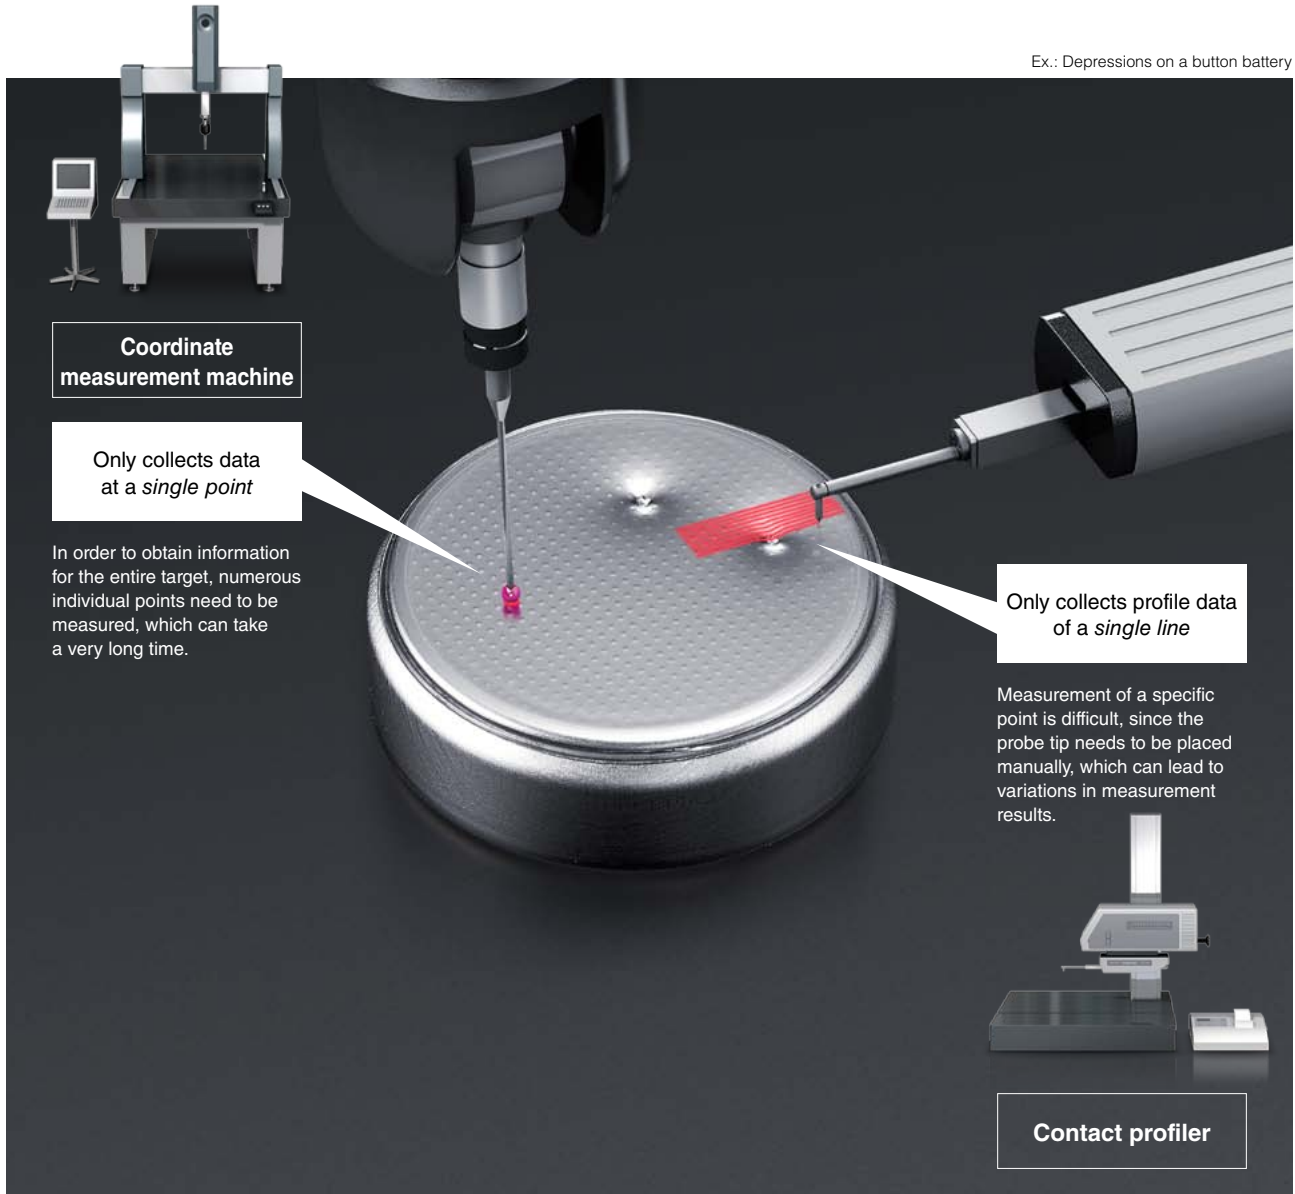

When measuring only points and lines


Typical measurement systems only provide measurement data on the areas that they are able to contact with a probe tip. Measuring specific locations by simply eying where to put the probe makes the results unreliable.

✘ *Measurement of specific areas is difficult*

✘ *Measurements take a long time*

✘ *Measurement results vary from person to person*

Wide-Area 3D Measurement System

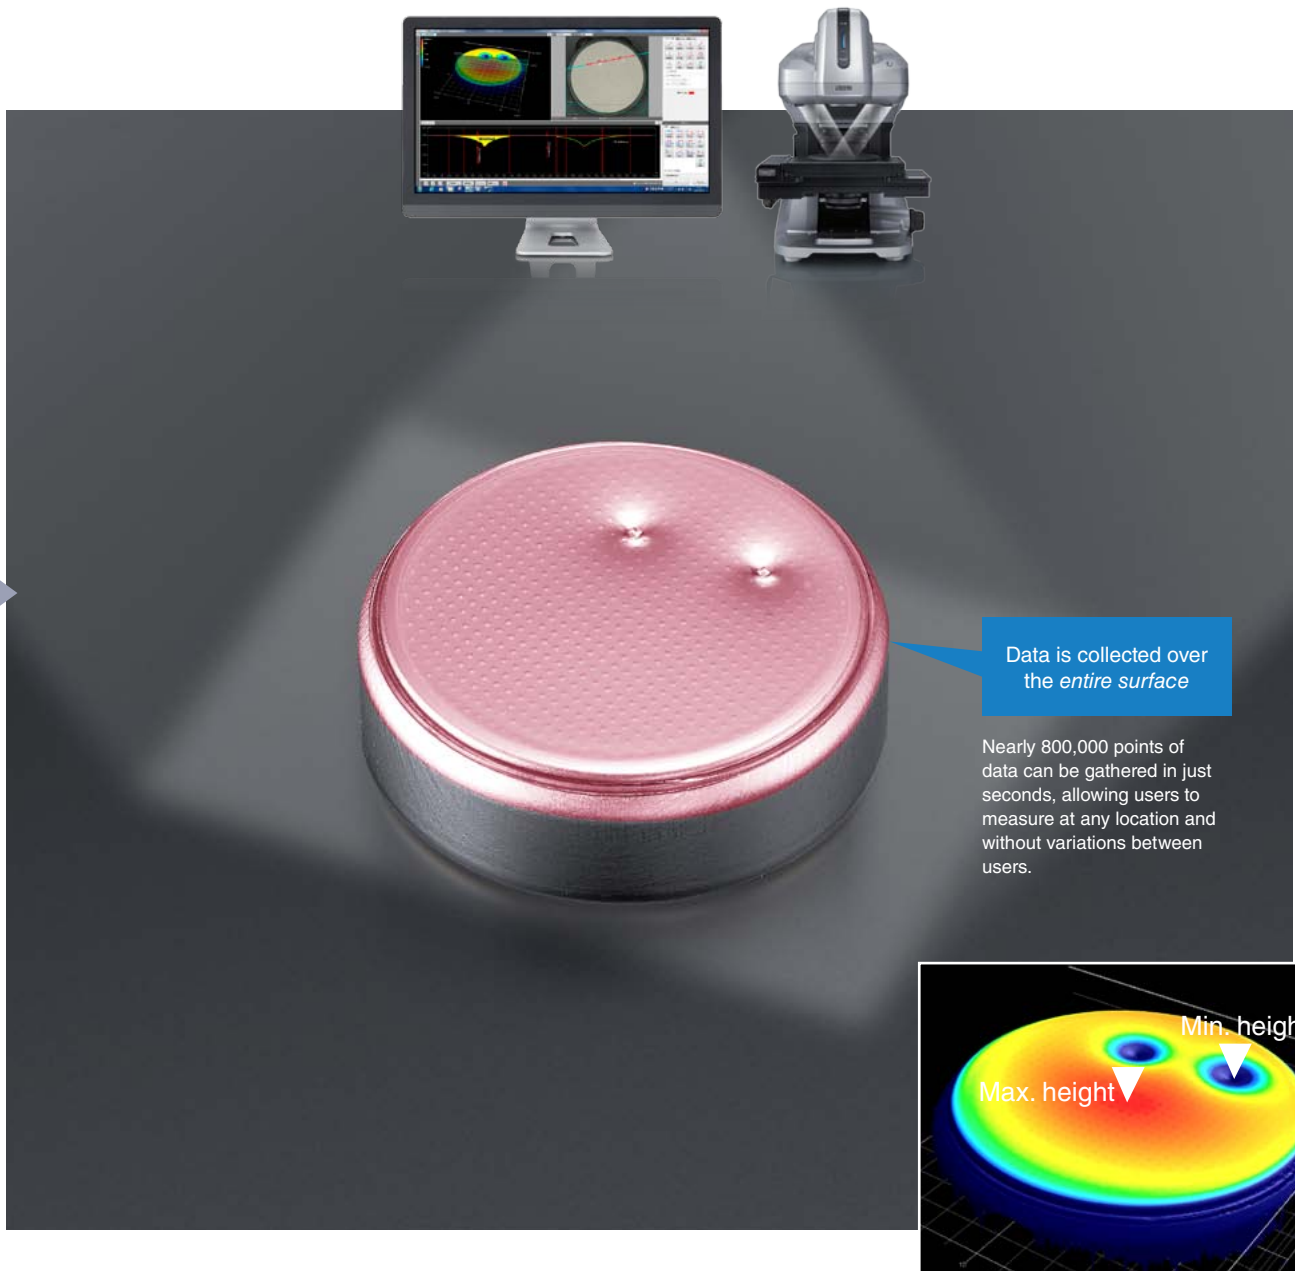

Non-contact surface scanning

The VR-3000 Wide-Area 3D Measurement System quickly scans the entire topography of a surface so that reliable measurements can be made at any point on an object.

✓ *Max and min heights can be reliably measured*

✓ *Scans in as little as 4 seconds*


✓ *Repeatable and reproducible measurement results*

1 Quick, accurate 3D measurements



Just click!

**Measurements in
as little as 4 seconds**

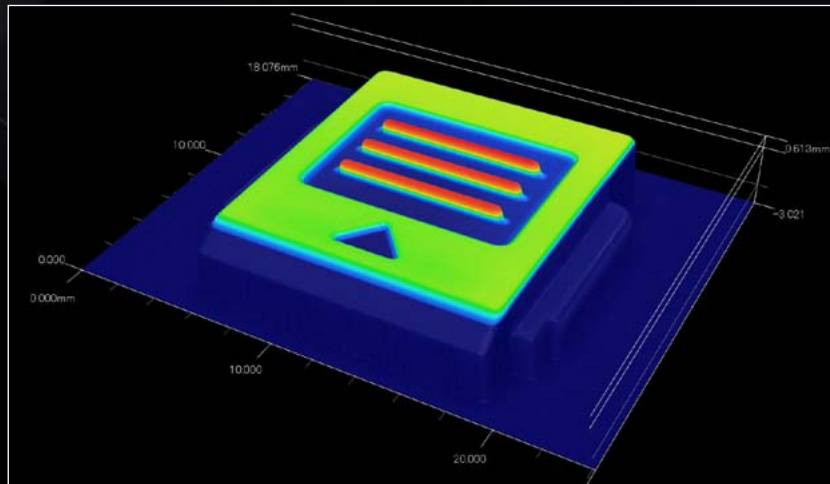


Anyone Can Measure Quickly and Accurately

Highly-reproducible measurements with 0.1 μm z-resolution in as little as 4 seconds



Fast measurement with no need to worry about probe placement


With conventional profile measurement systems, a user may spend a lot of time positioning the probe tip to touch the correct area of the target. The VR-3000 Series makes it simple by only requiring that the user place the sample on the stage, and then click the Measure button to collect data in as little as four seconds.

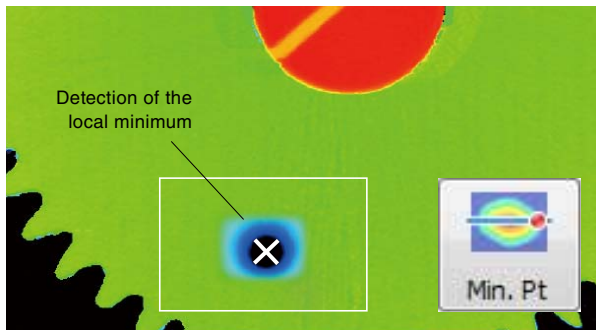

Scans the entire surface to ensure that no data is missed

With the VR-3000 Series, 3D information for the entire surface is obtained with a single scan. Users can see the overall shape of the target, including the highest and lowest points, without having to re-scan the surface or guess-and-check as to whether the correct location has been measured.

With conventional profile measurement systems, set up and measurement is time-consuming.

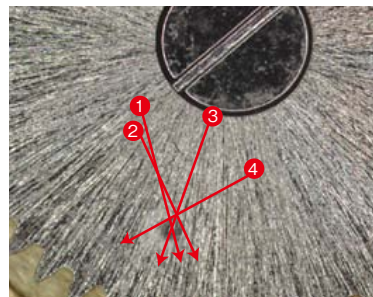

Dent measurements

Precise positioning is difficult.

Various adjustments are required, such as selection of the sample type, stylus tip, and measurement parameters. In addition, it's nearly impossible to tell whether measurement of the designated point has been performed.

User-caused errors are frequent.

Extensive training is required.

Difficult to reproduce results.


2 Complete 3D surface analysis

**Measure
the entire surface,
not just points or lines**




With a CMM or contact profiler, it's necessary to measure several places in order to try to understand the shape of the surface.

With a coordinate-measuring machine...
measurement is performed at a **point**

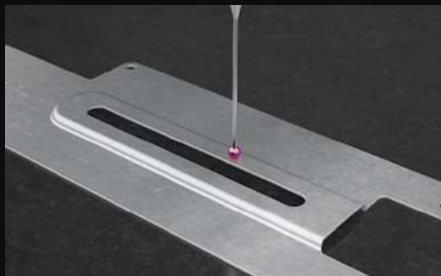


With a profile measuring instrument...
measurement is performed in a **line**

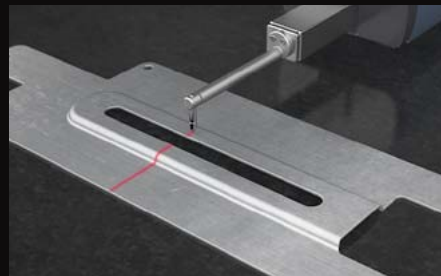

Visualize Your Surface Like Never Before

Measure the entire surface and analyze the overall shape

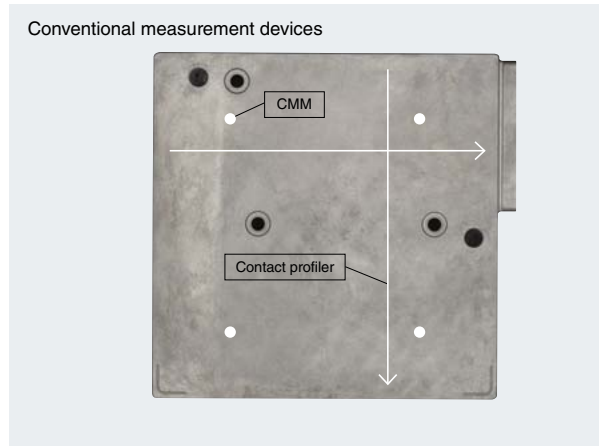


When measuring with points and lines...

With point and line measurements, it's hard to know where to measure when trying to find the difference between the highest point and the lowest point.

No way to see the highest or lowest points

Difficult to measure exact locations

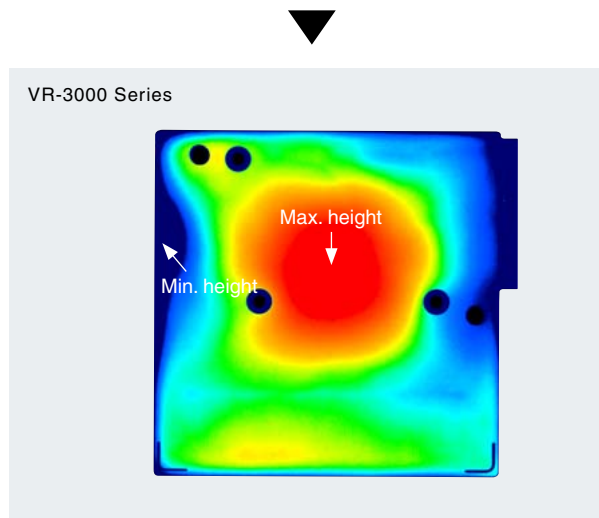


With one-shot 3D measurement

One-shot measurement of the entire surface is performed, making it possible to see a target's overall shape and waviness.

See highest and lowest points at a glance

Quickly obtain the overall shape

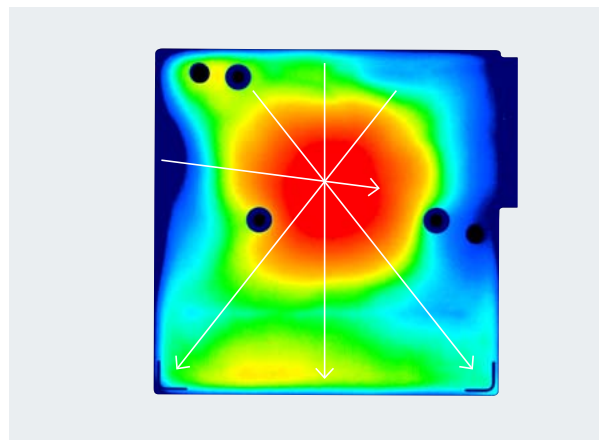

Measure any location after just one scan

Because the VR-3000 Series shows the overall shape of a target, including the highest and lowest points, measurement can be done for any targeted area. The surface data obtained can also be reanalyzed and measured at any point in the future.

3 *Unmatched measurement precision*




Non-Contact, High-Accuracy Measurement

Measurement principle

Light-section method


Triangulation measurement of height differences using structured illumination

Patterned light is emitted from the transmitter lens and projected onto the surface of the object. When the reflected light is viewed from a different angle using the receiver lens, the light appears banded and bent due to the height changes on the object's surface. A CMOS camera is used to capture the reflected light, and based on triangulation, the height and position can be calculated.

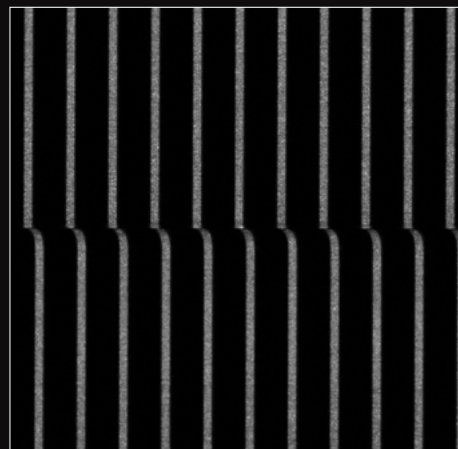

Highly-efficient measurement algorithms

Accurate, repeatable, and traceable results

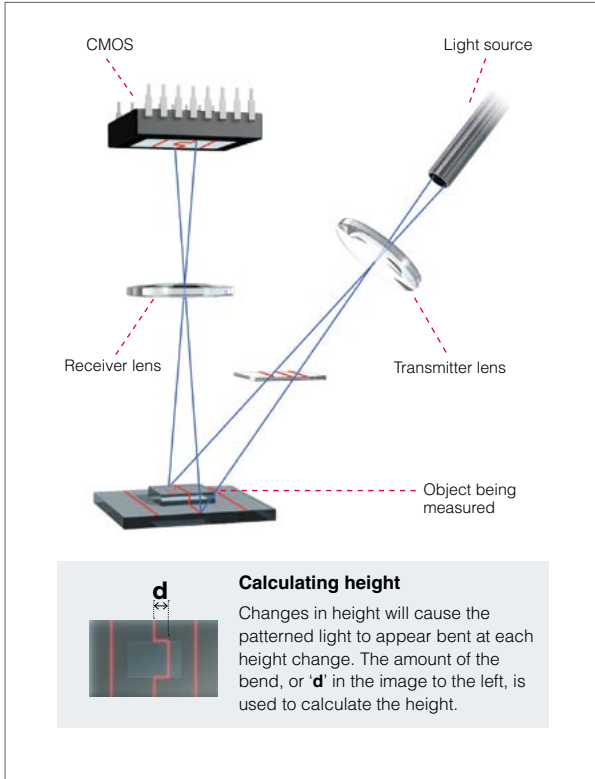

One-shot 3D Algorithm


We combined our TMT one-shot algorithm for high-accuracy, true color measurements with our high resolution 3D technology to create the world's first algorithm for instant 3D measurement.

TMT (Telecentric Multi-Triangulation) Algorithm

By using three, double-telecentric lenses with the multi-triangulation technology of our displacement gauges, we have created a unique algorithm for quick and accurate 3D measurement.

Real color 3D Technology

Red, green, and blue light from a dedicated lighting unit are captured by a new high-accuracy CMOS sensor. Images captured separately with each light color are compiled to create a full color image. This process produces vivid and detailed images that cannot be obtained with a standard color camera and white-light illumination.

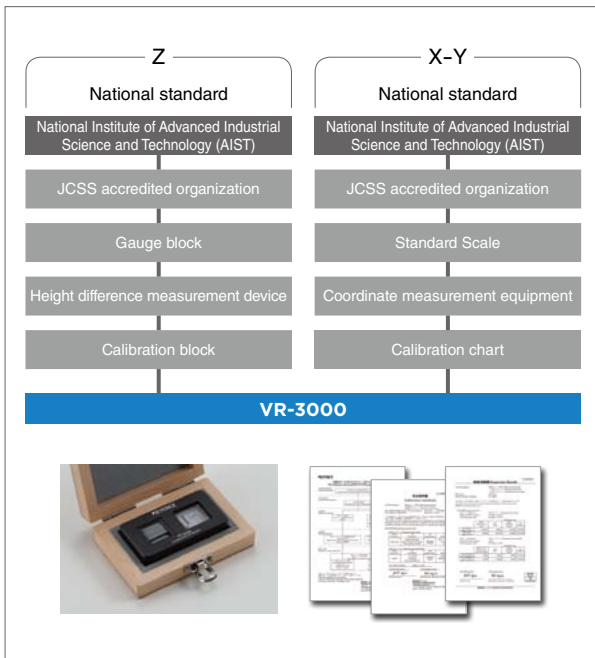

XYZ Traceability

The measurement results, obtained using the world's first algorithm of its type, are traceable according to international standards, so users can obtain highly-reliable measurements.

Calibration

An inspection report and calibration gauge with calibration certificate are standard items included with each system. The gauge uses the same reference scale used by JCSS certified operators. Instead of hiring a technician to perform calibration, users can easily do it themselves on-site.

Technology designed for high-precision


Sophisticated optics and hardware



Three, Double-telecentric Lenses


To achieve high-accuracy 3D measurement, it is crucial that the transmitter and receiver lenses are made in such a way to minimize distortion, and that changes in the distance between the object and lens do not alter the size of the image. The VR-3000 contains a total of three wide telecentric lenses, used in combination with the industry's largest CMOS. The advanced optical design allows high-accuracy one-shot 3D measurement of areas up to 3 cm 1.18° .

Telecentric Lenses Improve Accuracy

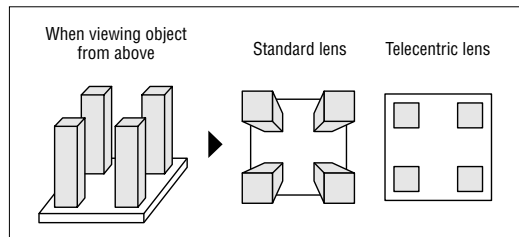


Feature size is unchanged as the lens moves through focus

When measuring objects with height differences, it is important that the field-of-view remains constant as the lens moves in the Z direction. By using a telecentric lens, the VR-3000 can accurately measure height differences up to ± 5 mm $\pm 0.20^\circ$ at one time.

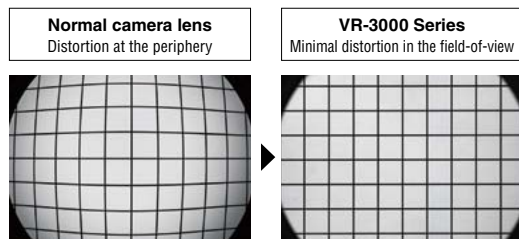


Minimizes distortion at the periphery

When measuring a wide area, stretching 30 mm 1.18° diagonally, in one shot, telecentric lenses will result in minimal distortion throughout the entire field-of-view. Telecentric lenses also provide clearer, sharper, and more accurate image details.

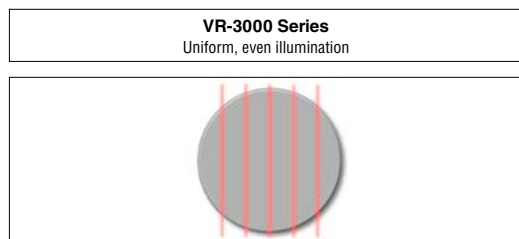

Transmitter lens provide uniform illumination


With a telecentric lens, the target is illuminated evenly throughout the entire measurement range. This allows for high-accuracy measurement of the target no matter where it is placed.

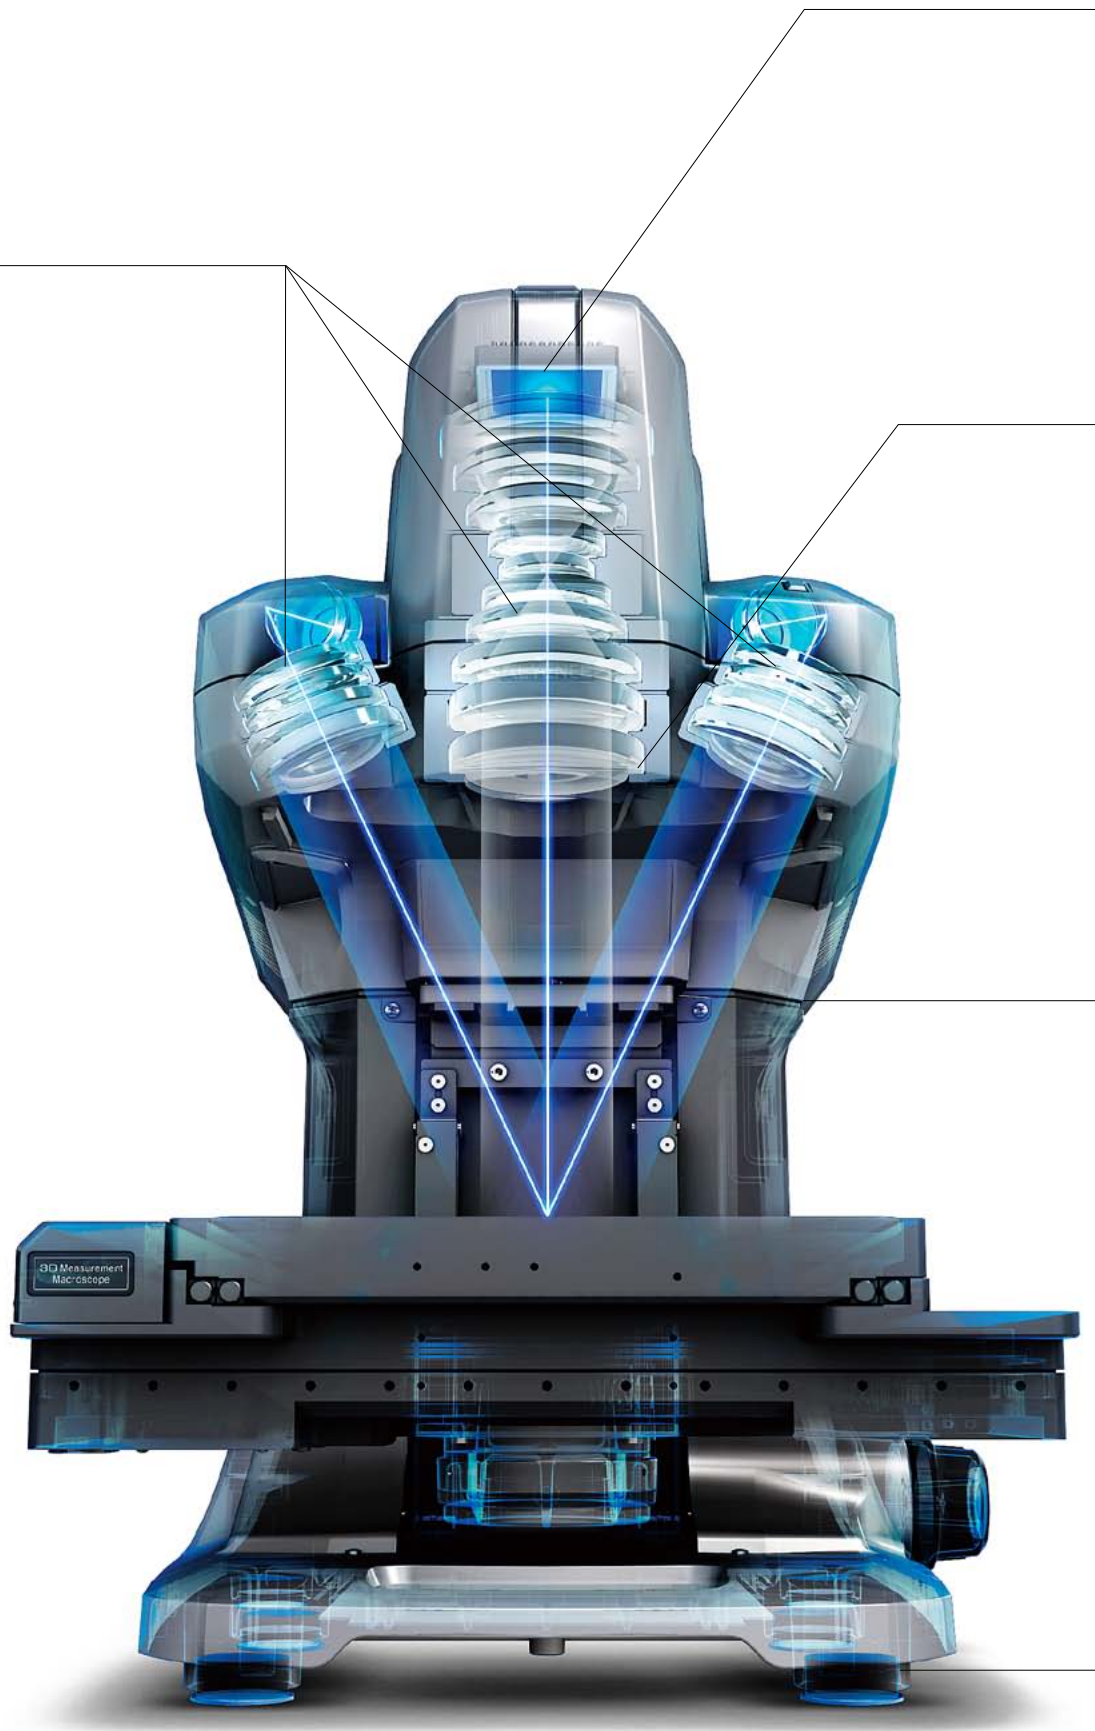

Accurate Imaging

High-accuracy CMOS sensor

The industry's largest high-accuracy CMOS is used, allowing data to be obtained with minimal noise for high-resolution image capture.

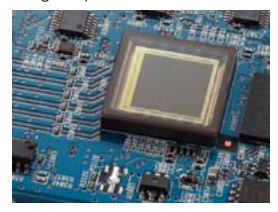

Real color light unit


The VR-3000 has a light source that emits red, green, and blue light for true color reproduction. The combination of an optical system and optical fibers minimizes inaccuracies when composing the color.



No Vibration Isolation Required

Designed to withstand large amounts of vibration

Strength analysis was used to create a highly-rigid frame and remove the need for vibration isolation equipment, such as an air table. The image below is a diagram of the strength analysis on the structure of the system.

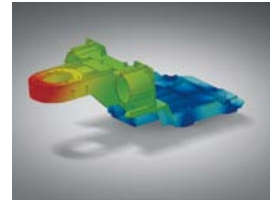


Specially designed vibration-proof rubber

The VR-3000 is equipped with vibration-proof rubber with over four times the vibration prevention of conventional materials. The material absorbs a wide range of vibration, from low to high frequencies, allowing for stable imaging and measurement even at high magnifications.



Numerous measurement and analysis functions




From shape and roughness to volume and 2D measurements

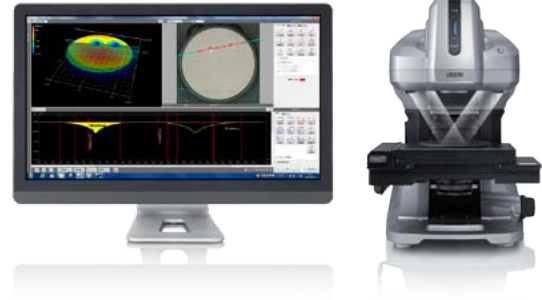

Height/width/angle/radius measurement

Profile measurement


Measurements such as height, width, cross-sectional area, angle, and radius can be made by simply pointing and clicking across the desired area. Up to 12 different types of measurements can be performed.

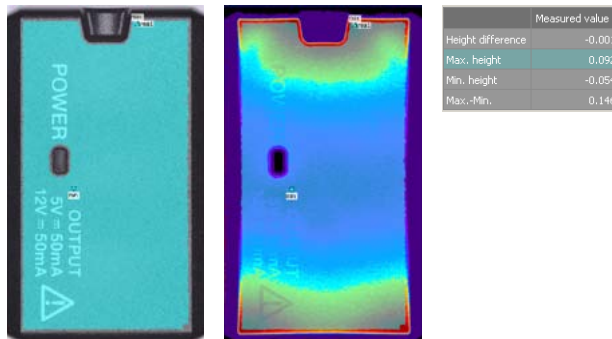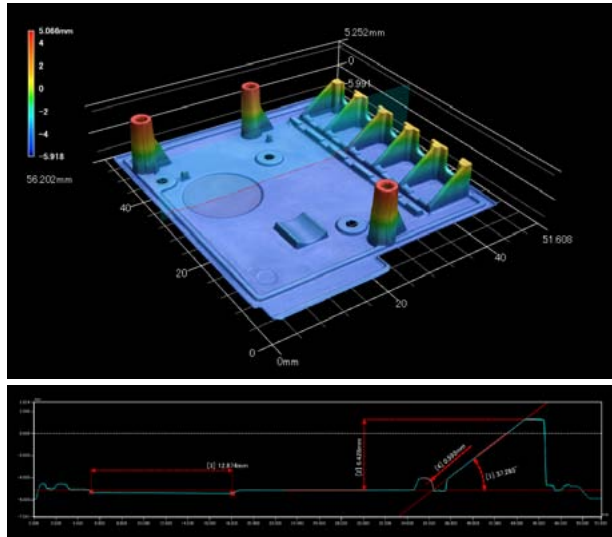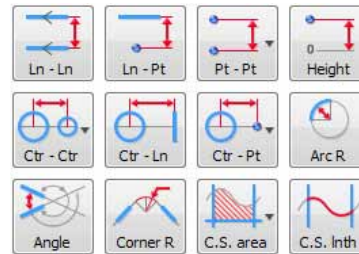

Height difference/planarity measurement

Measure average height difference

Height differences between two surfaces can be measured using 780,000 data points. The surface data can also be used for performing planarity measurements.

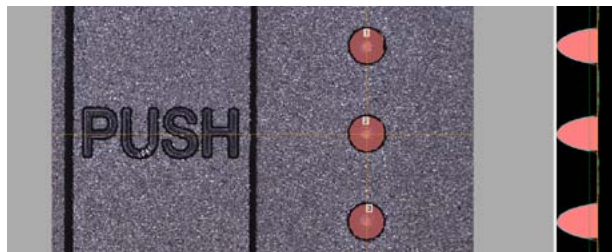






Volume/area/counting

Measure volume and surface area

Using height data, a target's volume, area, and the XY dimensions of a specified height can be measured. Counting can also be performed simultaneously.

	Volume	C.S. area	Surface area	Surface area	C.S. area	Area ratio	Average height	Max. height	Perimeter	Max. Perim	Vol. Perim	Vol. Perim	Circle equivalent dia	Circularity
	mm ³	mm ²	mm ²	mm ²	%		mm	mm	mm	mm	mm	mm	mm	mm
Total	1.111	3.950	4.999	3.298	1.981	0.511	1.419	12.279	8.816	8.911			1.885	2.492
Max	3.468	1.120	1.669	1.267	0.581	0.338	0.481	4.297	1.395	1.318			1.296	0.969
Min	0.442	1.114	1.665	1.265	0.580	0.338	0.479	4.223	1.271	1.295			1.293	0.968
Avg	0.442	1.117	1.665	1.265	0.580	0.338	0.480	4.243	1.271	1.310			1.293	0.968
Std. Dev	3.052	0.002	0.002	0.001	0.001	0.001	0.001	0.014	0.014	0.014			0.001	0.004
1 Height	0.606	0.007	0.009	0.001	0.001	0.001	0.001	0.043	0.033	0.033			0.003	0.013
1	0.442	1.114	1.665	1.267	0.580	0.338	0.479	4.223	1.271	1.295			1.293	0.968
2	0.446	1.120	1.669	1.265	0.581	0.338	0.481	4.297	1.271	1.318			1.296	0.969
3	0.446	1.117	1.665	1.265	0.580	0.338	0.480	4.243	1.291	1.318			1.296	0.969

Support for a wide range of measurements, from 2D to 3D

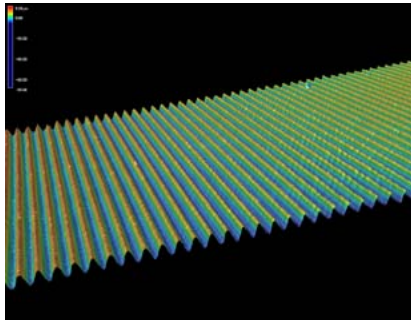



No	Measurement name	Measured value	Unit
1	Evaluation length	7822.51	µm
2	Sampling length	800.00	µm
3	Rp	4.85	µm
4	Rv	4.86	µm
5	Ra	3.22	µm
6	Rq	3.66	µm
7	Rt	75.75	µm
8	Ra	2.91	µm
9	Rz	2.23	µm
10	Rsk	-0.01	
11	Rku	1.51	
12	MSm	99.85	µm
13	Waa	1.41	
14	RzJIS	9.20	µm

Curvature, line roughness (ISO 4287: 1997), surface roughness (ISO 25178)

Line roughness

Calculate typical roughness parameters, such as Ra, Rz, etc. With several measurement options available, even measurements that are difficult to perform with contact profilers, like those on circularly-shaped parts, can be done.

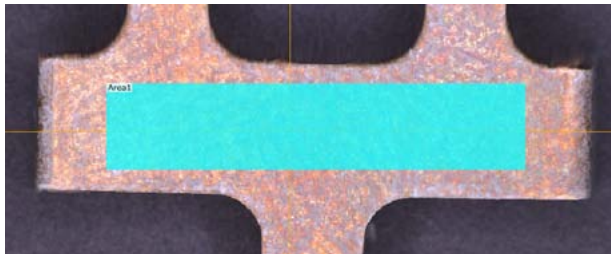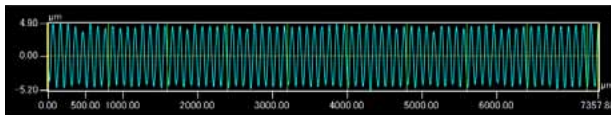



Surface roughness

Measure surface roughness in accordance with ISO 25178. These measurements evaluate data over an area, giving more reliable roughness results by taking into account more data points.

	Sq	Ssk	Sku	Sp	Sv	Sz	Sa
	um			um	um	um	um
Area1	1.25	-1.90	7.96	2.42	6.64	9.05	0.85
Area2	1.03	0.96	3.34	3.48	1.77	5.24	0.83
Area3	1.66	-1.51	5.22	3.60	8.64	12.22	1.23
Max.	1.66	0.96	7.96	3.60	8.64	12.24	1.23
Min.	1.03	-1.90	3.34	2.42	1.77	5.24	0.83
Ave.	1.31	-0.82	5.51	3.16	5.68	8.85	0.97
Std. DV	0.26	1.27	1.90	0.53	2.89	2.86	0.18


2D measurement

Various 2D measurements are available including distances between points, lines, and circles, diameter, and angle. Users can also measure the height at specific points on the image by just clicking the location on-screen.

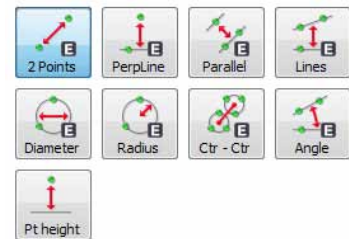
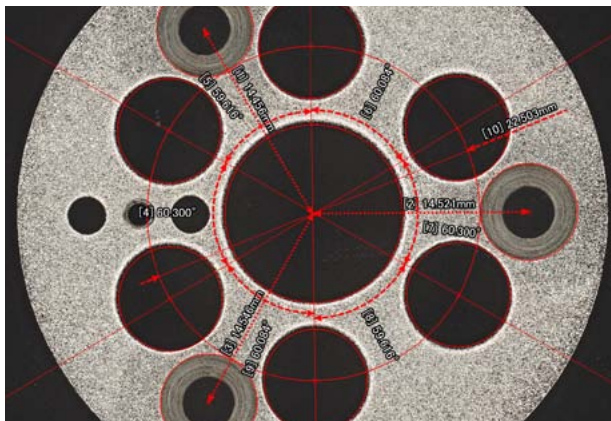


Compare and differentiate between multiple samples simultaneously

NEW Multi-file analysis function

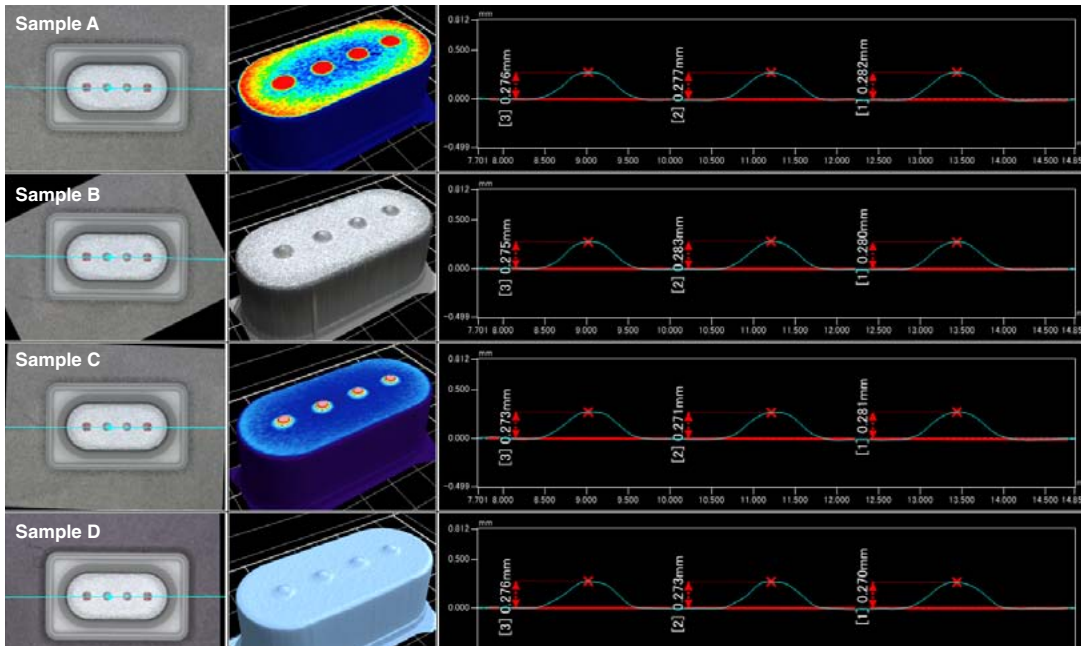

Measurements including cross-section, volume, area, planarity, and roughness can be performed on several files simultaneously and under the same measurement conditions. For example, users are able to see changes in topography or shape between prototypes that were made under different manufacturing conditions or to visualize and measure surface wear over time. This greatly reduces the number of operations and process time required for measurement and prevents mistakes from occurring due to changes in measurement conditions.

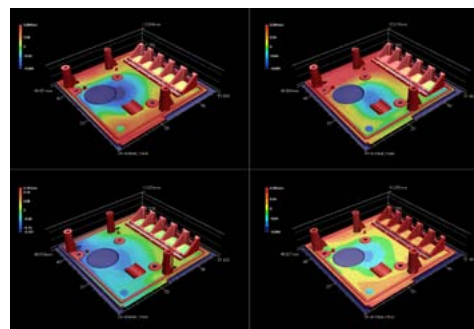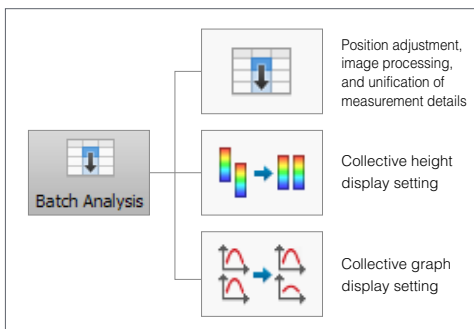


Batch analysis of multiple files: Auto Arrange function

Auto Arrange makes it possible to batch process all the data through a single operation, reducing analysis time and preventing measurement errors.

Quickly compare topography: 3D List Display function


Visually compare 3D images from multiple samples side-by-side for easier understanding and explanation of surface changes or differences.

Advanced support functions for improved analysis

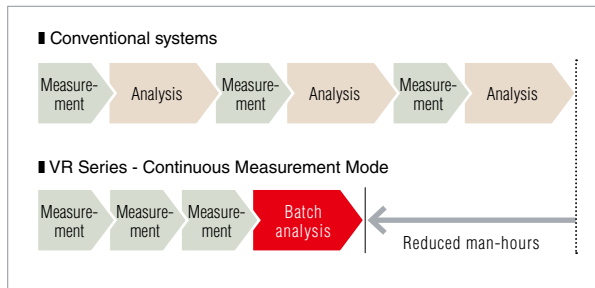


Efficient data collection: Continuous Measurement Mode

The VR-3000 Series incorporates a continuous measurement mode that captures data in a more streamlined process. Measurement can be done without moving between software, allowing work to be performed with greater efficiency.

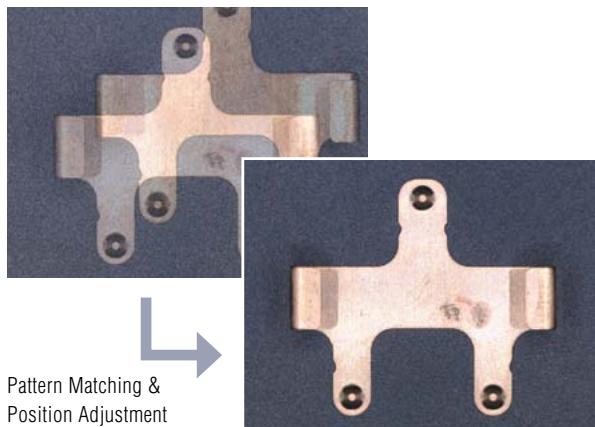

High reproducibility: Position Adjustment & Pattern Matching

A semi-transparent master image is displayed on-screen to be used as a reference for position alignment. Simply place the object near the reference image and click a button to perform automatic positioning. Additionally, small changes in alignment can be corrected through the use of highly-accurate pattern matching.

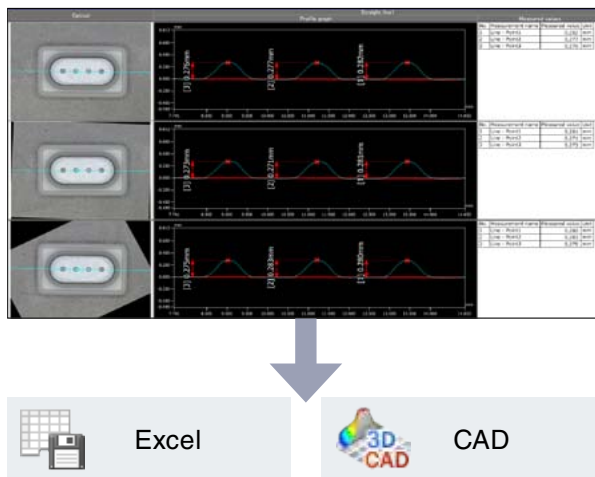


Output and analyze data post-process: Excel Data Output/CAD Output


Data collected by the VR can be output directly to Excel exactly as it appears on the screen. In addition, all measurement results can be exported to CAD, including STL, STEP, and ASCII file types, giving you a wide variety of options in how the data can be utilized.

Visualization and quantification of surface shape differences

NEW Profile comparison measurement function

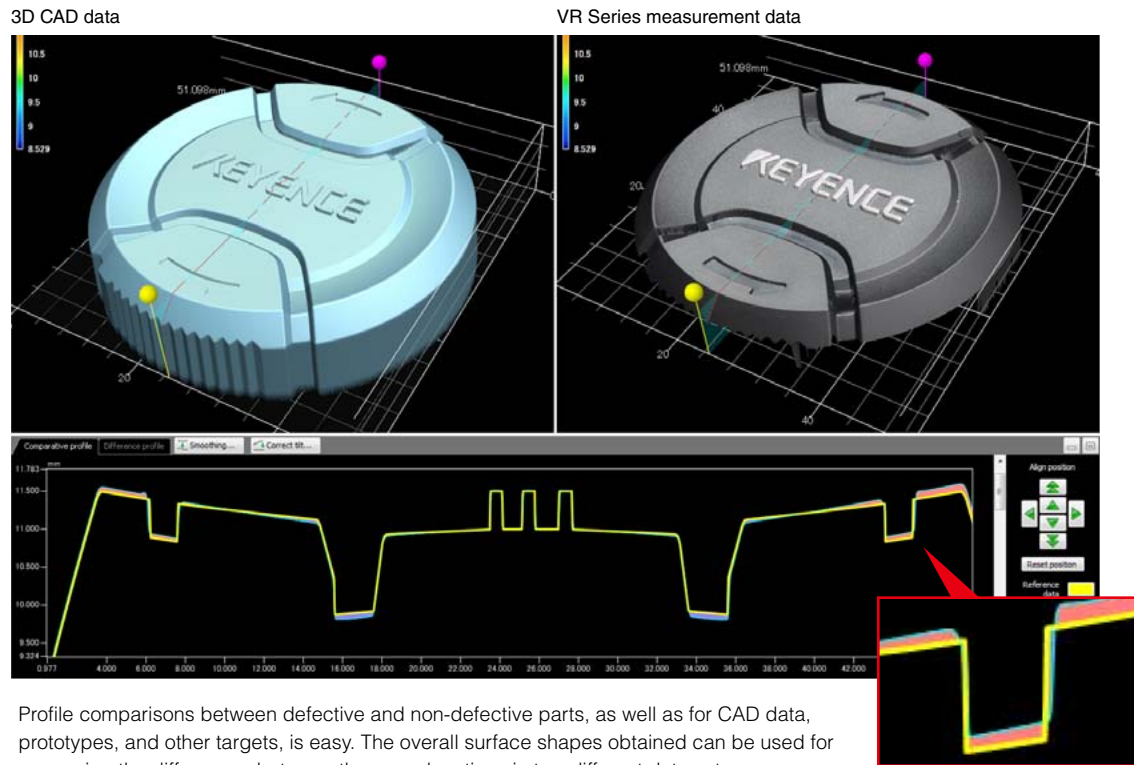


Profile comparisons between defective and non-defective parts, as well as for CAD data, prototypes, and other targets, is easy. The overall surface shapes obtained can be used for measuring the differences between the same locations in two different data sets.

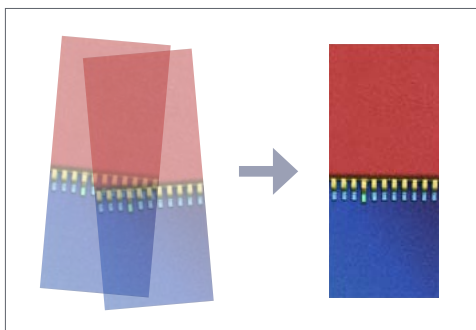

No complex settings: Auto Position Adjustment function

3D position adjustment for tilting and height misalignment is done automatically by taking into account various elements, including reference planes.

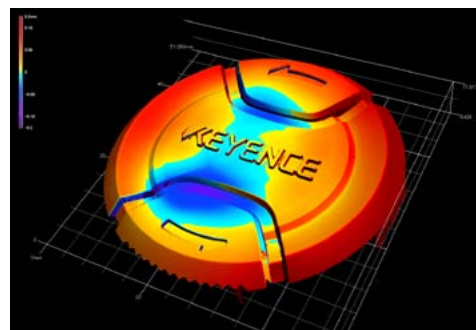

Visualization of shape differences: [Subtraction] Color Display function

Two objects can be overlaid, and areas higher than the reference are displayed in red while lower areas are displayed in blue. This makes it possible to check differences visually.

* VR-H2P software module is required for the data comparison function, and VR-H2CA software module is required for CAD comparisons.

Quick and easy 3D shape inspection

NEW Pass/Fail judgment function




Based on registered tolerances, pass/fail (OK/NG) judgment can be made as soon as measurements are taken. This saves inspection time in various quality and analysis applications such as setting prototype conditions or performing acceptance inspections.



Easy configuration of program settings: **Program Settings function**

Configuring program settings is simple. No special training is required. Registered inspection setting files can also be used in other systems.


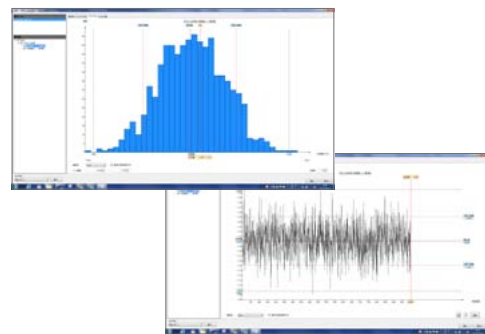


Efficient management of measurement results: **Statistical Analysis function**


Measurement results are automatically stored in the database, and trend graphs and histograms are automatically created. Reports to be submitted to relevant parties can also be created automatically, minimizing the time required for various operations following inspection.

Measure form and contour over a wide area

Image stitching function

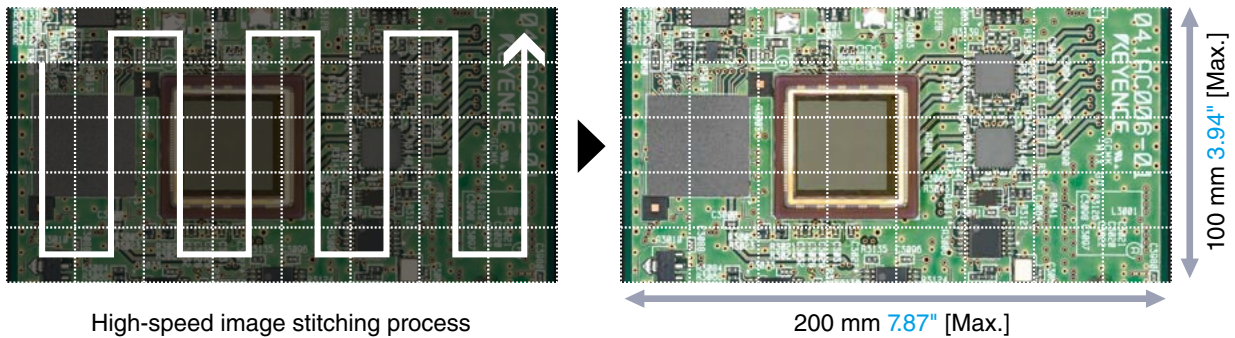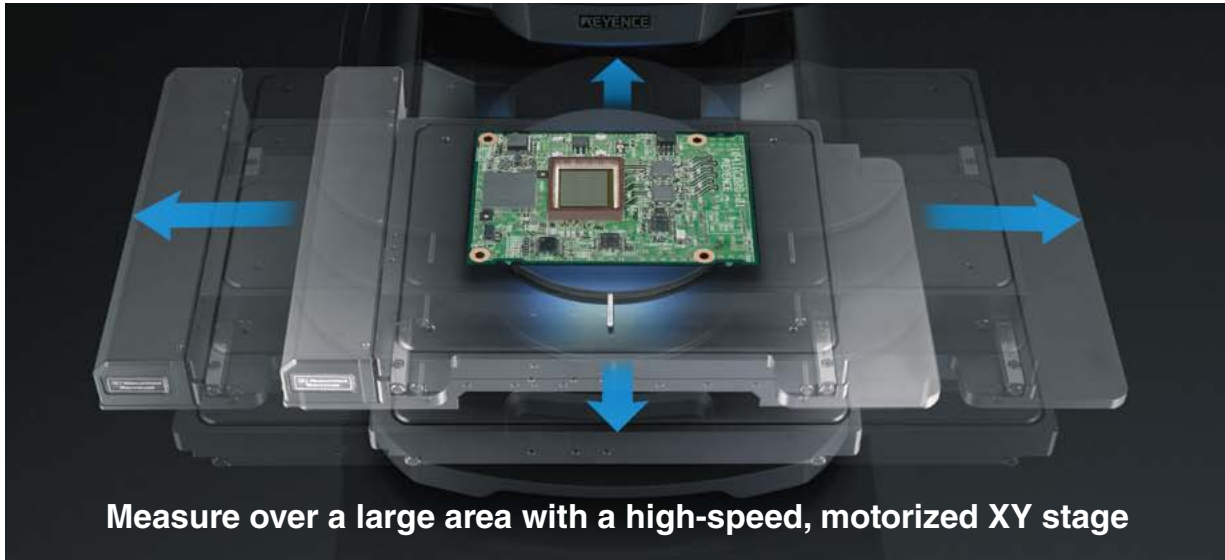


Precision measurement is ensured even on a stitched image.

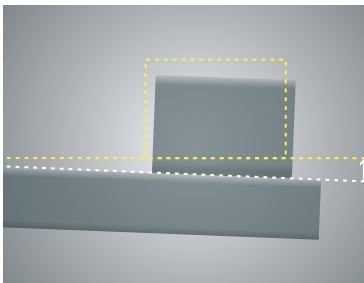


Incline correction

Stage inclination caused by the weight of an object can be accurately corrected using a built-in stage sensor.

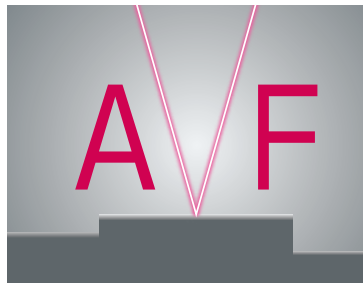

Auto Focus mode


The VR-3000 implements an Auto Focus function that is able to automatically adjust for changes in an object's height when stitching in the XY directions.

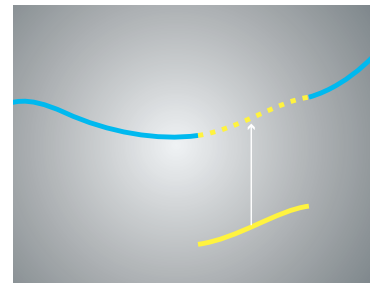

Data recapture

If any area is not originally captured when stitching, it is possible to re-scan only those specific locations, without having to re-scan the entire part again.

Functions as both a 3D measurement system and microscope

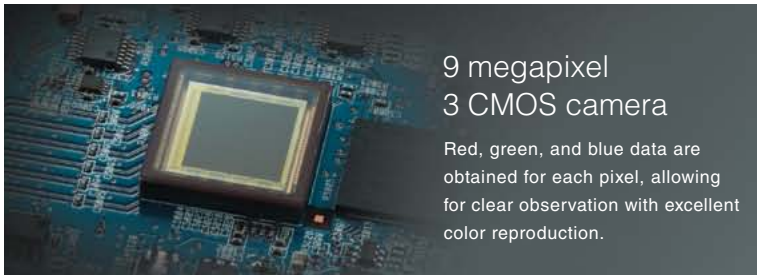

9 megapixel
3 CMOS camera

Red, green, and blue data are obtained for each pixel, allowing for clear observation with excellent color reproduction.

High-definition imaging

9 megapixel 3 CMOS camera

Samples can be imaged under magnifications ranging from 12x to 160x. High resolution images of up to 9 megapixels can be captured and saved by simply pushing the Capture button.


<p>8-bit (256-color) Conventional method</p> <p>With one click the system will capture additional color data by varying the shutter speed</p>	<p>16-bit (65,536-color) HDR function</p> <p>256 times more levels of color than a conventional device</p>
<p>PROBLEMS</p> <ul style="list-style-type: none"> • Reflective samples cannot be imaged clearly due to the limited levels of color that can be captured. • Details in low contrast samples cannot be seen. 	<p>EFFECTS</p> <ul style="list-style-type: none"> • By increasing the levels of color gradation, samples with bright spots or dark spots can be imaged clearly. • Low contrast samples can be seen in high-detail.

See more details than conventional systems




16-bit HDR function

The VR-3000 is able to capture up to 16 bits of red, green, and blue color data to perform significantly more accurate imaging of a sample than what can be captured with traditional 8-bit devices.

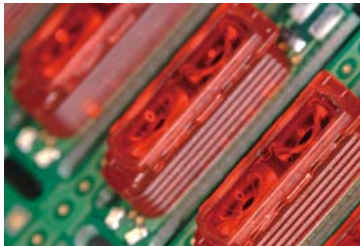

Conventional microscopes


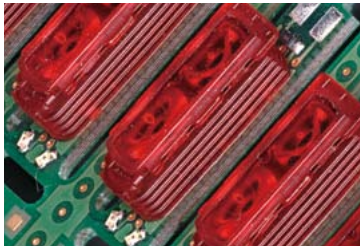


VR-3000 Series PCB (12x)


Built-in depth composition function

When analyzing samples with a large change in height, or when increasing the magnification, the depth-of-field can become limited. The VR-3000's telecentric lenses and depth composition function make it possible to adjust the image so that the entire surface is in focus.


Automotive/Metal/Tooling

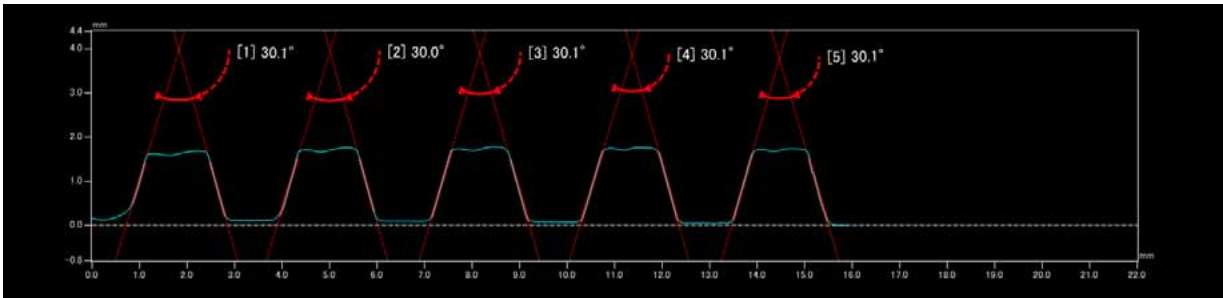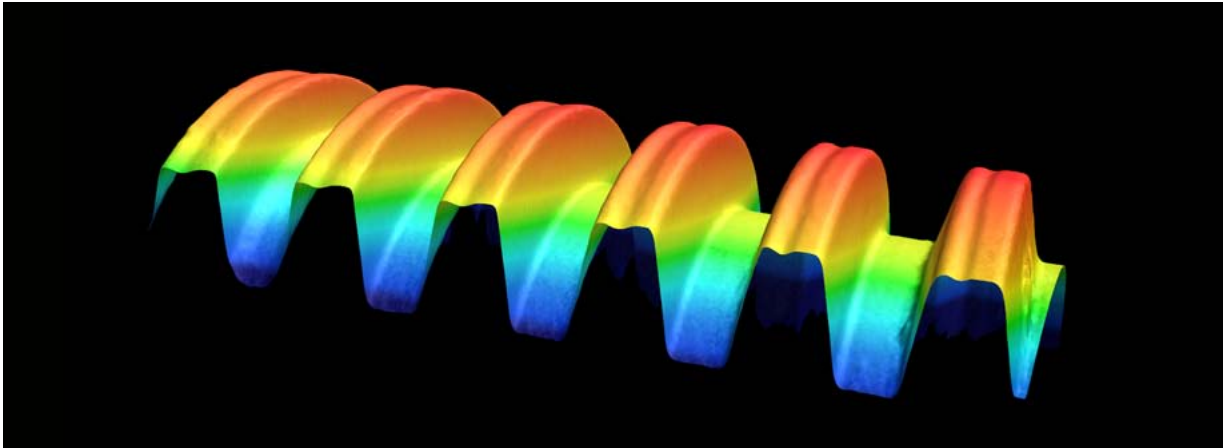


Trapezoidal screw (screw threading and angle)

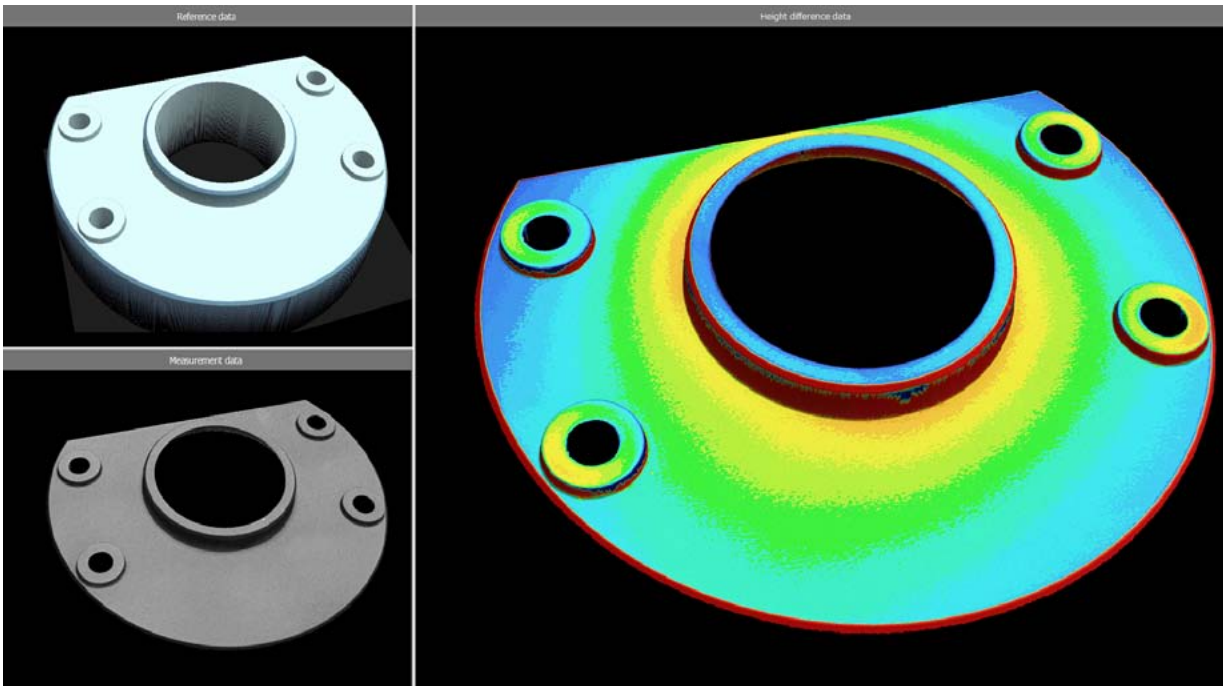


Metal retaining material (compared with 3D-CAD data)

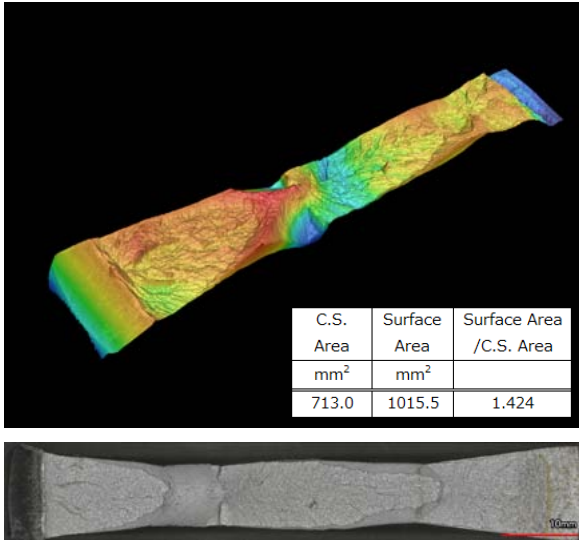

Ductile metal fracture surface (surface area/sectional area)



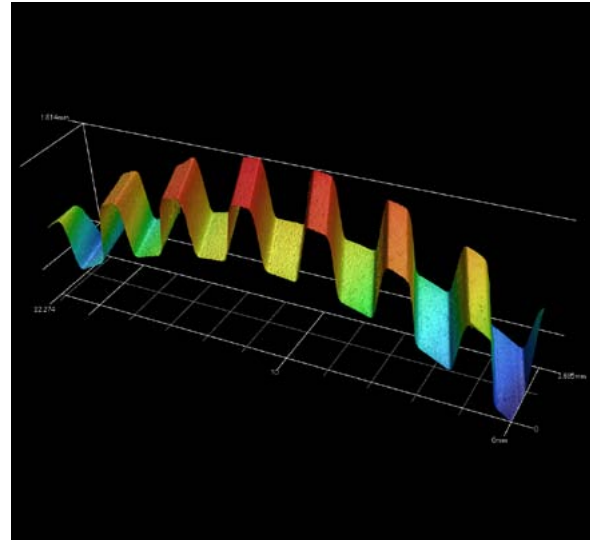


Gear (shape)

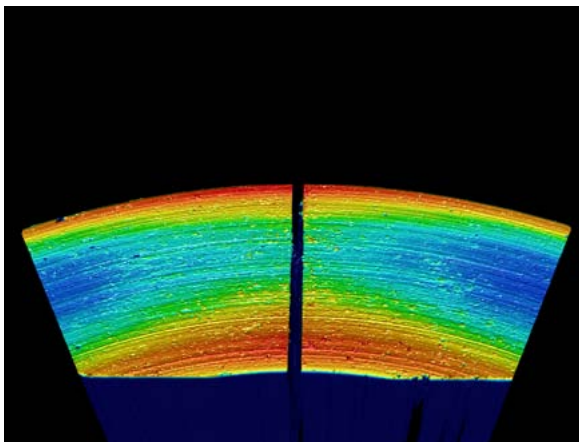


Area	Height Difference	Max. Height	Min. Height	Max.-Min.
Unit	mm	mm	mm	mm
Brake surface	-0.234	0.085	-5.478	5.563

Brake pads (planarity)

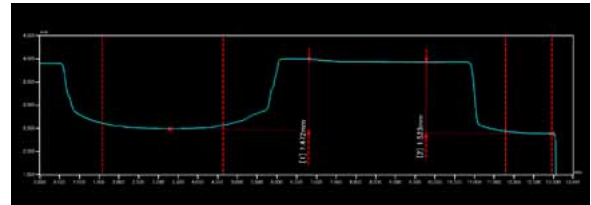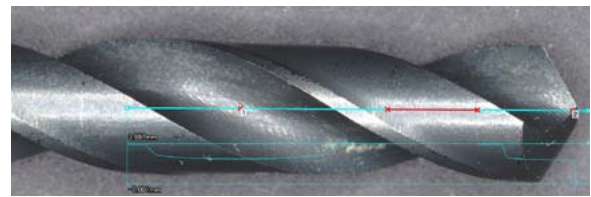
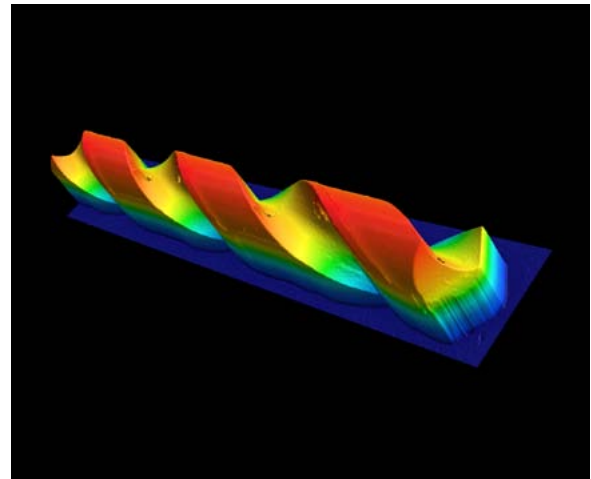


Tool blade edge (shape)


Electrical/Electronics

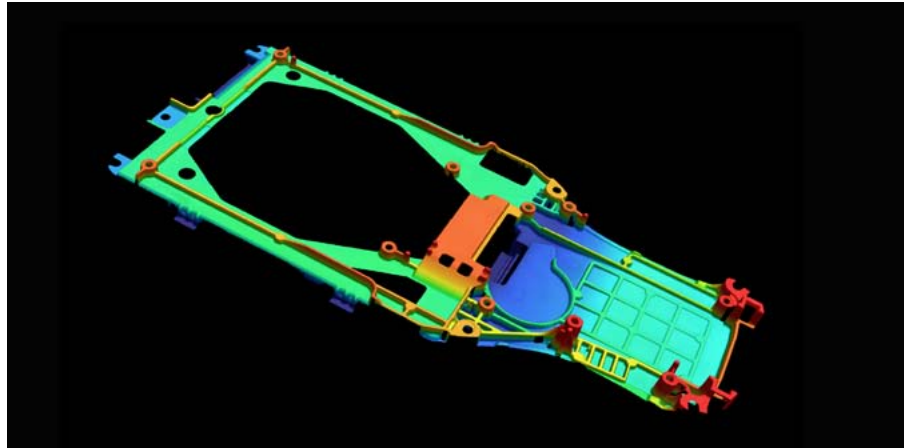


Handy terminal (frame warpage)

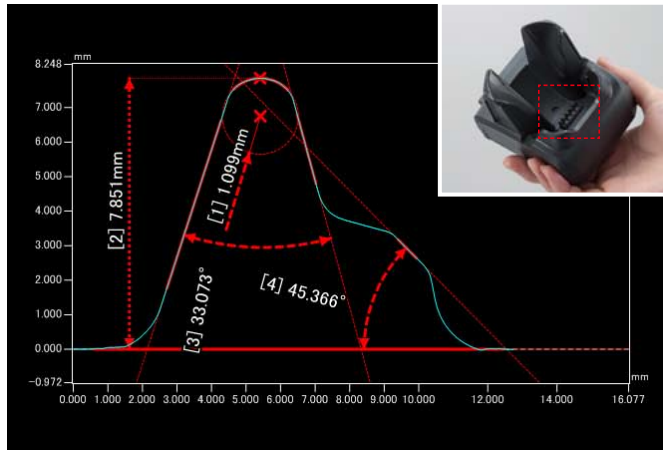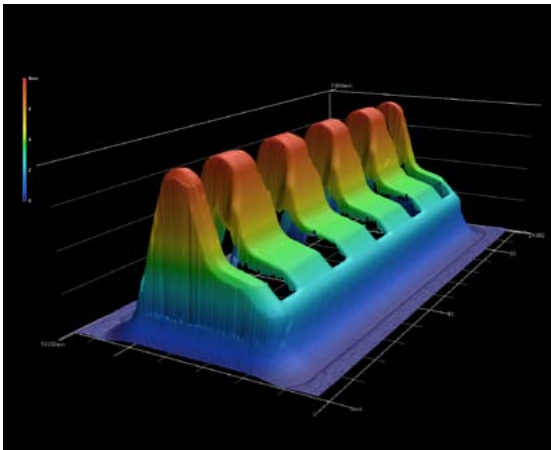


Handy terminal charging stand (shape)

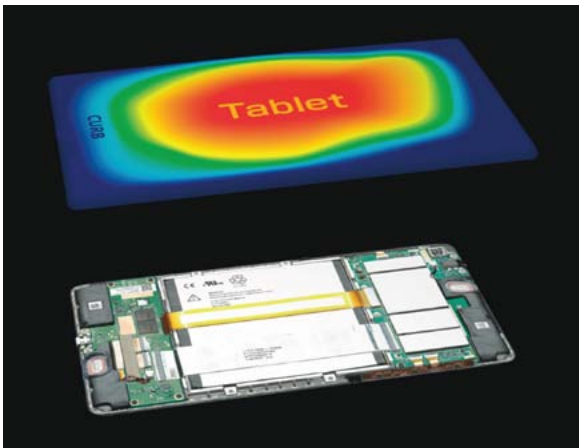


7-inch tablet (case waviness)

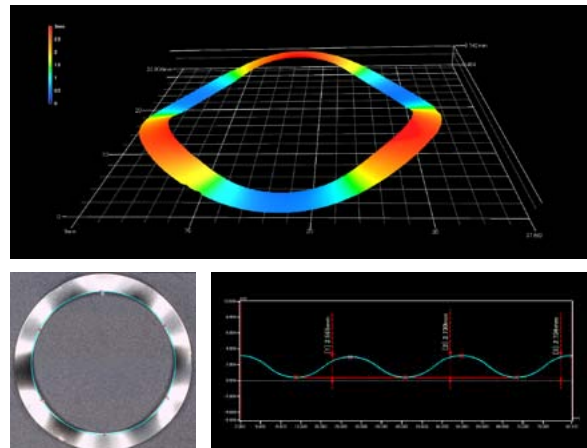


Wave washer (height difference)

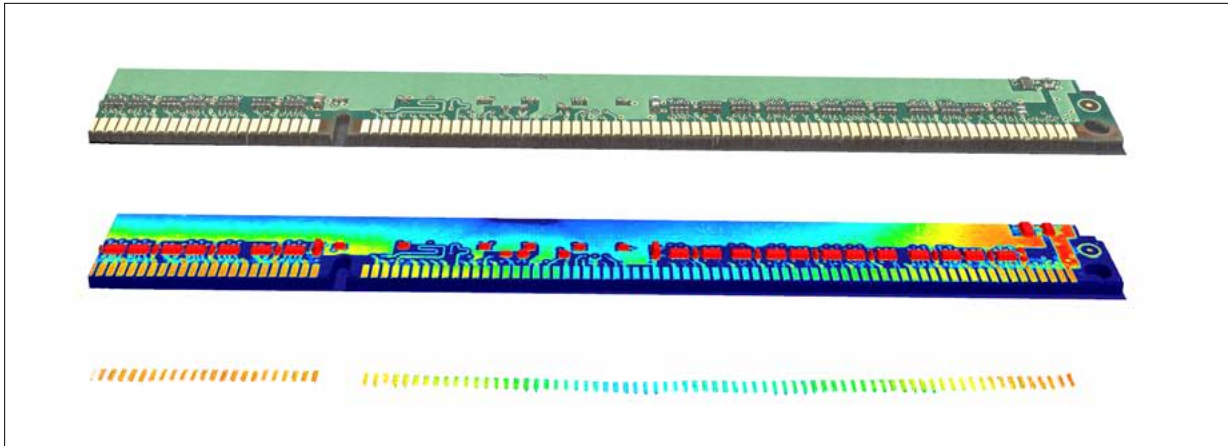


PCB (appearance, overall curvature, plating waviness)

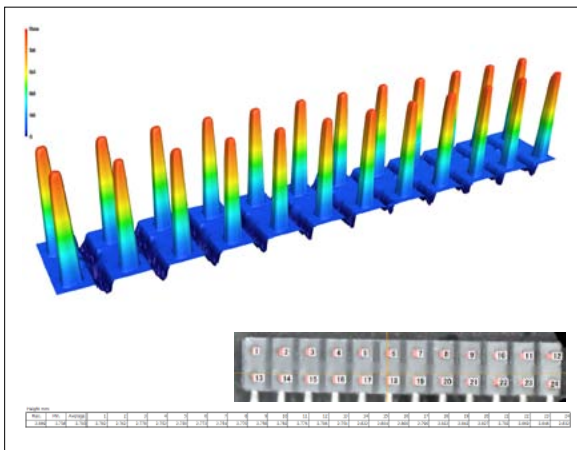

Connector pins (pin height)

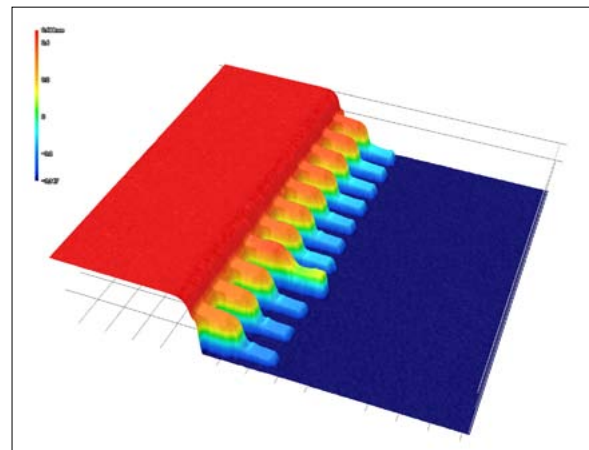

IC (lead float)

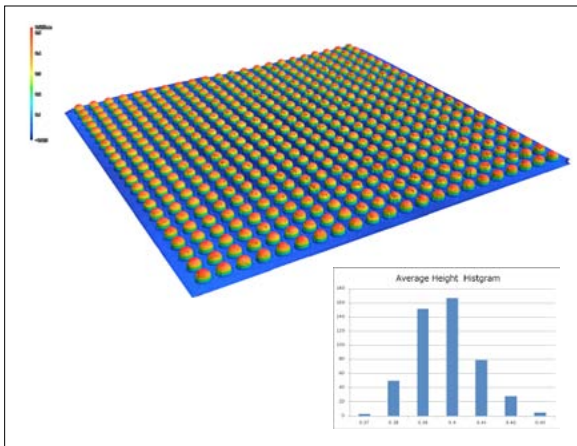

BGA (fluctuations in height)




Metal components (waviness, 2D measurements)

Chemical/Plastic




Rubber handle (Defect analysis)

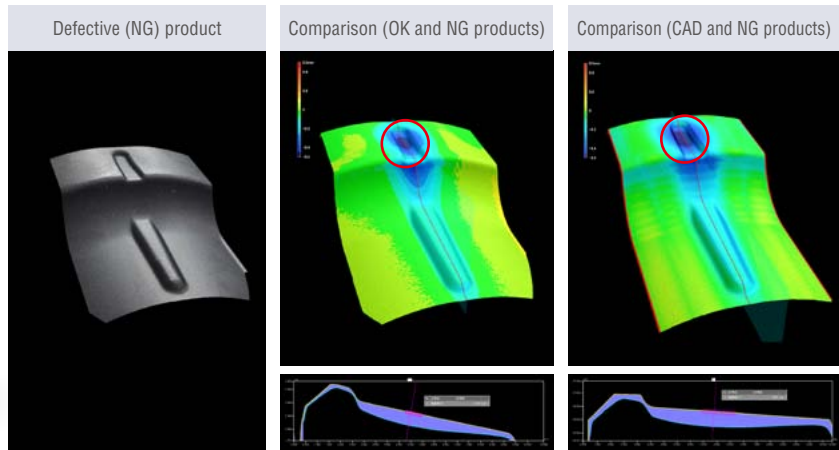


Comparative measurement function


3D-CAD comparative measurement function

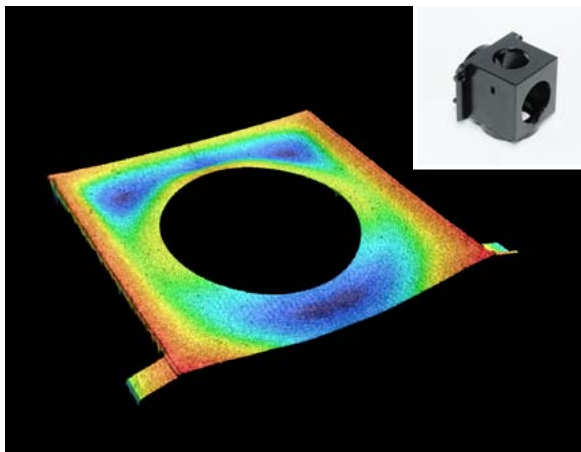


Optical component (resin mold sink marks)

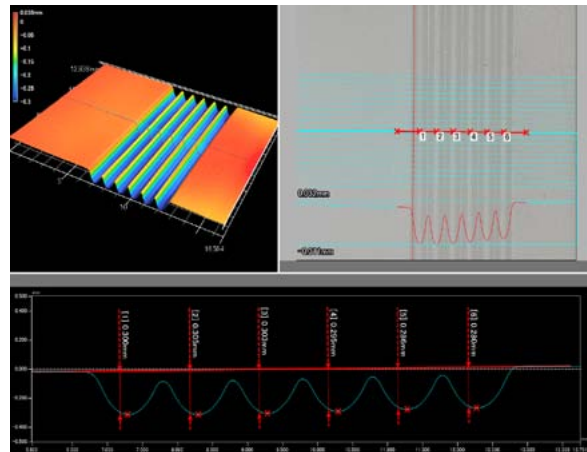

Plastic case (average groove depth)

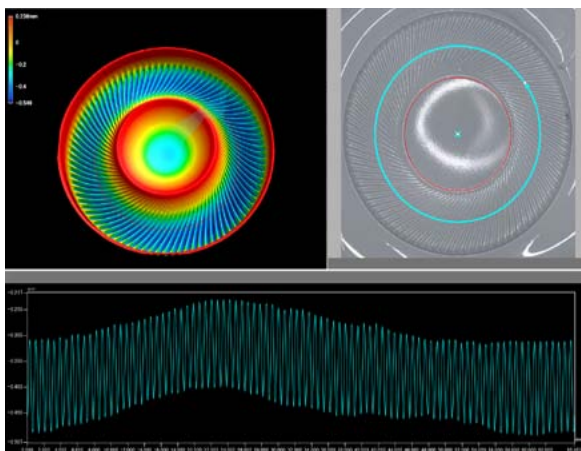


Diaphragm (shape, distortion)

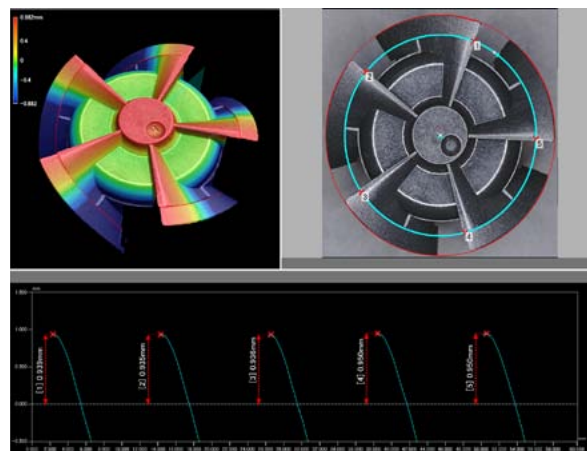


Fan (height from reference)


Other

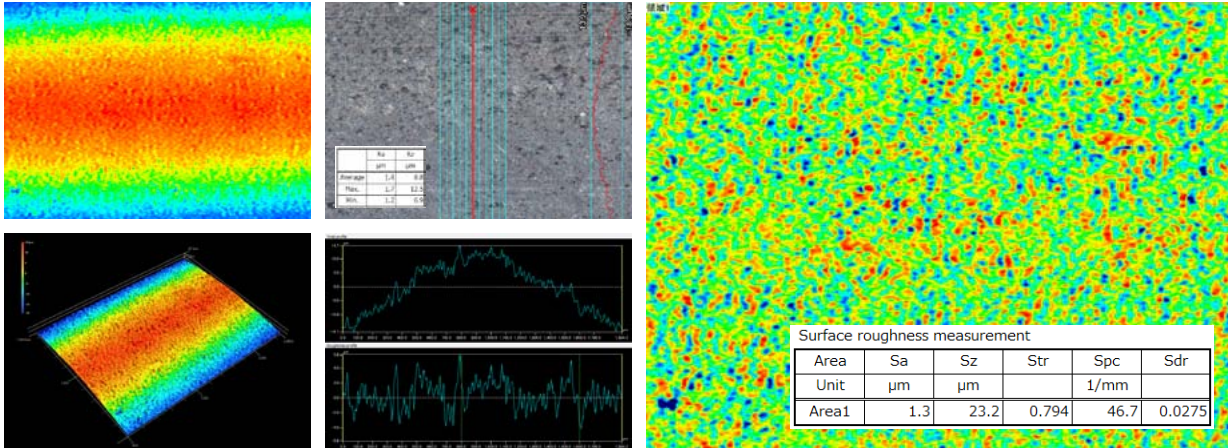


Weather-stripping (line roughness, surface roughness)

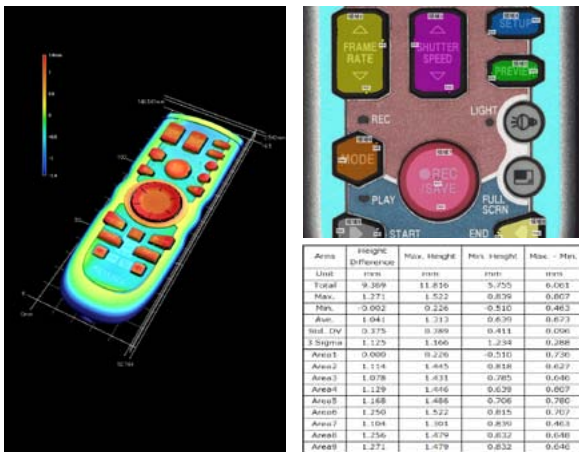


Handheld controller (button height)

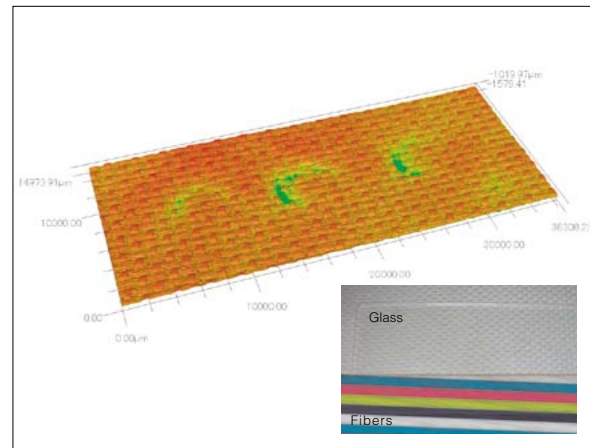

Dents formed between fibers
(Measured while fibers are being pressed with a glass plate.)

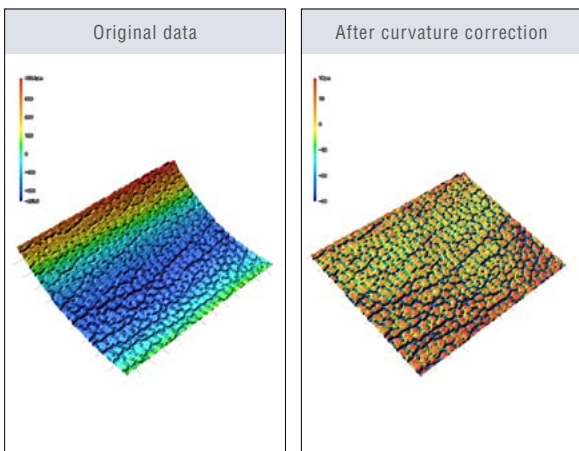

Grain (overall grain depth)

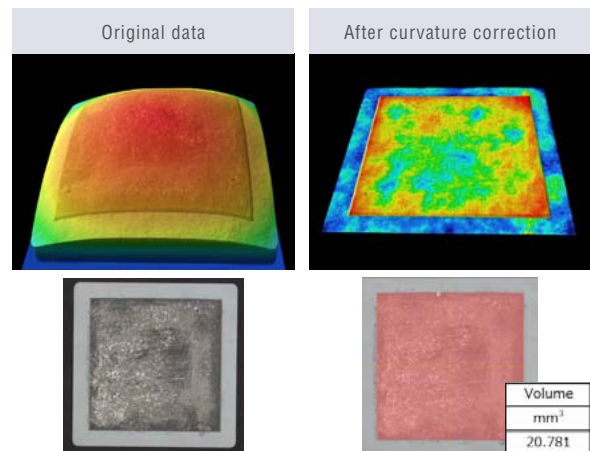

SOFC (solid oxide fuel cell) (volume)

**High-end model with
motorized XY stage
VR-3200**

XY-axis motorized control

Z-axis motorized control

Color imaging

Wide-field/
high-magnification camera



**Standard model with
color/high-magnification
imaging capabilities
VR-3100**

XY-axis manual control

Z-axis motorized control

Color imaging

Wide-field/
high-magnification camera




**Basic model
VR-3050**

Z-axis manual control

Wide-field camera

OP-87708 100 mm 3.94" Spacer

Inserting this 100 mm 3.94" high spacer between the measurement unit and the base allows you to measure objects up to 188 mm 7.40" * in height. This extra space can be also used for setting a heated stage or custom fixture.

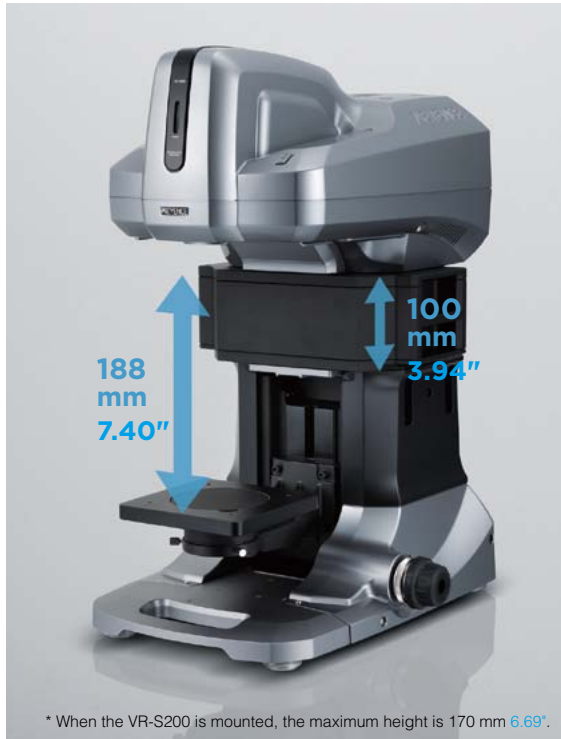


OP-87709 Tilt stage

This stage allows users to observe and measure objects from an angle without having to manipulate the object by hand. The stage is designed so that the sample securely adheres to the stage when positioned at an angle.



OP-87717 Manual slider for image stitching

The manual slider allows measurement of a wider field, up to 270 mm 10.63", when used together with the Stitching Module (optional).

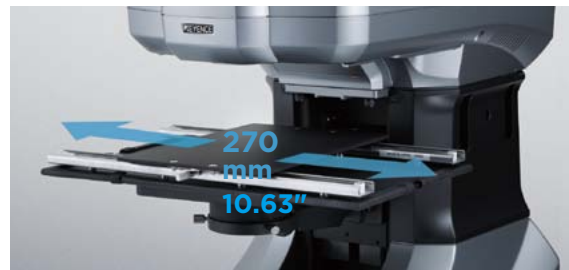

VR-S200 Motorized XY stage

Fully-motorized XY control using the mouse. Combined with the Stitching Module (optional), this stage enables the system to perform image stitching with higher speed and accuracy.



Custom stages


KEYENCE offers a variety of large-sized or special stages to meet your needs. Contact us for more details.






Model	Controller	VR-3000K		
	Head	VR-3200	VR-3100	VR-3050
Motorized XY stage	VR-S200	Standard	Optional	Optional
XYθ stage	OP-87715	—	Standard	Optional
Manual slider for stitching	OP-87717	—	Optional	Optional
100 mm 3.94" spacer	OP-87708	Optional	Optional	Optional
Tilt stage	OP-87709	Standard	Standard	Optional
Calibration standard	OP-87710	Standard	Standard	Standard
[NEW] Viewer software	VR-H2VE	Required	Required	Required
[NEW] Analyzer software	VR-H2AE	Required	Required	Required
[NEW] Stitching module	VR-H2J	Optional	Optional	Optional
[NEW] Comparative measurement module	VR-H2P	Optional	Optional	Optional
[NEW] 3D-CAD comparative module	VR-H2CA	Optional	Optional	Optional

Head VR-3200

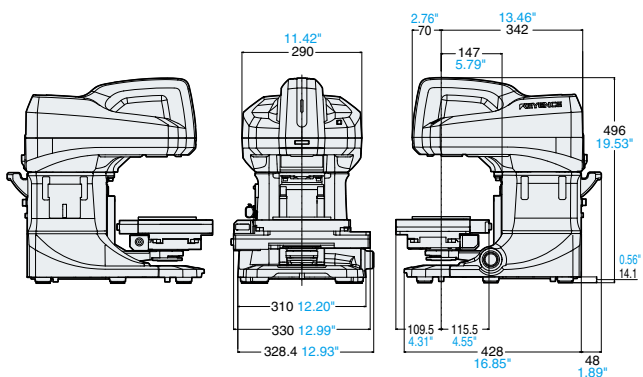


Motorized XY stage VR-S200


Unit: mm inch

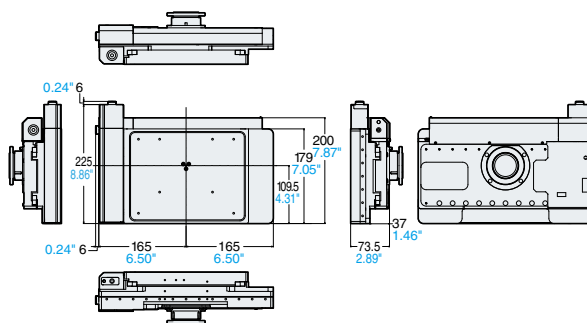



Head VR-3100

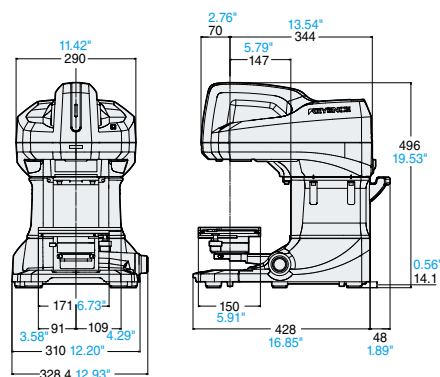

Head VR-3050

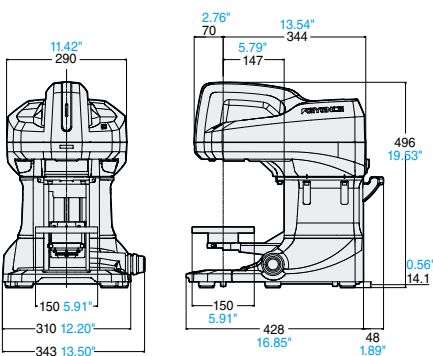

Controller VR-3000K

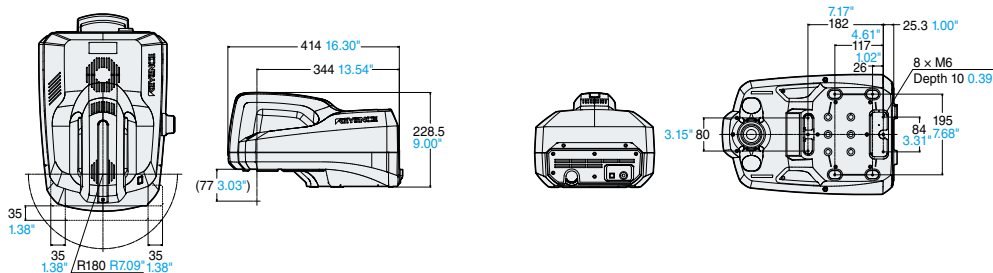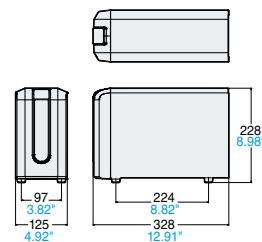

■ VR Head/Controller

Model	Controller Head	VR-3000K																							
		VR-3200								VR-3100								VR-3050							
		Wide-field mode				High magnification mode				Wide-field mode				High magnification mode				Wide-field mode							
Magnification on a 15" monitor		12x	25x	38x	50x	40x	80x	120x	160x	12x	25x	38x	50x	40x	80x	120x	160x	12x	25x	38x	50x				
Field-of-view	Horizontal (H): mm inch	24.0 0.94"	12.0 0.47"	8.0 0.31"	6.0 0.24"	7.6 0.30"	3.8 0.15"	2.5 0.10"	1.9 0.07"	24.0 0.94"	12.0 0.47"	8.0 0.31"	6.0 0.24"	7.6 0.30"	3.8 0.15"	2.5 0.10"	1.9 0.07"	24.0 0.94"	12.0 0.47"	8.0 0.31"	6.0 0.24"				
	Vertical (V): mm inch	18.0 0.71"	9.0 0.35"	6.0 0.24"	4.5 0.18"	5.7 0.22"	2.9 0.11"	1.9 0.07"	1.4 0.06"	18.0 0.71"	9.0 0.35"	6.0 0.24"	4.5 0.18"	5.7 0.22"	2.9 0.11"	1.9 0.07"	1.4 0.06"	18.0 0.71"	9.0 0.35"	6.0 0.24"	4.5 0.18"				
Zoom		1x to 4x																							
Measurable height *1		10 mm 0.39" (±5 mm ±0.20")				1 mm 0.04" (±0.5 mm ±0.02")				10 mm 0.39" (±5 mm ±0.20")				1 mm 0.04" (±0.5 mm ±0.02")				10 mm 0.39" (±5 mm ±0.20")							
Standard scale *2		0.1 μm																							
Repeatability (σ) *3	Height measurement	0.5 μm																							
	Width measurement	1 μm				0.5 μm				1 μm				0.5 μm				1 μm							
Measurement accuracy *3	Height measurement	±3 μm																							
	Width measurement	±5 μm				±2 μm				±5 μm				±2 μm				±5 μm							
Stitching function *4		Full automatic (XY stage automatic control + auto focus) measurement								Manual (XY, Z)															
		Auto adjustment, Auto template analysis								-															
Stage	XY stroke	184 × 88 mm 7.24" × 3.46" (motorized)								70 mm 2.76" *5 (200 mm *6) (manual)															
	Z stroke	90 mm 3.54" (motorized)								90 mm 3.54" (motorized)				88 mm 3.46" (manual)											
	Rotation	±180° (sample rotating stage)								±90°(θ stage)															
	Tilt	±30° or more								±30° or more															
Working distance		75 mm 2.95"																							
Image receiving element		4 megapixel monochrome CMOS																							
Transmitter lens		Two, double-telecentric lenses																							
Receiver lens		Double-telecentric lens																							
Light sources	Observation light source	LED ring light (red, green, blue)																LED ring light (white)							
	Measurement light source	White LED																							
Image size		1024 × 768 pixels, 2048 × 1536 pixels																							
Data processing		Dedicated PC specified by KEYENCE (OS: Windows 7) *7																							
Power source	Supply voltage	100 to 240 VAC ±10%, 50/60 Hz																							
	Power consumption	150 VA																							
Environmental resistance	Ambient temperature for usage	15 to 30°C 59 to 86°F																							
	Relative humidity for usage	35 to 80% (no condensation)																							
Weight	Controller	28.0 kg								3.8 kg								22.5 kg				20.6 kg			
	Head *8																								

*1 Wide-field ±5 mm ±0.20" and high magnification ±0.5 mm ±0.02" around the focal point position. *2 Height measurement resolution.
 *3 Value obtained using KEYENCE's specified standard gauge with measurement in KEYENCE's specified measurement mode (ambient temperature: 23±1°C 73.4±1.8°F). *4 The stitching module (VR-H2J) is required.
 *5 The VR-3050 requires the XY9 stage (OP-87715). *6 When the OP-87717 manual slider for stitching used.
 *7 Windows 7 Professional and Ultimate. *8 Weight of measurement unit: 10.8 kg

■ Motorized XY stage VR-S200

Travel speed	10 mm 0.39"/sec (max.)
Travel range	184 × 88 mm 7.24" × 3.46"
Stage size	Top surface: 215 × 165 mm 8.46" × 6.50" (rotary plate: ø140 mm ø5.51")
Weight	6.5 kg



* Optional item mountable on VR-3100 or VR-3050.

First-class customer support that only a direct service system can provide

KEYENCE employs a direct sales system that eliminates intermediaries, such as distributors and dealers, from our sales channel.

Our experienced, highly-skilled sales engineers respond quickly to customers' inquiries, providing them with exceptional after-sales service and support.

KEYENCE also offers free on-site inspection services and provides equipment loans free of charge in the event of a failure. With this level of service, KEYENCE provides post-sales support you can rely on.

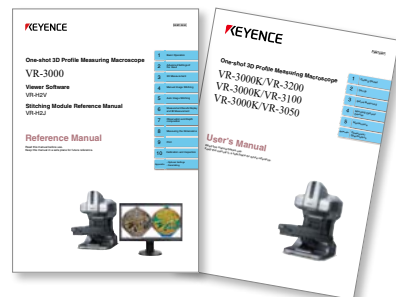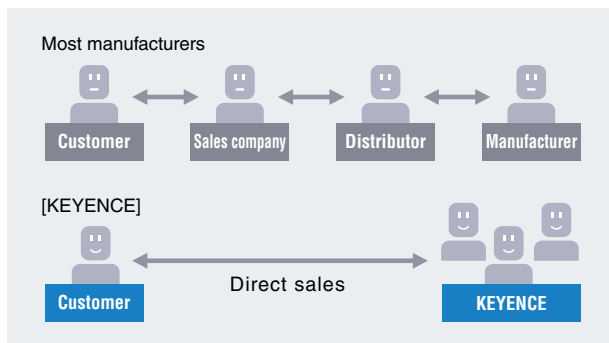


In addition to the "Getting Started Guide" provided with the product, a full color manual is also available.

Automatically Analyze and Differentiate 3D Surfaces

3D LASER SCANNING CONFOCAL MICROSCOPE VK-X250/X150/X120

- || Non-contact, ultra high-accuracy 3D measurement
- || 60x - 28800x magnification range
- || Fully-automated measurements with just one click
- || Works on any surface shape regardless of material
- || Process multiple files at once for faster results
- || Easily evaluate up to 42 different roughness parameters

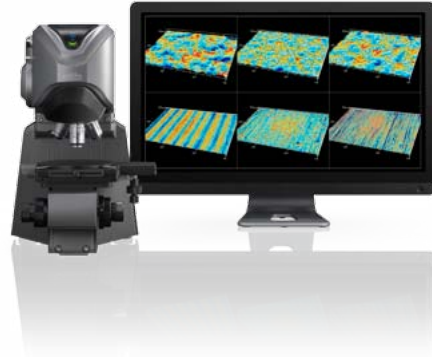

The New Standard for Microscopes

DIGITAL MICROSCOPE VHX-5000

- || All-in-one microscope that incorporates observation, image capture and measurement capabilities
- || Depth-of-field 20 times greater than optical microscopes
- || Motorized XYZ controls for simplified operation
- || Instantly view any area entirely in focus
- || Intuitive user interface allows everyone to perform analysis easily
- || Advanced 2D and automated area measurement functions



KEYENCE

**CALL
TOLL
FREE**

TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

KEYENCE CORPORATION OF AMERICA

Corporate Office 669 River Drive, Suite 403, Elmwood Park, NJ 07407 PHONE: 888-539-3623 FAX: 855-539-0123 E-mail: keyence@keyence.com
Sales & Marketing Head Office 1100 North Arlington Heights Road, Suite 210, Itasca, IL 60143 PHONE: 888-539-3623 FAX: 855-539-0123

AL Birmingham	CA San Jose	CO Denver	IN Indianapolis	MI Grand Rapids	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Austin	WI Milwaukee
AR Little Rock	CA Cupertino	FL Tampa	KY Louisville	MN Minneapolis	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
AZ Phoenix	CA Los Angeles	GA Atlanta	MA Boston	MO Kansas City	NC Charlotte	OR Portland	TN Knoxville	VA Richmond	
CA San Francisco	CA Irvine	IL Chicago	MI Detroit	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WA Seattle	

KEYENCE CANADA INC.

Head Office PHONE: 905-366-7655 FAX: 905-366-1122 E-mail: keyencecanada@keyence.com
Montreal PHONE: 514-694-4740 FAX: 514-694-3206 **Windsor** PHONE: 905-366-7655 FAX: 905-366-1122

KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-55-8850-0100 FAX: +52-81-8220-9097
E-mail: keyencemexico@keyence.com

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.

Company and product names mentioned in this catalog are trademarks or registered trademarks of their respective companies.

The specifications are expressed in metric units. The English units have been converted from the original metric units.

Copyright (c) 2016 KEYENCE CORPORATION. All rights reserved.

KA1-1026-1

VR32-KA-C2-US 1026-1