
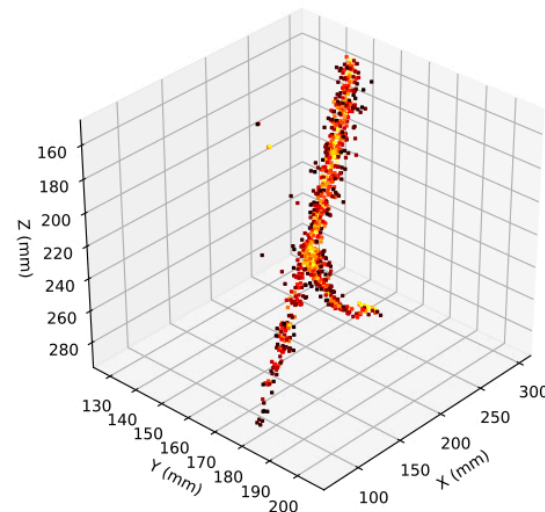


ARIADNE⁺: Large scale demonstration of fast optical readout for dual-phase LArTPCs at the CERN Neutrino Platform

Adam Lowe (University of Liverpool) on behalf of the ARIADNE⁺ collaboration

a.j.lowe@liverpool.ac.uk

NuFACT, August 2022

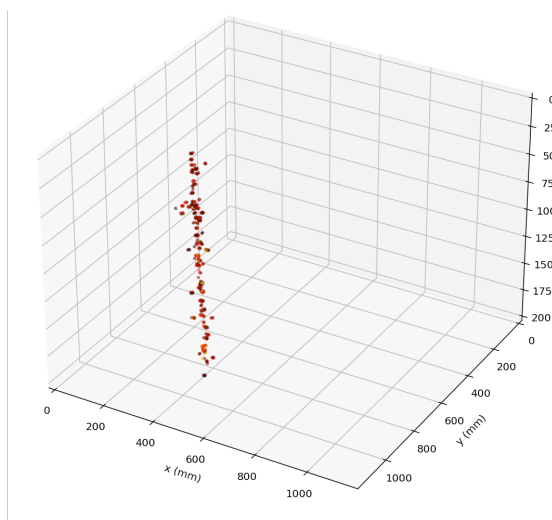

<https://hep.ph.liv.ac.uk/ariadne>

04/08/2022

A.Lowe | ARIADNE⁺ | NuFACT22



Talk Outline



Talk Outline

- Background to the ARIADNE Program



Talk Outline

- Background to the ARIADNE Program
 - Results taken using the 1-tonne dual-phase LAr ARIADNE detector



Talk Outline


- Background to the ARIADNE Program
 - Results taken using the 1-tonne dual-phase LAr ARIADNE detector
- The ARIADNE+ detector at the CERN Neutrino Platform



Talk Outline

- Background to the ARIADNE Program
 - Results taken using the 1-tonne dual-phase LAr ARIADNE detector
- The ARIADNE+ detector at the CERN Neutrino Platform
- Ongoing analysis and outlook


ARIADNE Detection Principle

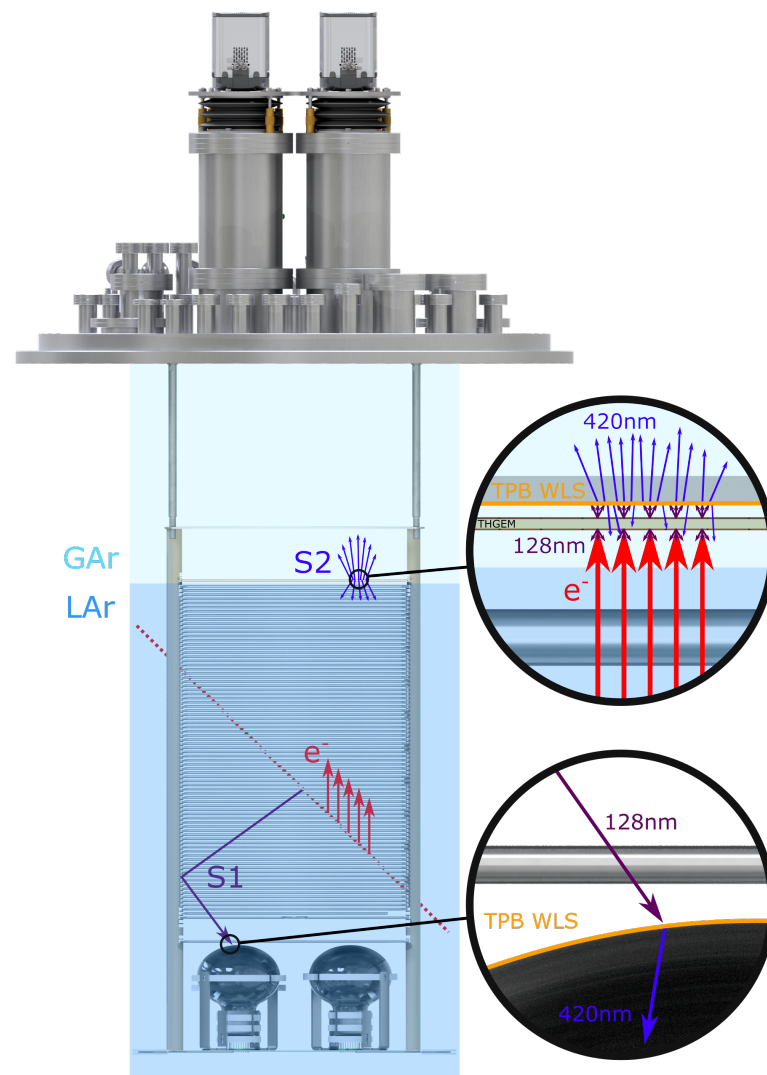

ARIADNE (ARgon ImAGING DetectionN chambEr)

ARIADNE Detection Principle

ARIADNE aims to demonstrate light readout as a viable alternative to charge in dual-phase TPC neutrino experiments

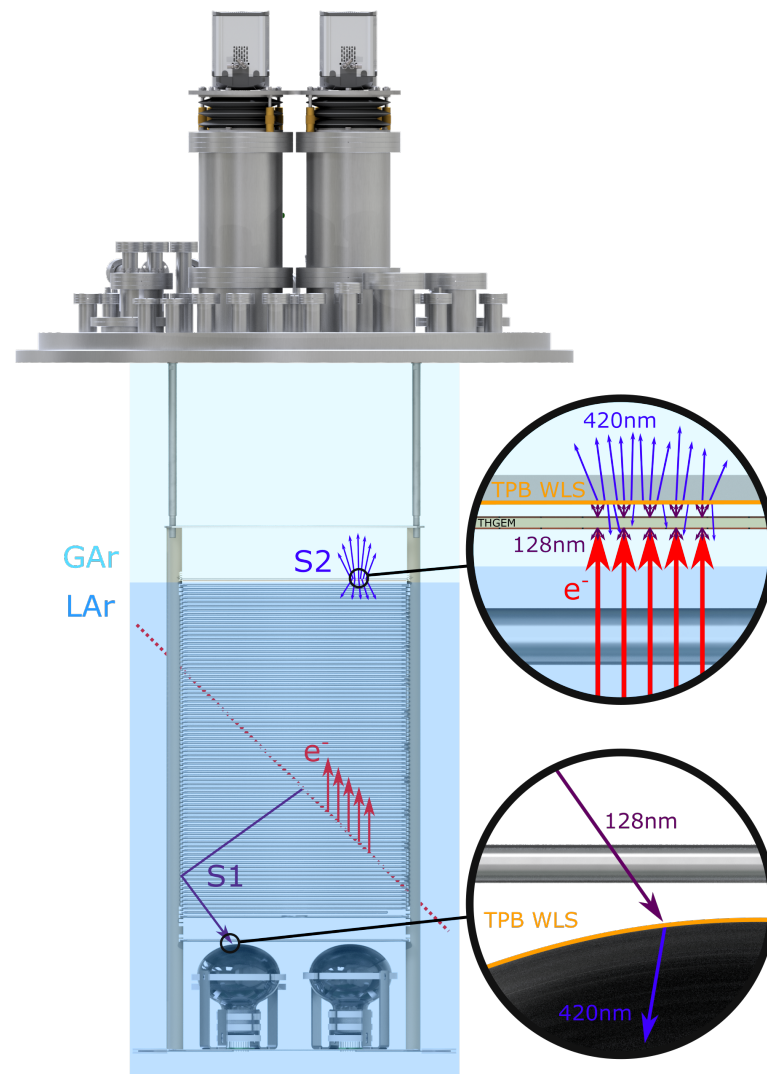


ARIADNE (ARgon ImAGING DetectionN chambEr)

ARIADNE Detection Principle

ARIADNE aims to demonstrate light readout as a viable alternative to charge in dual-phase TPC neutrino experiments

- Incoming particles ionise LAr and create **prompt scintillation light (S1)**

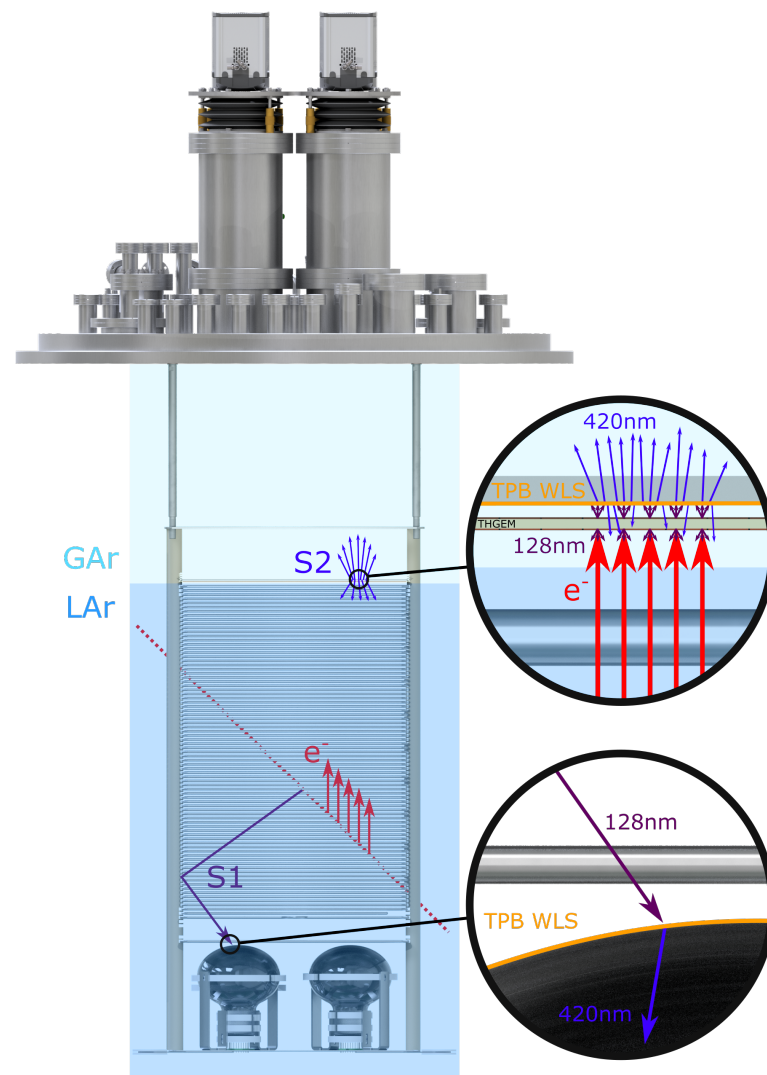


ARIADNE (ARgon ImAGING DetectionN chambEr)

ARIADNE Detection Principle

ARIADNE aims to demonstrate light readout as a viable alternative to charge in dual-phase TPC neutrino experiments

- Incoming particles ionise LAr and create **prompt scintillation** light (**S1**)
- Electrons drift towards the **extraction grid** situated below the liquid level

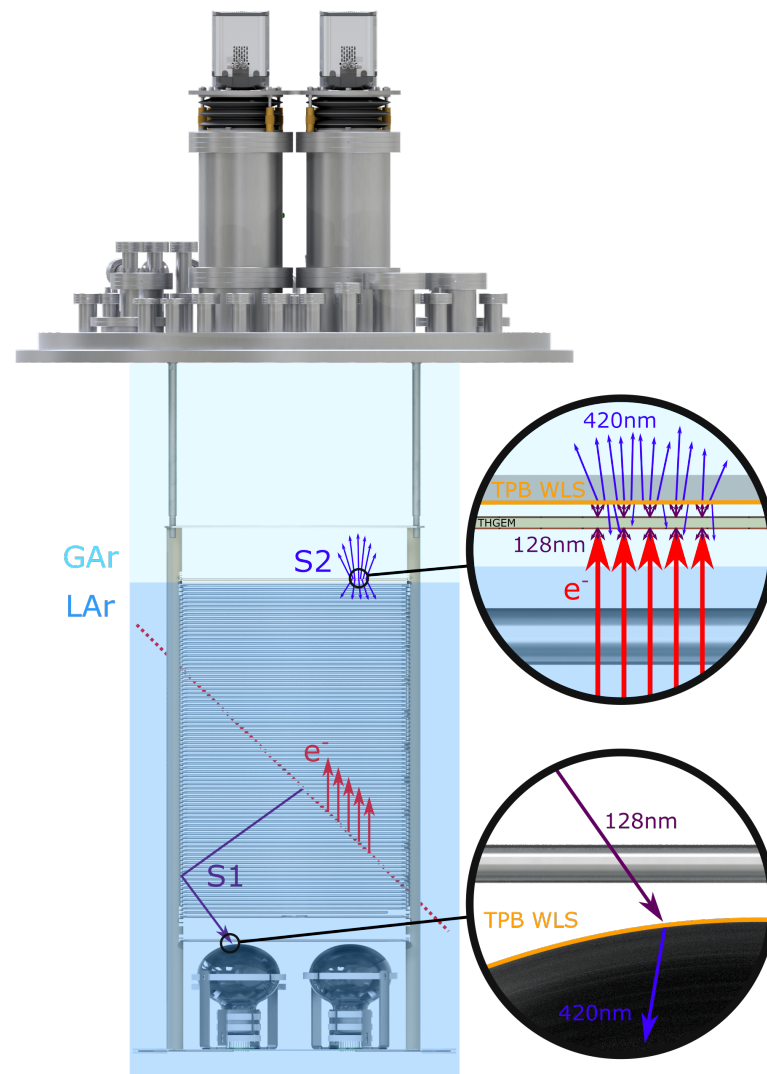


ARIADNE (ARgon ImAGING DetectionN chambEr)

ARIADNE Detection Principle

ARIADNE aims to demonstrate light readout as a viable alternative to charge in dual-phase TPC neutrino experiments


- Incoming particles ionise LAr and create **prompt scintillation** light (**S1**)
- Electrons drift towards the **extraction grid** situated below the liquid level
- A **THGEM** (THick-Gaseous Electron Multiplier) amplifies drift charge (capable of >30 kV/cm in LAr) generating **secondary scintillation** light (**S2**)
- **WLS** (Wavelength Shifting) for an intensifier stage before imaging with Timepix3 camera

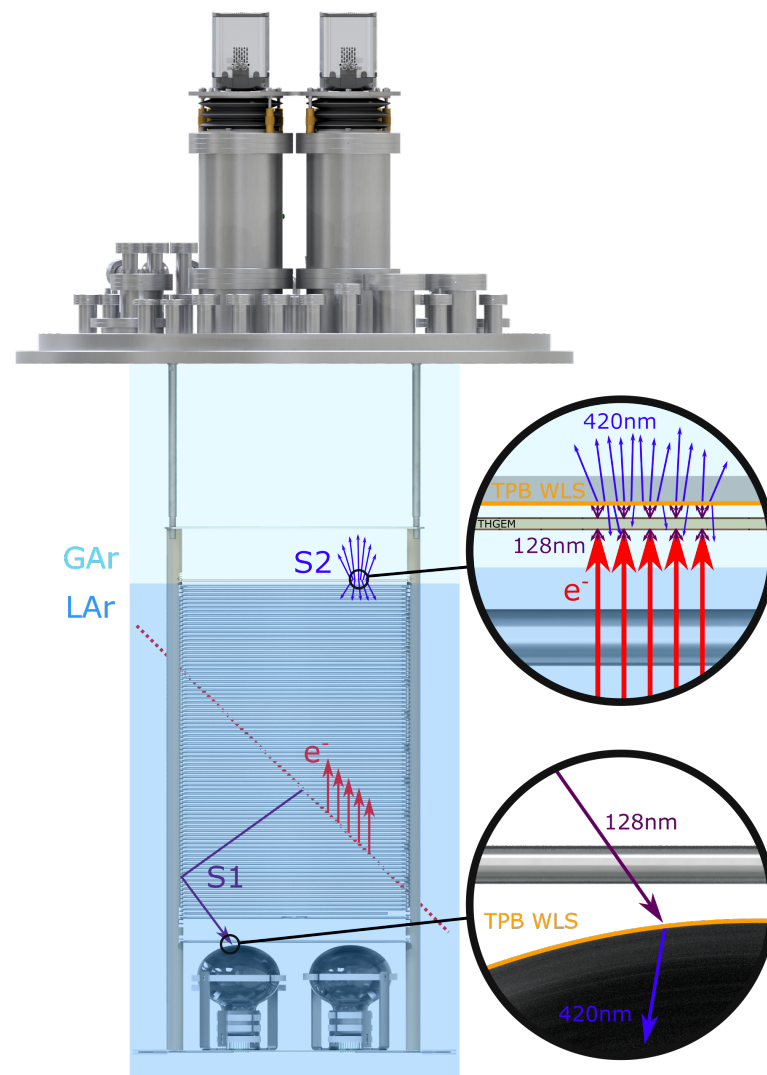

ARIADNE (ARgon ImAGING DetectionN chambEr)


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:

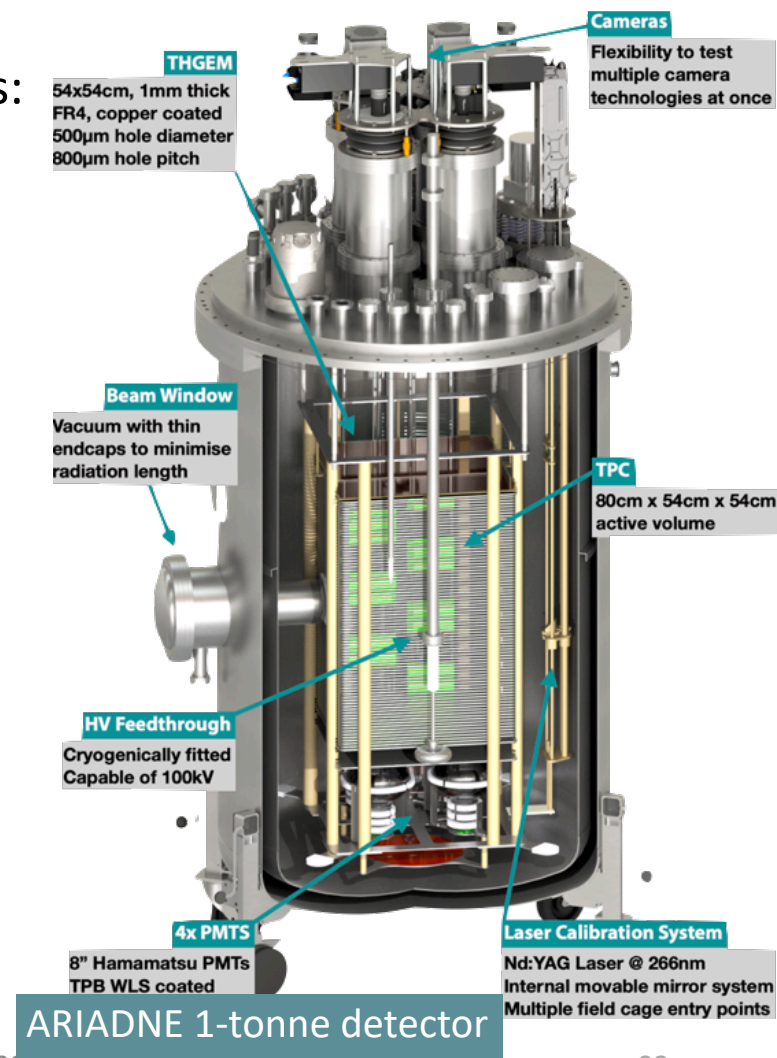


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:
 - **High Resolution:** For e.g. TPX3 camera has 256 x 256 pixels, imaging 35 x 35 cm area, as on ARIADNE, gives ≈ 1 mm resolution

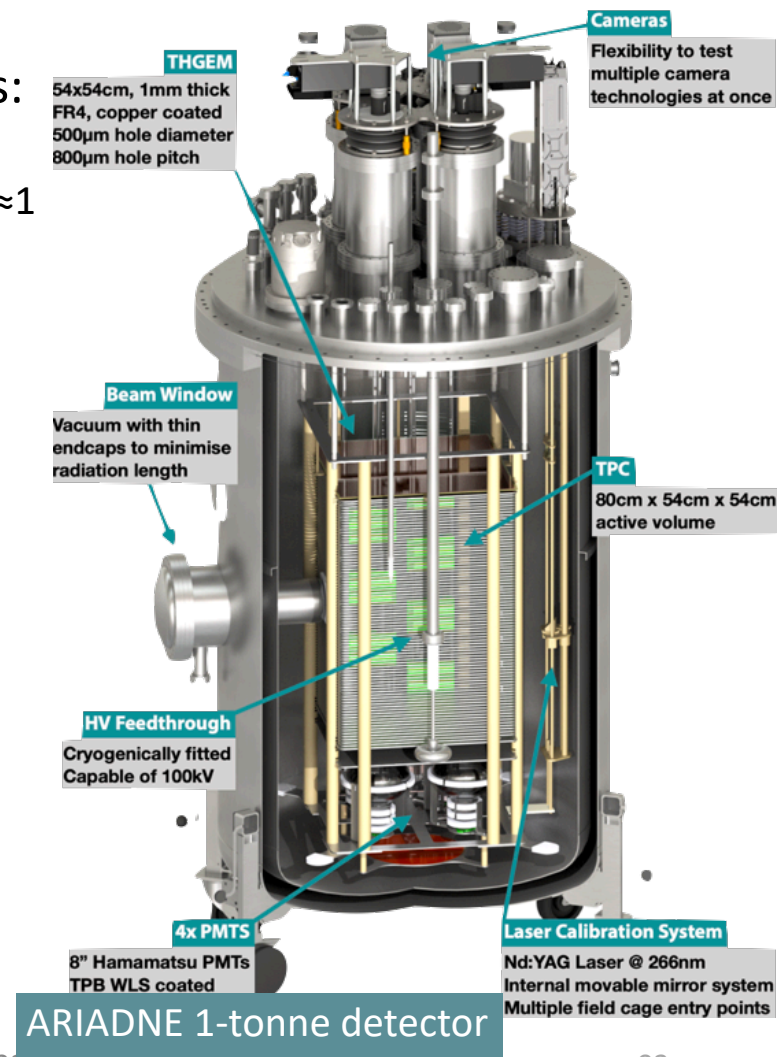


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:
 - **High Resolution:** For e.g. TPX3 camera has 256 x 256 pixels, imaging 35 x 35 cm area, as on ARIADNE, gives ≈ 1 mm resolution
 - **Sensitivity to low energies:** Gain is generated by the THGEM; a THGEM accelerated electron can generate upwards of 100 photons, cameras can be sensitive to single photons

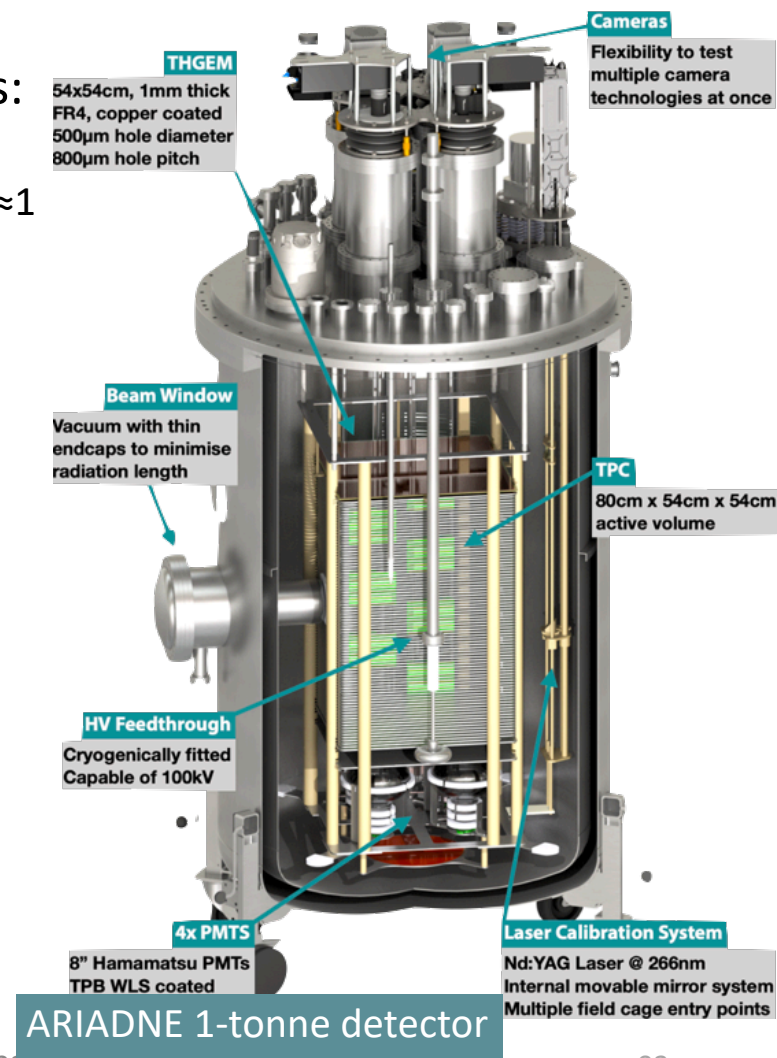


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:
 - **High Resolution:** For e.g. TPX3 camera has 256 x 256 pixels, imaging 35 x 35 cm area, as on ARIADNE, gives ≈ 1 mm resolution
 - **Sensitivity to low energies:** Gain is generated by the THGEM; a THGEM accelerated electron can generate upwards of 100 photons, cameras can be sensitive to single photons
 - **Very low Noise:** Sensors are decoupled from TPC electronics

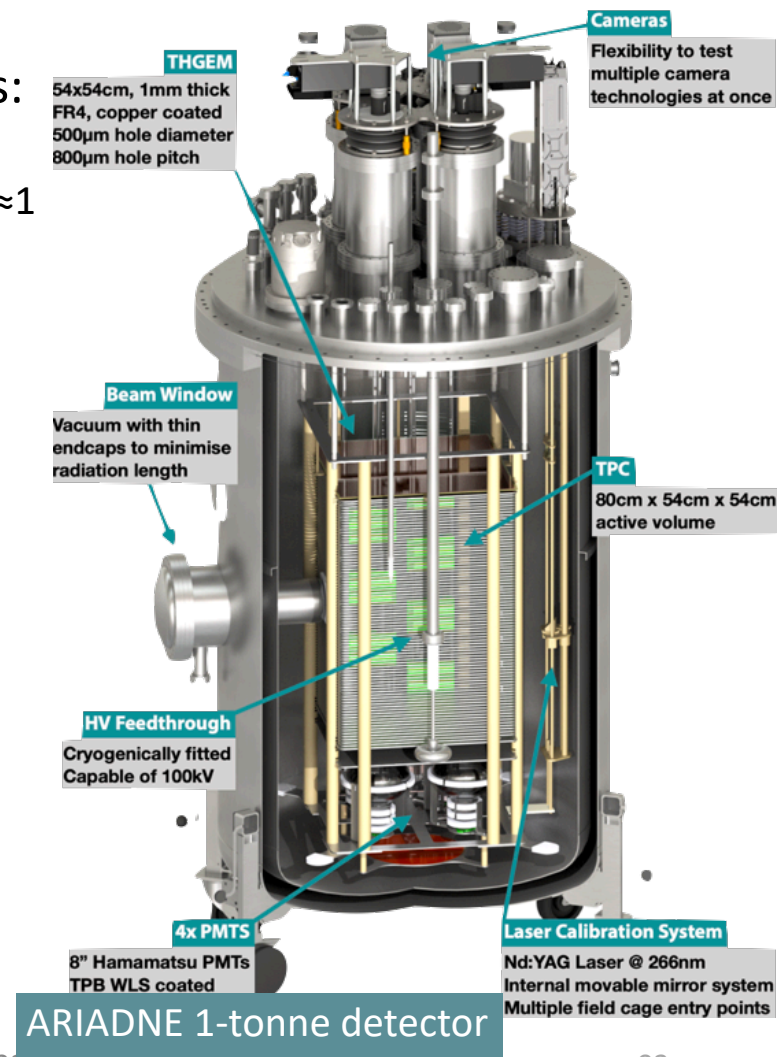


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:
 - **High Resolution:** For e.g. TPX3 camera has 256 x 256 pixels, imaging 35 x 35 cm area, as on ARIADNE, gives ≈ 1 mm resolution
 - **Sensitivity to low energies:** Gain is generated by the THGEM; a THGEM accelerated electron can generate upwards of 100 photons, cameras can be sensitive to single photons
 - **Very low Noise:** Sensors are decoupled from TPC electronics
 - **Ease of Access:** Technology can be swapped in and out even with TPC operating

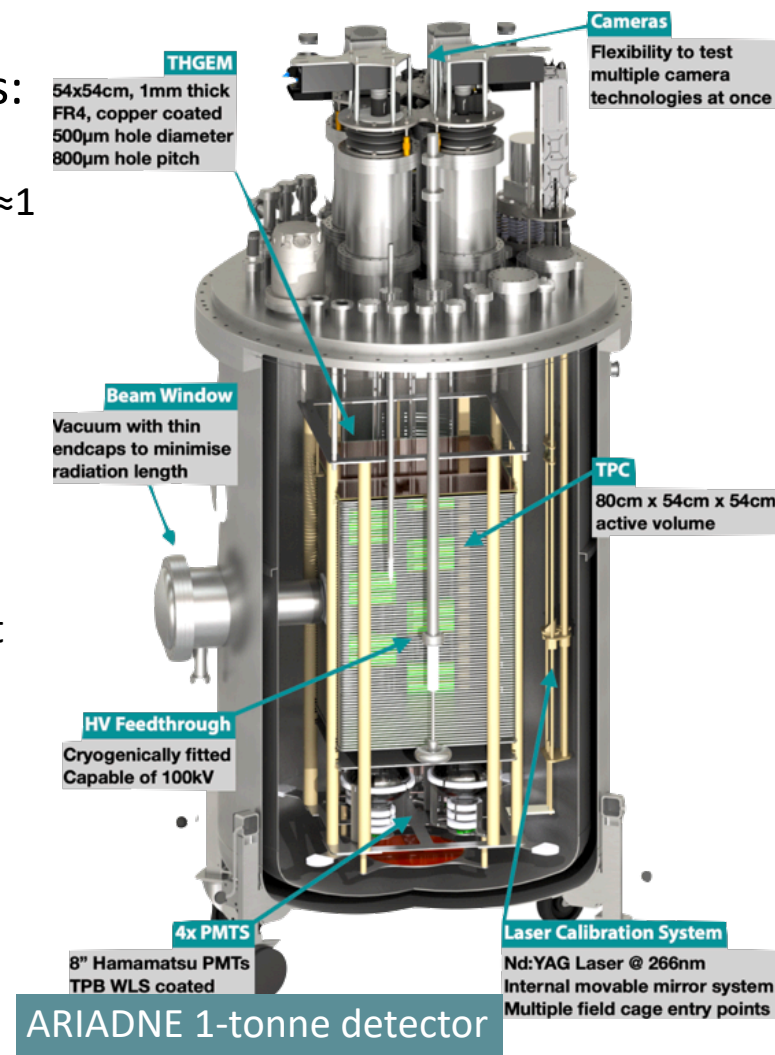


The ARIADNE Advantage - Optical TPCs

- Benefits over previous charge readout methods:
 - **High Resolution:** For e.g. TPX3 camera has 256 x 256 pixels, imaging 35 x 35 cm area, as on ARIADNE, gives ≈ 1 mm resolution
 - **Sensitivity to low energies:** Gain is generated by the THGEM; a THGEM accelerated electron can generate upwards of 100 photons, cameras can be sensitive to single photons
 - **Very low Noise:** Sensors are decoupled from TPC electronics
 - **Ease of Access:** Technology can be swapped in and out even with TPC operating
 - **Cost Efficient:** No need for thousands of internal charge TPC readout channels, pre-amps etc.

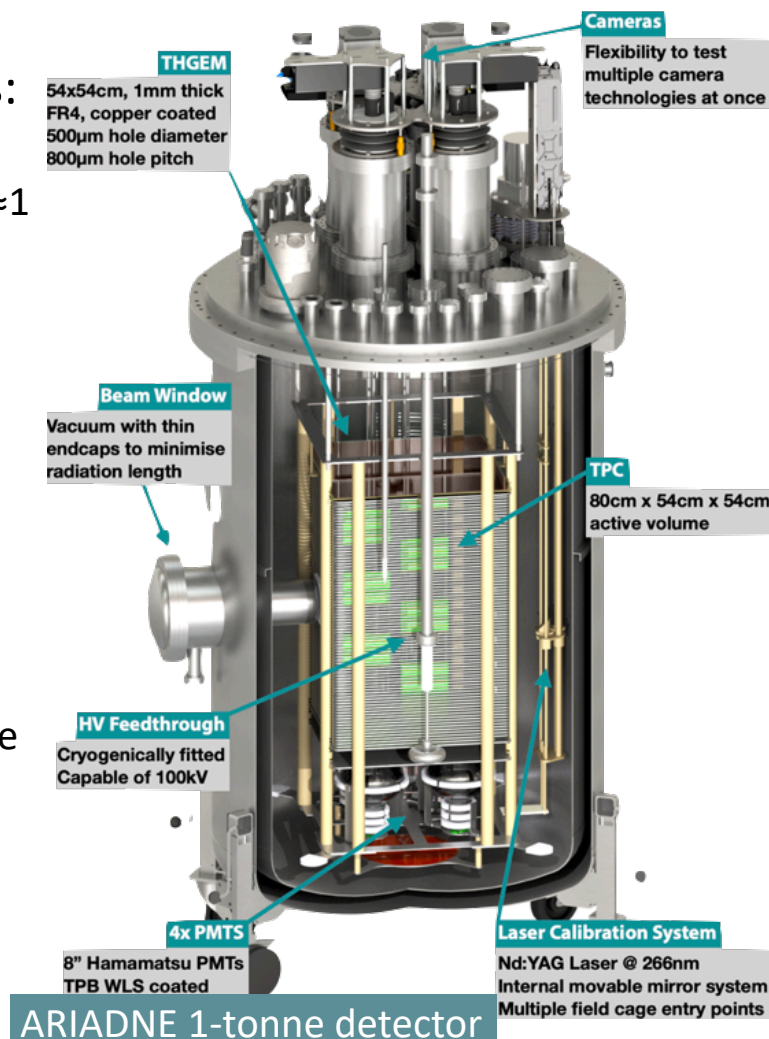

The ARIADNE Advantage - Full 3D optical readout with Timepix3


- Well established technology by the **CERN** Medipix collaboration:

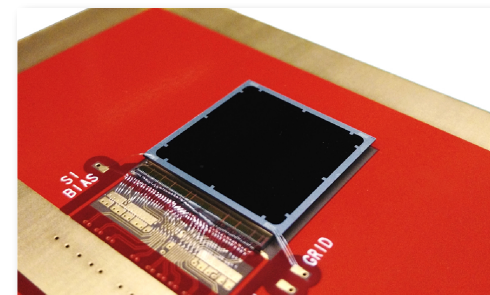

TPX3 ASIC Chip bump bonded to an optical sensor

The ARIADNE Advantage - Full 3D optical readout with Timepix3

- Well established technology by the **CERN** Medipix collaboration:
 - **Natively 3D:** Timepix chip gives X and Y position, Time of Arrival (ToA) (which is equivalent to z position) and Time over Threshold (ToT) (equivalent to intensity)

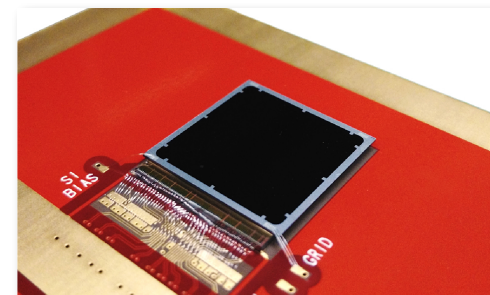


TPX3 ASIC Chip bump bonded to an optical sensor

Sensor resolution	256x256 pixels
Pixel size	55 μ m x 55 μ m
Max readout rate	80Mhits \cdot sec ⁻¹
Time resolution	1.6 ns
Time over Threshold Resolution	10 bit


The ARIADNE Advantage - Full 3D optical readout with Timepix3

- Well established technology by the **CERN** Medipix collaboration:
 - Natively 3D:** Timepix chip gives X and Y position, Time of Arrival (ToA) (which is equivalent to z position) and Time over Threshold (ToT) (equivalent to intensity)
 - Zero Background Suppression:** Data driven readout based on hits rather than frame

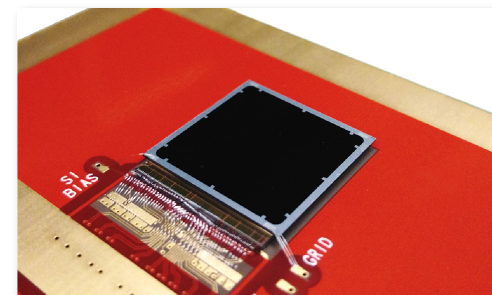


TPX3 ASIC Chip bump bonded to an optical sensor

Frame-based Readout
(EMCCDs)



Events



Data-driven Readout
(TPX3CAM)




Sensor resolution	256x256 pixels
Pixel size	55μm x 55μm
Max readout rate	80Mhits•sec ⁻¹
Time resolution	1.6 ns
Time over Threshold Resolution	10 bit

03


The ARIADNE Advantage - Full 3D optical readout with Timepix3

- Well established technology by the **CERN** Medipix collaboration:
 - Natively 3D:** Timepix chip gives X and Y position, Time of Arrival (ToA) (which is equivalent to z position) and Time over Threshold (ToT) (equivalent to intensity)
 - Zero Background Suppression:** Data driven readout based on hits rather than frame
 - Efficient data storage:** Continuous streaming, triggerless operation - few kBytes per event
 - Technology ready for deployment **now!**

Sensor resolution	256x256 pixels
Pixel size	55 μ m x 55 μ m
Max readout rate	80Mhits \cdot sec ⁻¹
Time resolution	1.6 ns
Time over Threshold Resolution	10 bit

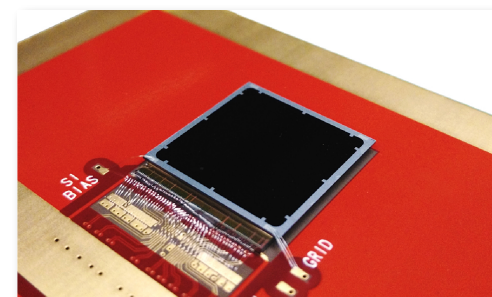

TPX3 ASIC Chip bump bonded to an optical sensor

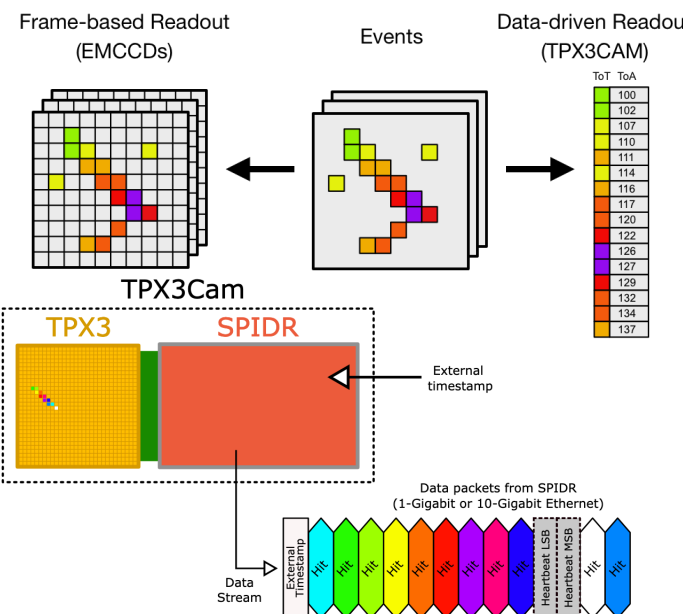

ARIADNE at the T9 Beamline




Timepix3 Mounted to ARIADNE

ARIADNE at the T9 Beamline

3 weeks of EMCCD data taken in 2018

T9 Beamline, East Area, CERN

Mix of particles: e^\pm , μ^\pm , π^\pm , p^\pm . (0.5 – 8 GeV/c.)

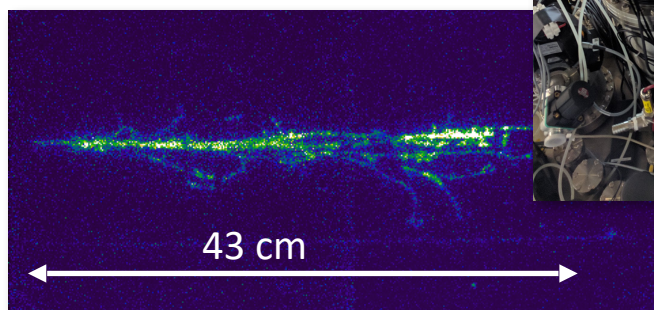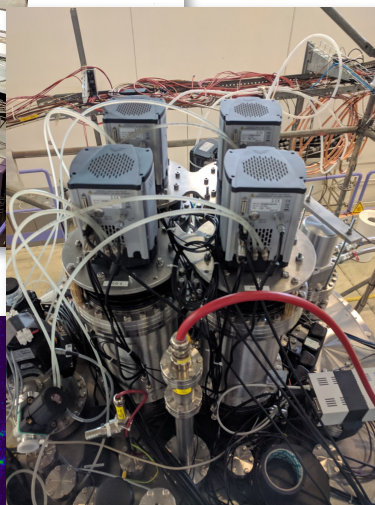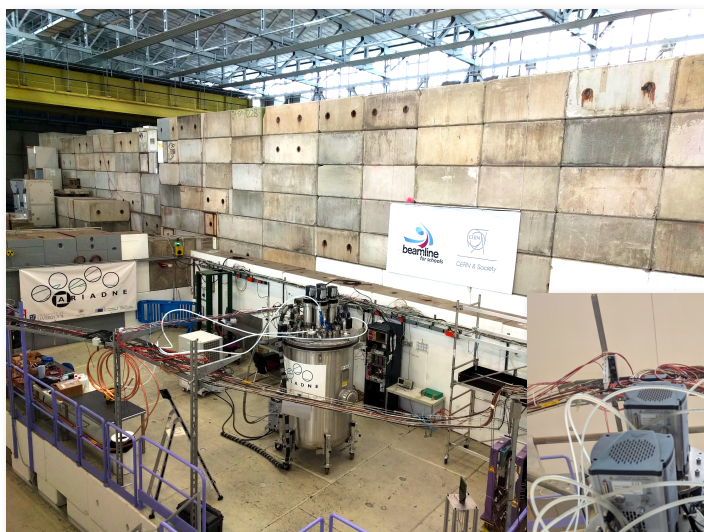






Timepix3 Mounted to ARIADNE

ARIADNE at the T9 Beamline

3 weeks of EMCCD data taken in 2018


T9 Beamline, East Area, CERN

Mix of particles: e^\pm , μ^\pm , π^\pm , p^\pm . (0.5 – 8 GeV/c.)

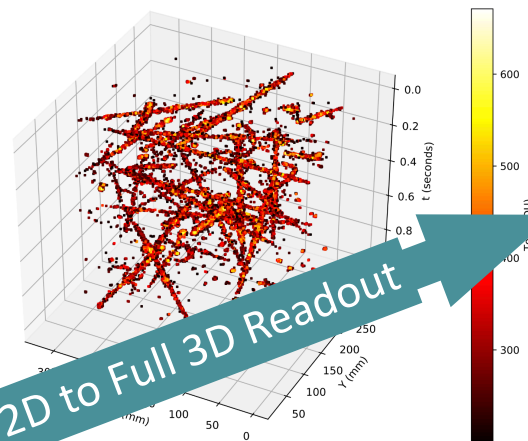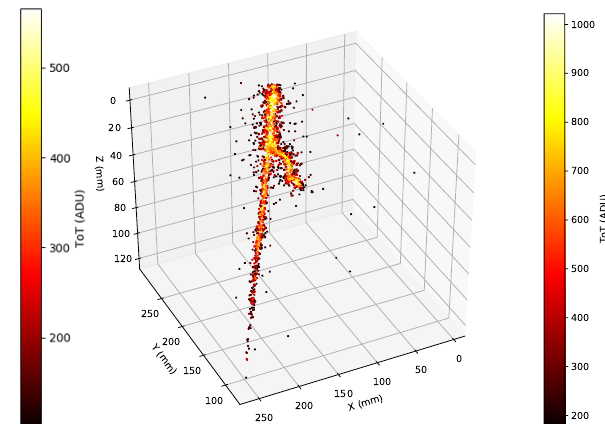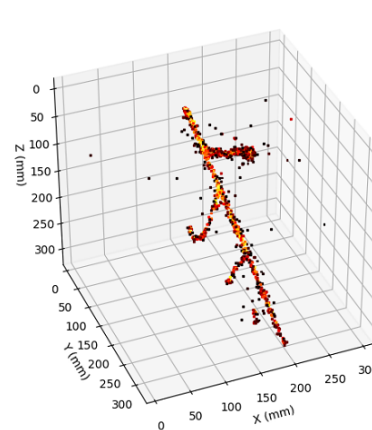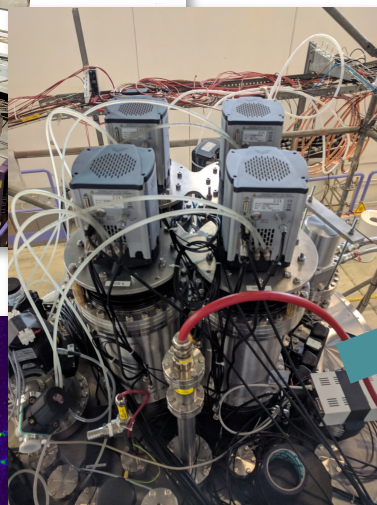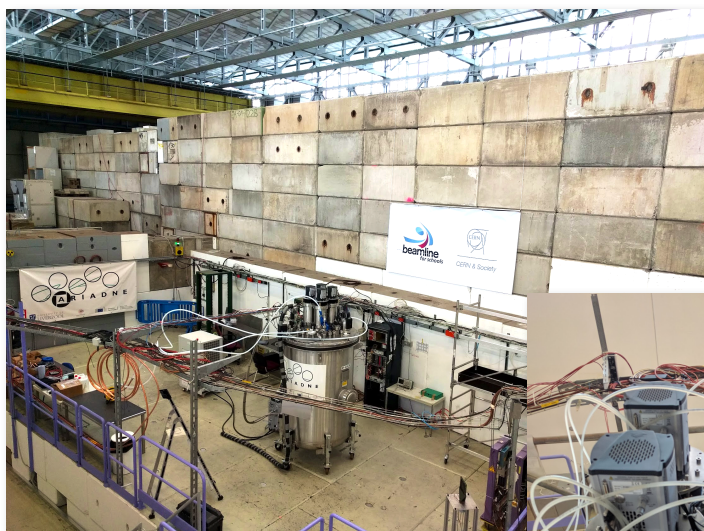

2D to Full 3D Readout


~1 mm Resolution

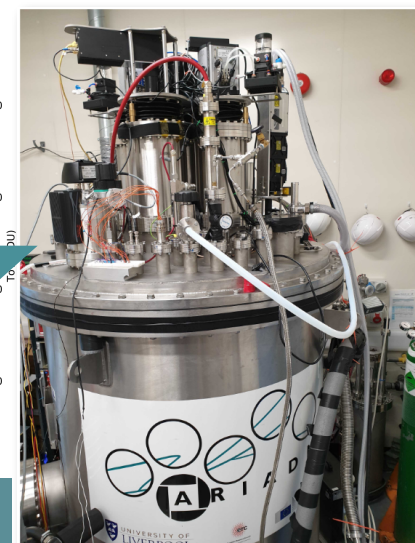

Data taken in 2019

Imaging comics in the LAr Lab at Liverpool

Timepix3 Mounted to ARIADNE

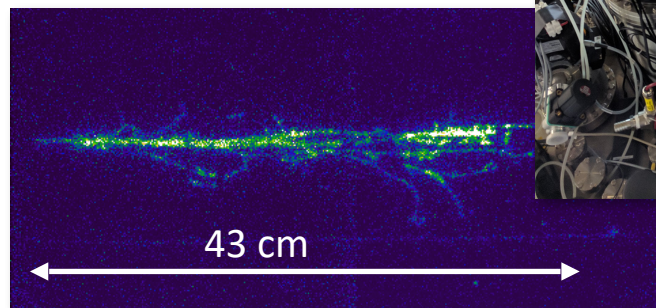

43 cm



ARIADNE Detector Timepix3 Results


<https://www.mdpi.com/2410-390X/4/4/35>

ARIADNE Detector Timepix3 Results

<https://www.mdpi.com/2410-390X/4/4/35>

- Analysis done on through going muons and stopping muons

THGEM Bias vs. S2 Light Production

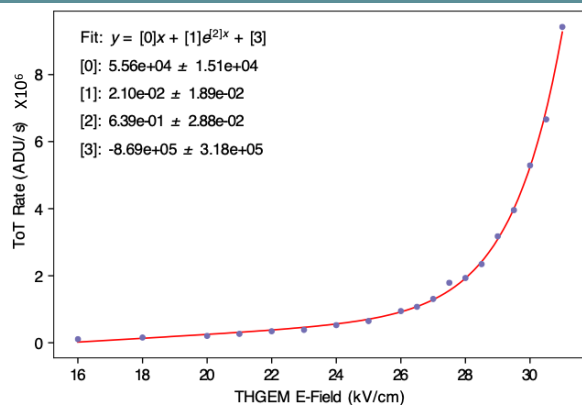


ARIADNE Detector Timepix3 Results


<https://www.mdpi.com/2410-390X/4/4/35>

- Analysis done on through going muons and stopping muons
- Energy resolution of **11%**

THGEM Bias vs. S2 Light Production

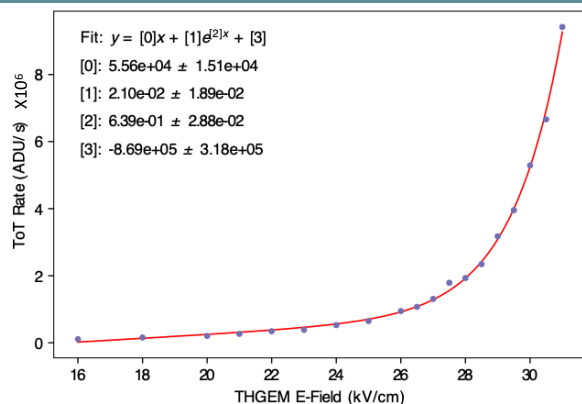

ADU/cm vs. No. Of Events




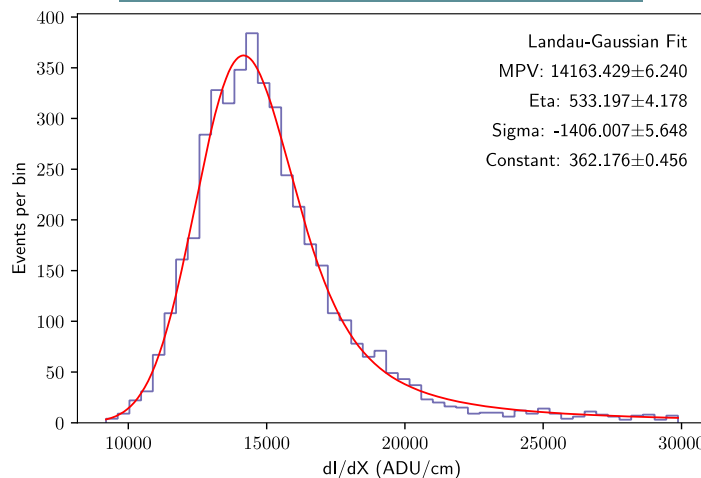


ARIADNE Detector Timepix3 Results


<https://www.mdpi.com/2410-390X/4/4/35>

- Analysis done on through going muons and stopping muons
- Energy resolution of **11%**



THGEM Bias vs. S2 Light Production

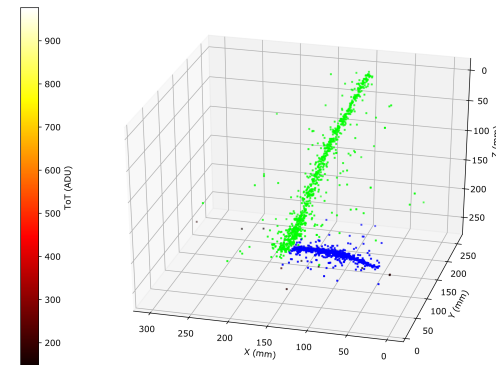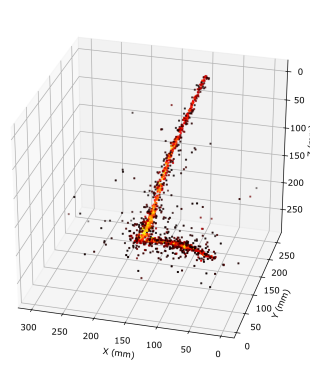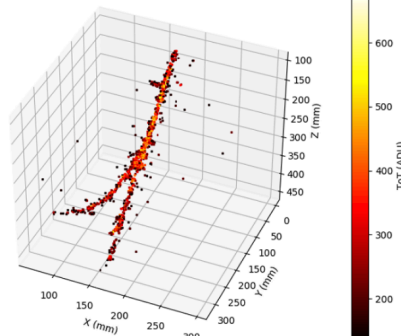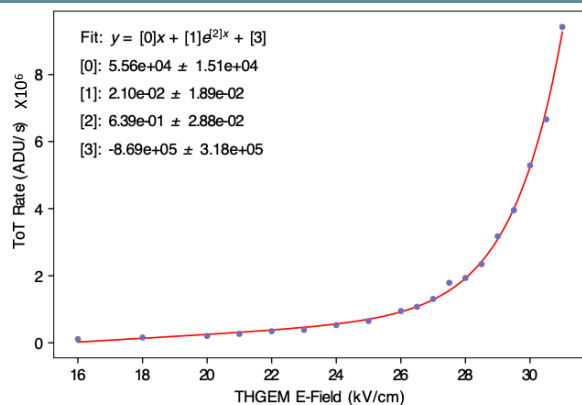

Stopping Muon

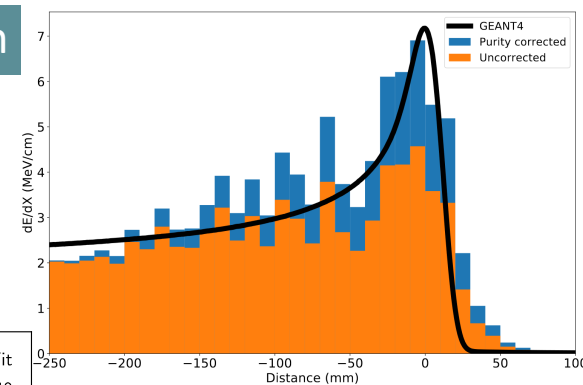

ADU/cm vs. No. Of Events

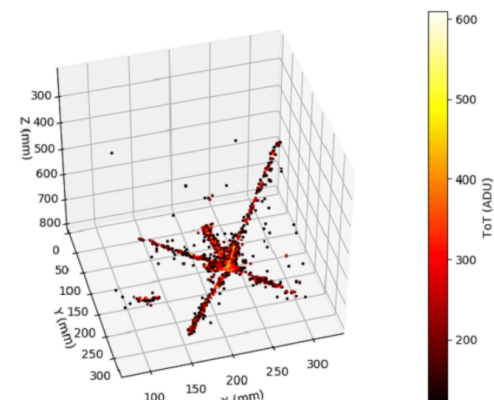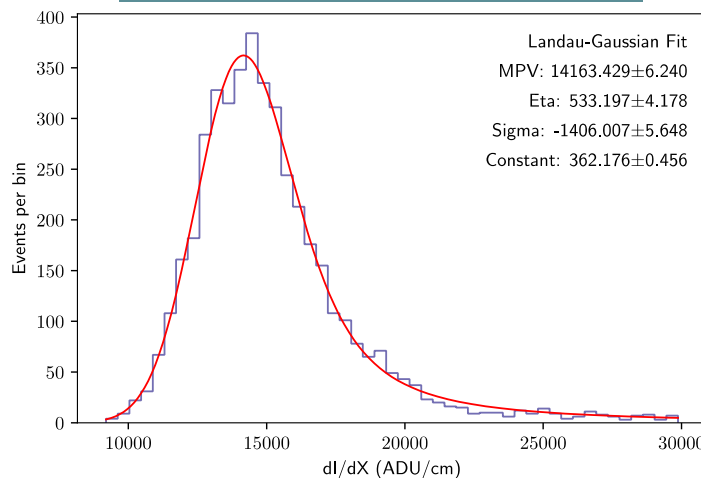

ARIADNE: Optical Readout for kilo-tonne scale LAr TPCs

- Proven scalable technology
- Cost efficient, comparable performance to other readout methods
- An option for a **DUNE Far LAr Detector**?

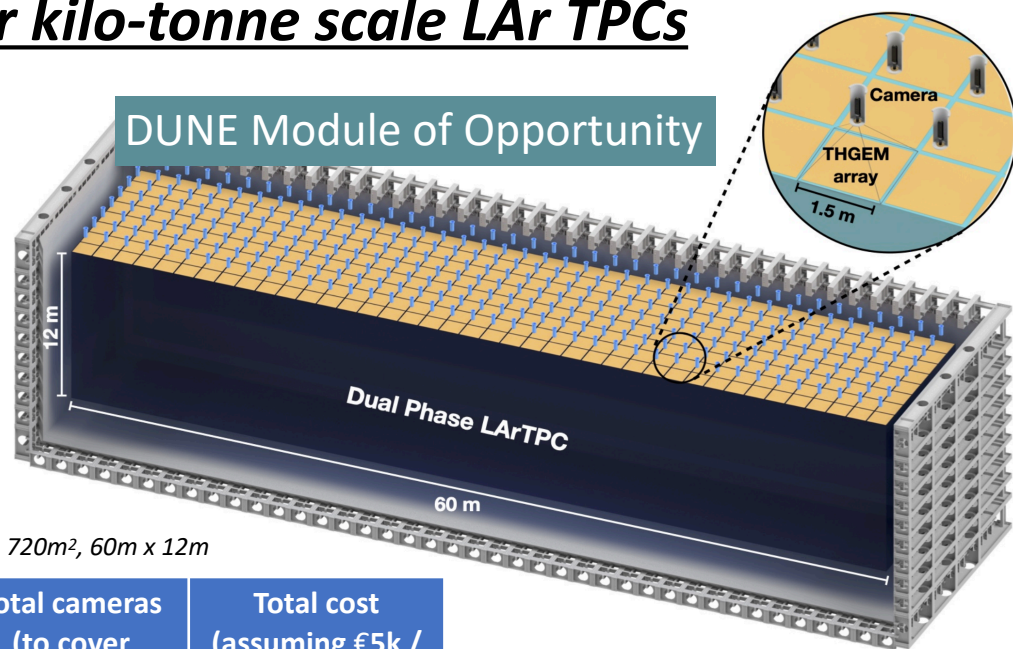


Table: As an example, demonstration figures for use of TimePix within Dune - 720m², 60m x 12m

Camera type	Sen. Size (pixels)	Cameras to cover 1m ²	Resolution (mm/pix)	Total cameras (to cover 720m ²)	Total cost (assuming €5k / camera*)
TPX3	256x256	9	1.3 (~ARIADNE)	6480	32.4M
TPX3	256x256	4	2	2880	14.4M
TPX3	256x256	1	4 (~ARIADNE+)	720	3.6M
TPX4	512x448	4	1	2880	14.4M
TPX4	512x448	1	2	720	3.6M
TPX4	512x448	0.66 (1.5m/ cam)	3	320	1.6M


* Cost is a place holder based on discussions with ASI, assumes large production

Large-scale demonstration of the ARIADNE LArTPC optical readout system at the CERN Neutrino Platform

*Testing optical readout on a scale
relevant for DUNE using the existing
protoDUNE cold box*

*15 Tonne Cryogenic Vessel filled from
protoDUNE Dual-Phase cryostat*

*Carried out between February
and April of this year*

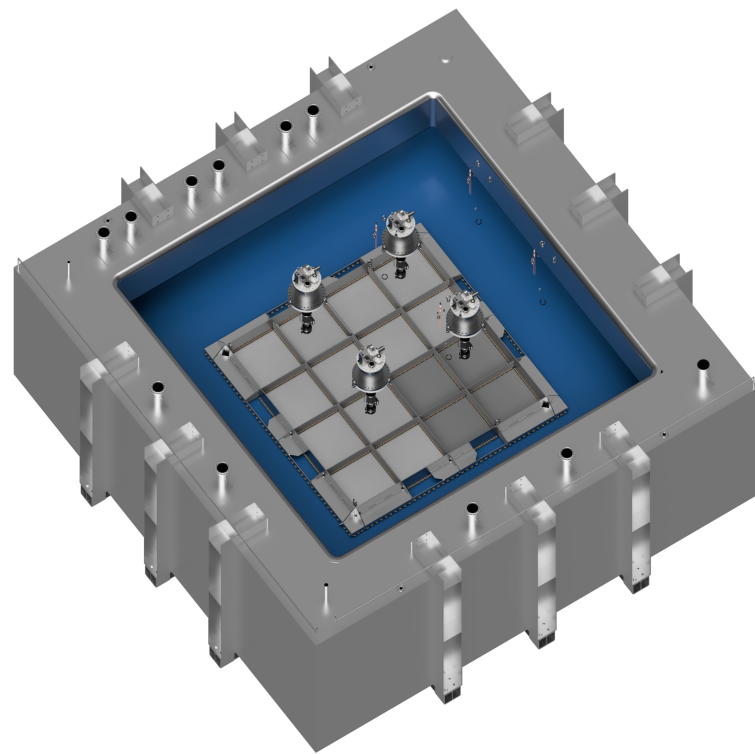

P. Amedo³, D. González-Díaz³, A. Lowe¹, K. Majumdar¹, K. Mavrokoridis^{*1},
M. Nessi^{†2}, B. Philippou¹, F. Pietropaolo², F. Resnati², A. Roberts¹, Á. Saá
Hernández³, C. Touramanis¹ and J. Vann¹


¹University of Liverpool, Department of Physics, Oliver Lodge Bld, Liverpool, L69 7ZE, UK

²European Organization for Particle Physics (CERN), Geneva, Switzerland

³Instituto Galego de Física de Altas Enerxías (IGFAE) Rúa de Xoquín Díaz de Rábago, s/n, Campus
Vida, 15782 Santiago de Compostela, Spain

CERN LOI: <https://cds.cern.ch/record/2739360>

ARIADNE+: Cryostat Configuration

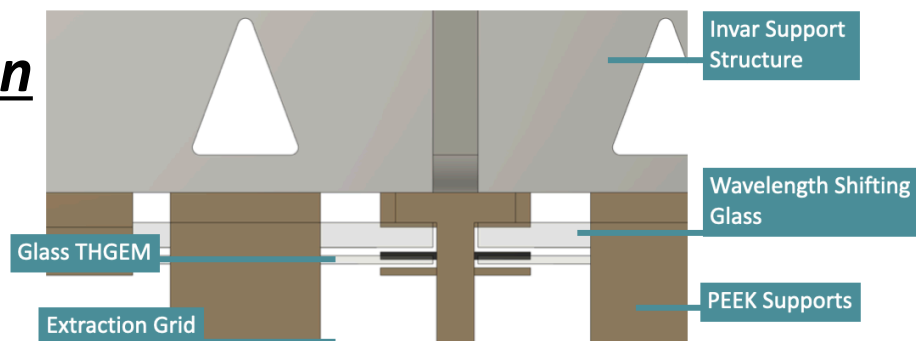


4 TPX3 Cameras imaging 1 x 1 m active region each (3 x visible, 1 x Direct VUV)

Nitrogen Flushed Reentrant Viewports

Light Readout Plane (LRP)

Cathode and imbedded Photo-detectors (USC)

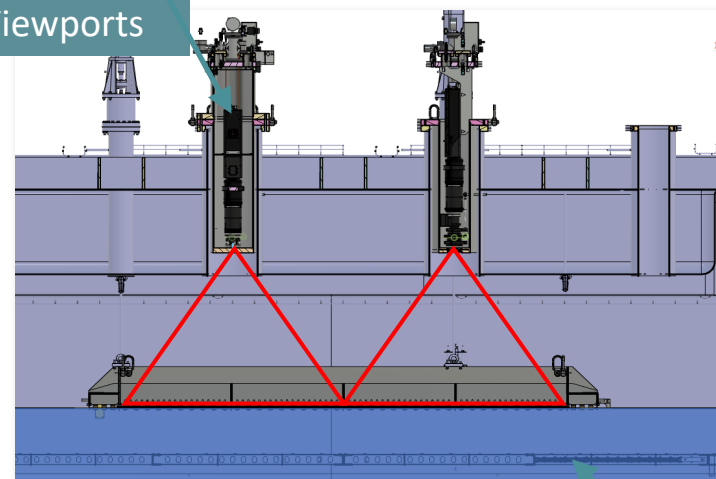

20 cm drift region




ARIADNE+ Detector - Innovative Ideas





ARIADNE+ Detector - Innovative Ideas

Glass THGEMs - Less prone to sagging compared to FR4 at larger surface areas, conical hole shape collects charge over time and increases light output (<https://www.mdpi.com/2076-3417/11/20/9450>)

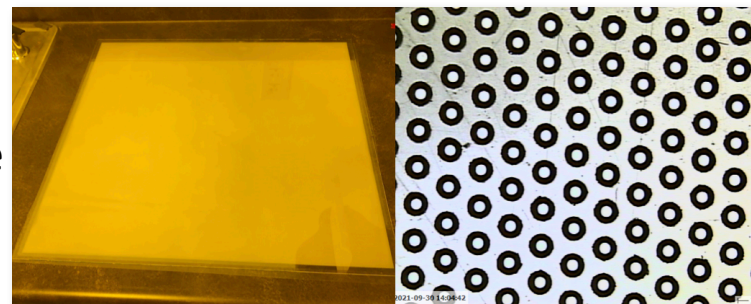

ARIADNE+ Detector - Innovative Ideas



Glass THGEMs - Less prone to sagging compared to FR4 at larger surface areas, conical hole shape collects charge over time and increases light output (<https://www.mdpi.com/2076-3417/11/20/9450>)

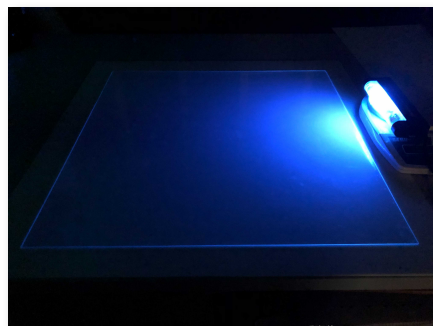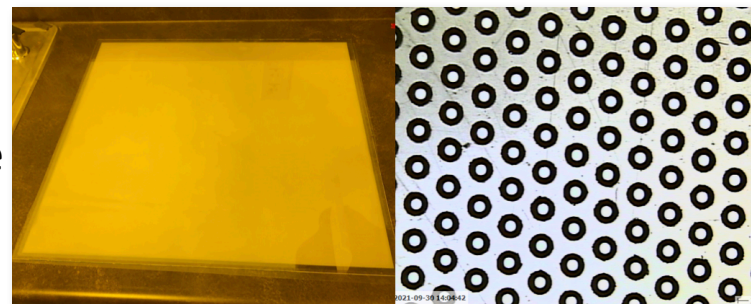

Polyethylene Naphthalate (PEN) Film coated glass panels for Wavelength Shifting (WLS) - commercially available, easier to apply to surfaces than alternatives (TPB)


ARIADNE+ Detector - Innovative Ideas

Glass THGEMs - Less prone to sagging compared to FR4 at larger surface areas, conical hole shape collects charge over time and increases light output (<https://www.mdpi.com/2076-3417/11/20/9450>)

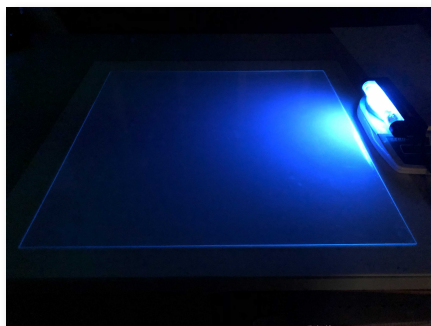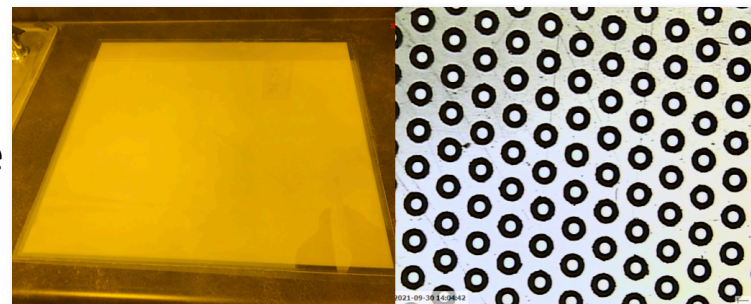



Polyethylene Naphthalate (PEN) Film coated glass panels for Wavelength Shifting (WLS) - commercially available, easier to apply to surfaces than alternatives (TPB)

VUV intensifier - imaging the THGEM directly without the need for any WLS




ARIADNE+ Detector - Innovative Ideas

Glass THGEMs - Less prone to sagging compared to FR4 at larger surface areas, conical hole shape collects charge over time and increases light output (<https://www.mdpi.com/2076-3417/11/20/9450>)

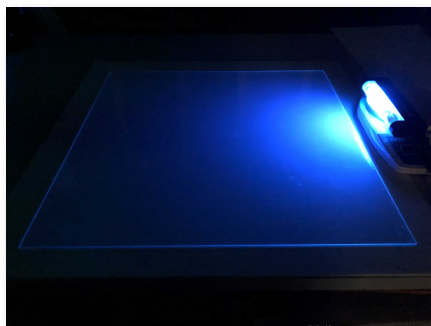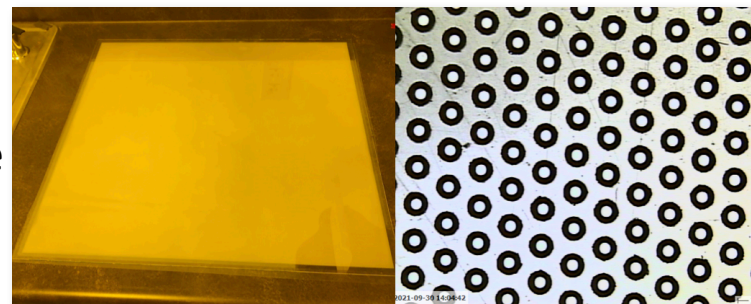


Polyethylene Naphthalate (PEN) Film coated glass panels for Wavelength Shifting (WLS) - commercially available, easier to apply to surfaces than alternatives (TPB)

VUV intensifier - imaging the THGEM directly without the need for any WLS


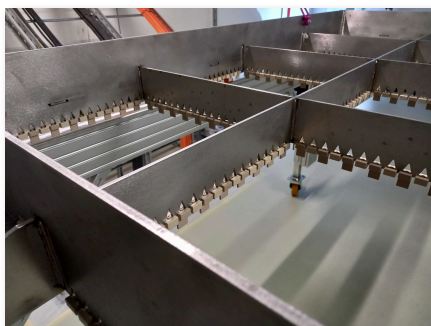


Invar support structure - Uniquely low coefficient of thermal contraction




ARIADNE+ Detector - Innovative Ideas

Glass THGEMs - Less prone to sagging compared to FR4 at larger surface areas, conical hole shape collects charge over time and increases light output (<https://www.mdpi.com/2076-3417/11/20/9450>)

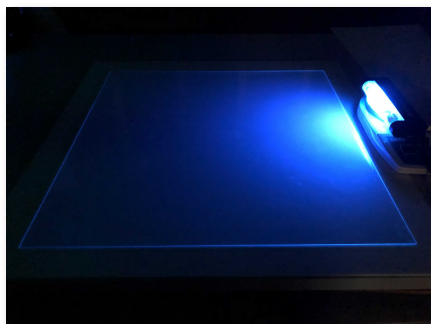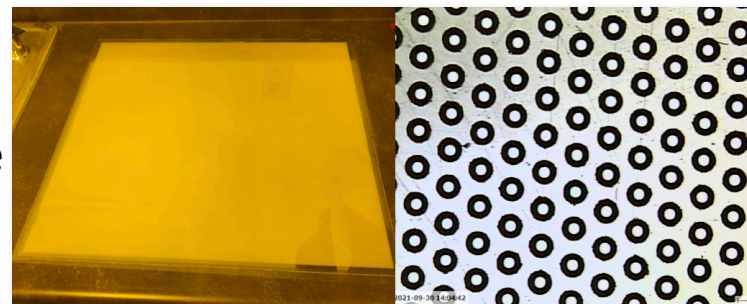


Polyethylene Naphthalate (PEN) Film coated glass panels for Wavelength Shifting (WLS) - commercially available, easier to apply to surfaces than alternatives (TPB)

VUV intensifier - imaging the THGEM directly without the need for any WLS

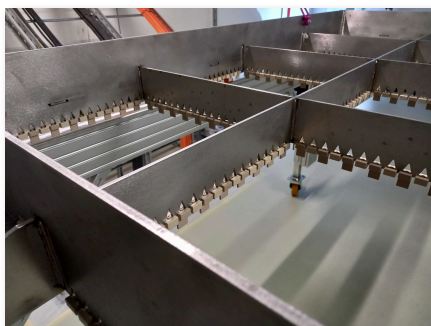

Invar support structure - Uniquely low coefficient of thermal contraction


Chemically etched extraction grid - 15 mm from THGEM instead of 10 mm on ProtoDUNE dual-phase



TPX3 Camera Setup





TPX3 Camera Setup

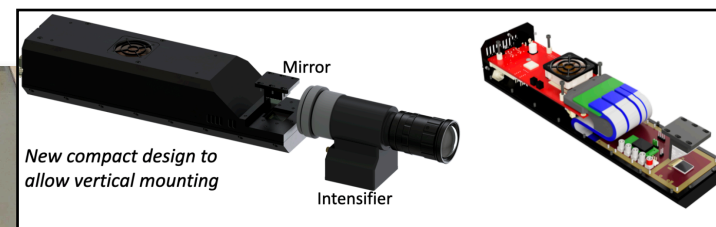

Timepix3
Camera



TPX3 Camera Setup

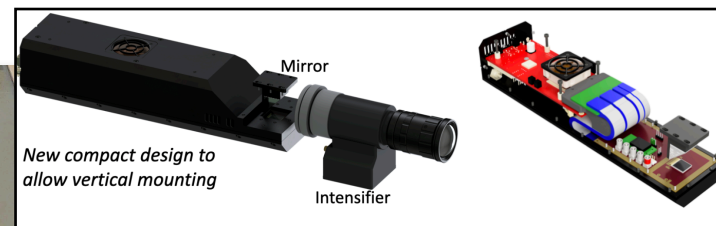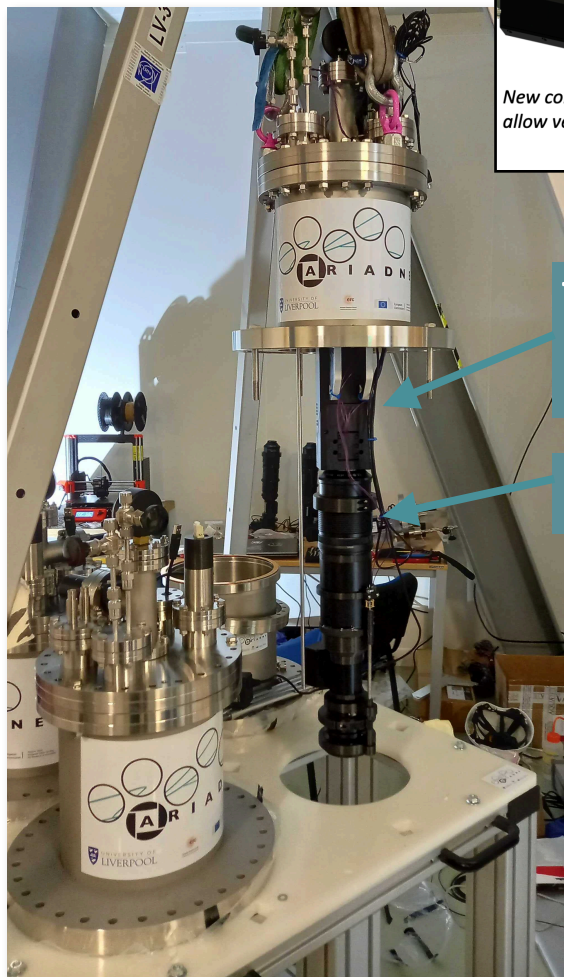

Timepix3
Camera

Relay Lens

TPX3 Camera Setup

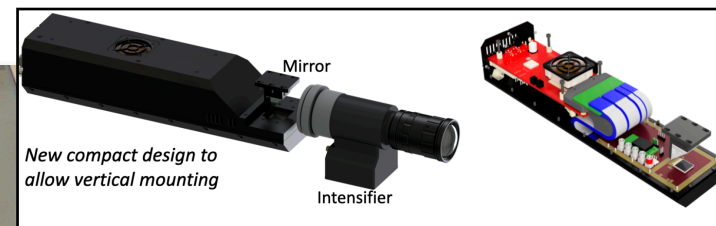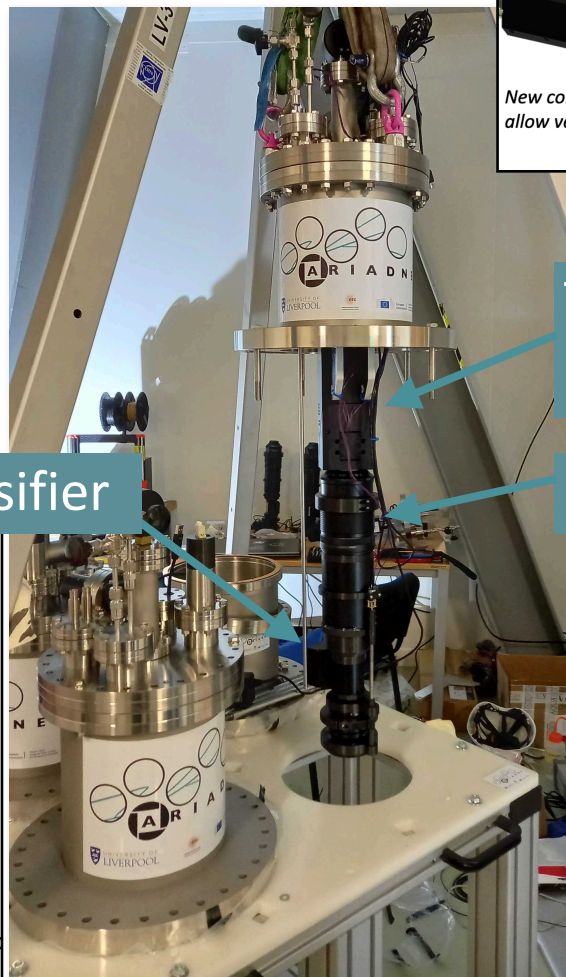


Timepix3
Camera


Relay Lens

Intensifier

Current intensifier output brightness : 0.5 cd/m^2
Final output brightness (typ) : 3.0 cd/m^2

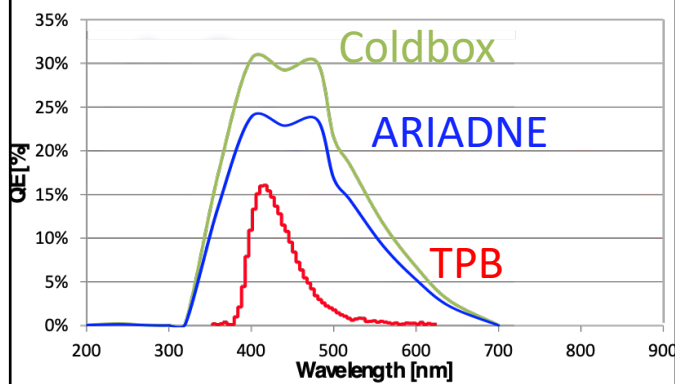

TPX3 Camera Setup

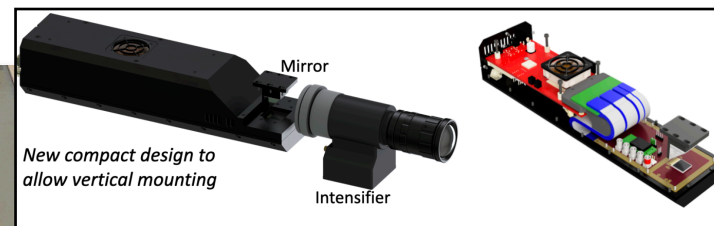

Intensifier

Timepix3
Camera


Relay Lens

Objective Lens

Visible (f0.95,
10.5 mm)

Custom made VUV
MgF₂ Lens
(f3, 11mm, 5mm
diameter)

Current intensifier output brightness : 0.5 cd/m²
Final output brightness (typ) : 3.0 cd/m²

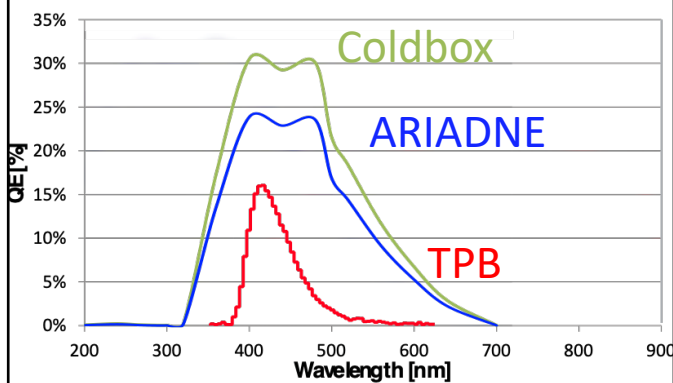




Light Readout Plane (LRP)


Light Readout Plane (LRP)

- 16 50 x 50 cm Glass THGEMs, developed by Liverpool
Patent Pending (Patent pending GB2019563.2)
- 1.1 mm thick, 500 μm ID holes, $\sim 500\text{k}$ holes per
THGEM, 800 μm pitch hexagonal array

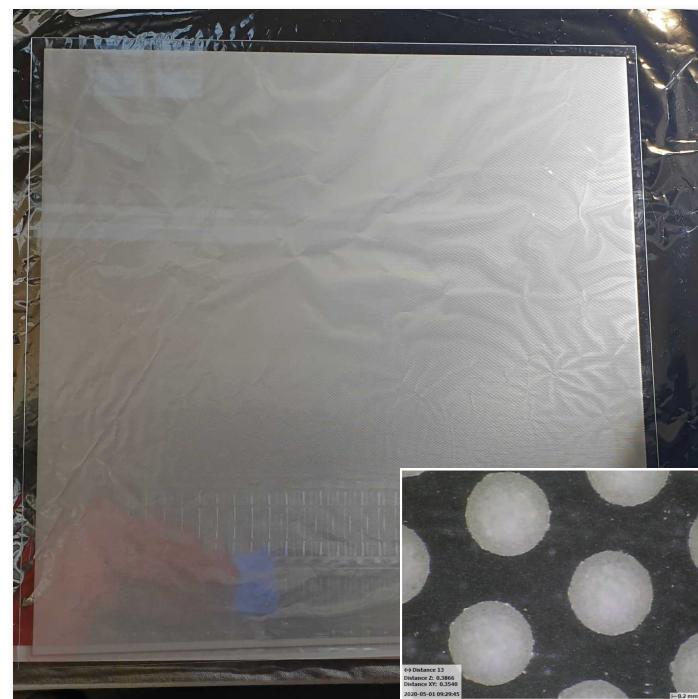


Light Readout Plane (LRP)

- 16 50 x 50 cm Glass THGEMs, developed by Liverpool
Patent Pending (Patent pending GB2019563.2)
- 1.1 mm thick, 500 μm ID holes, $\sim 500\text{k}$ holes per
THGEM, 800 μm pitch hexagonal array
- 12 50 x 50 cm PEN coated WLS glass

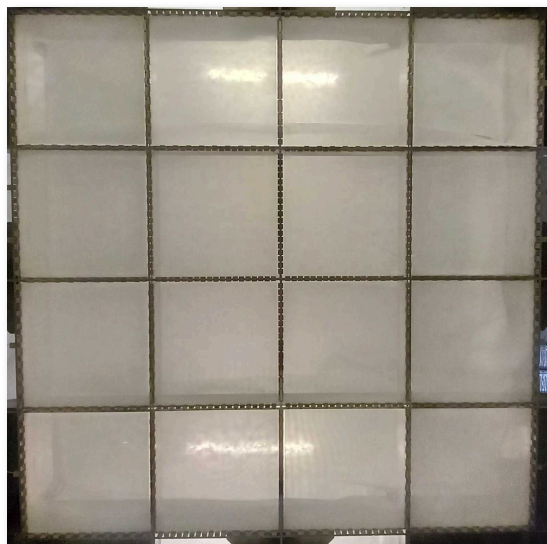


04/08/2022

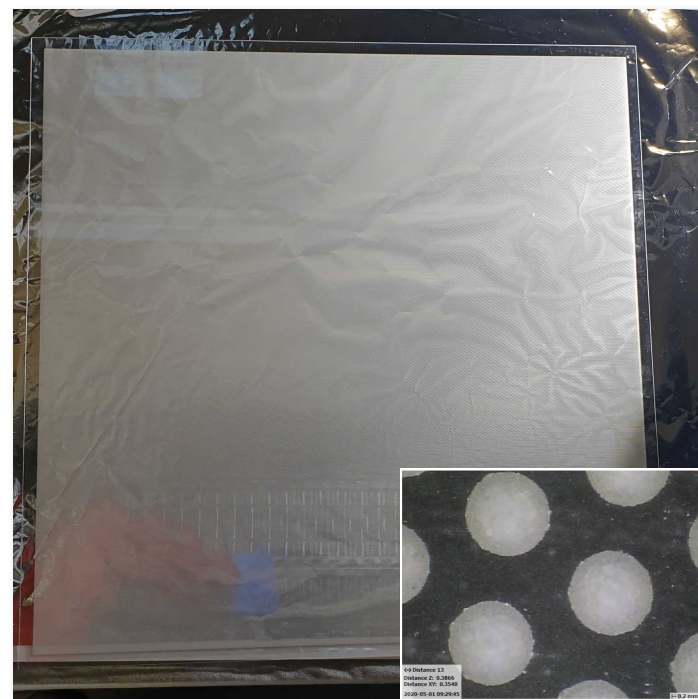


Light Readout Plane (LRP)


- 16 50 x 50 cm Glass THGEMs, developed by Liverpool
Patent Pending (Patent pending GB2019563.2)
- 1.1 mm thick, 500 μm ID holes, $\sim 500\text{k}$ holes per
THGEM, 800 μm pitch hexagonal array
- 12 50 x 50 cm PEN coated WLS glass
- Photochemically etched modular extraction grid

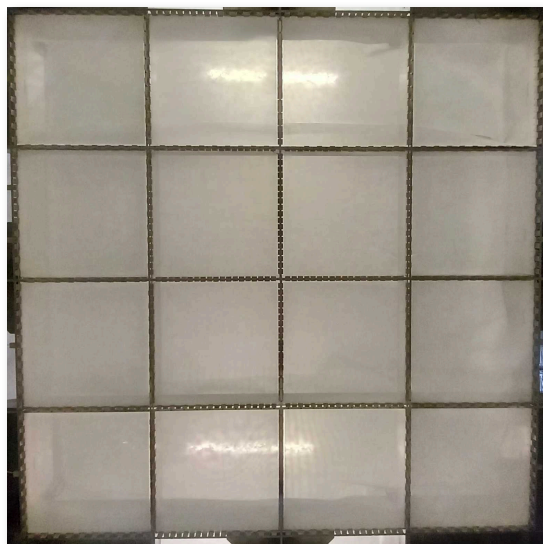

04/08/2022

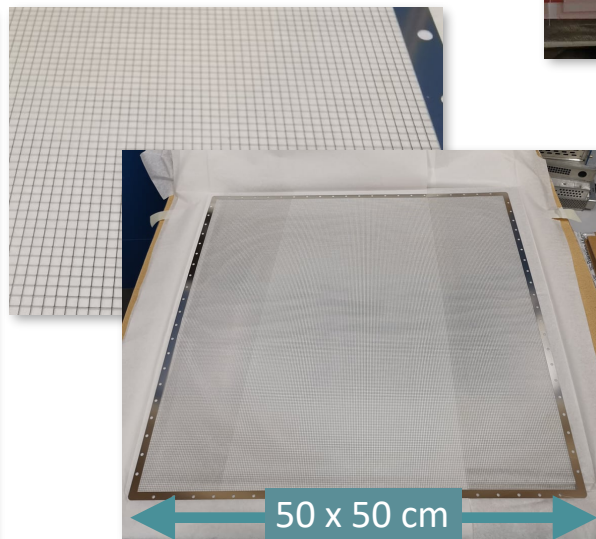


A.Lowe | ARIADNE+ | NuFACT22

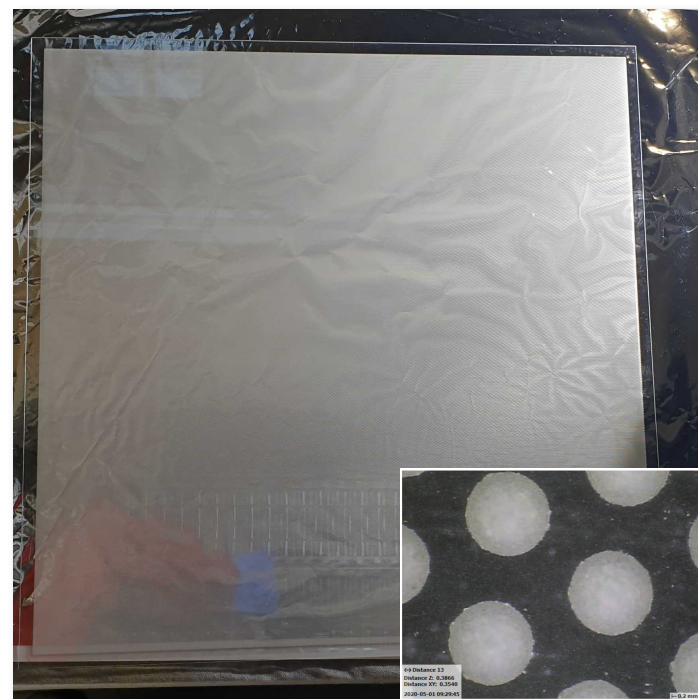


Light Readout Plane (LRP)


- 16 50 x 50 cm Glass THGEMs, developed by Liverpool Patent Pending (Patent pending GB2019563.2)
- 1.1 mm thick, 500 μm ID holes, $\sim 500\text{k}$ holes per THGEM, 800 μm pitch hexagonal array
- 12 50 x 50 cm PEN coated WLS glass
- Photochemically etched modular extraction grid
- 2.3 x 2.3 m frame mounted underneath cold box lid

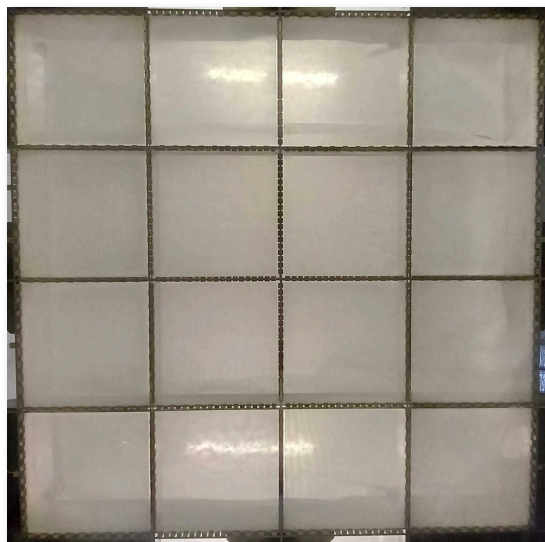


04/08/2022

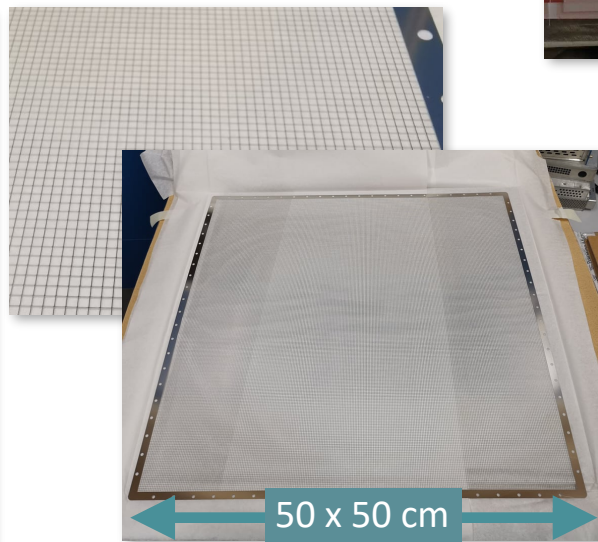


A.Lowe | ARIADNE+ | NuFACT22

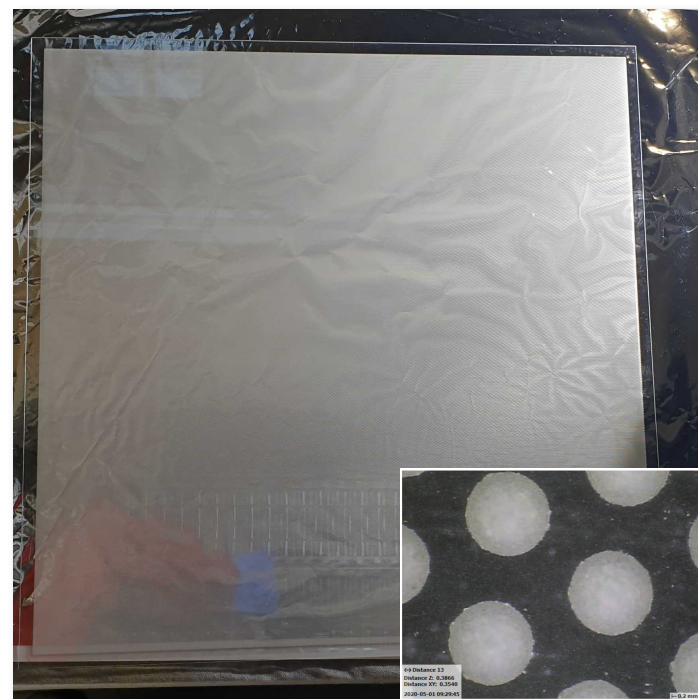

Detector Levelling


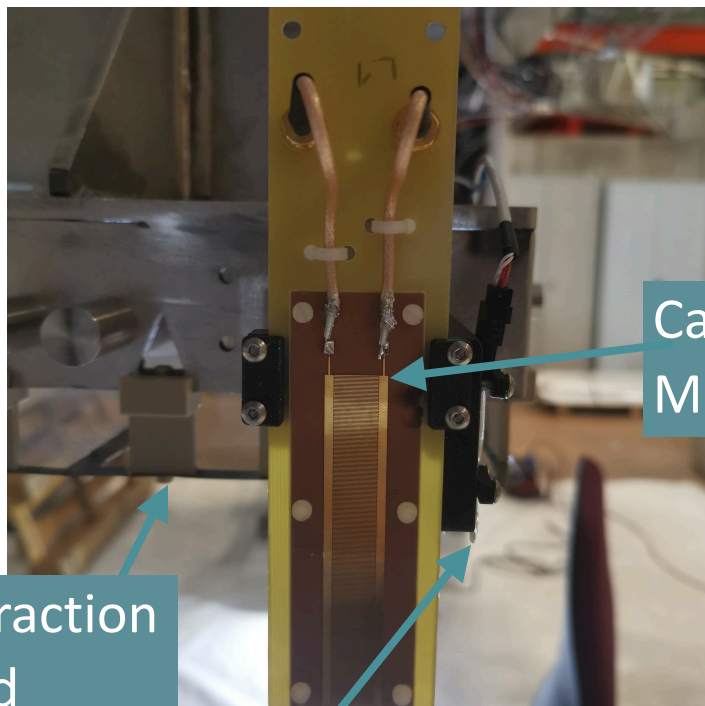


Height Adjustment


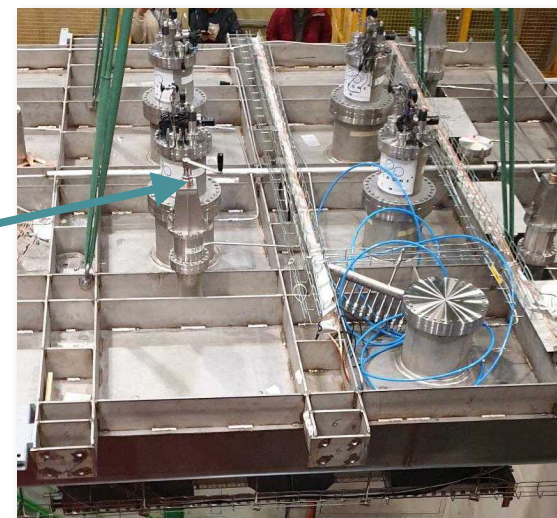


Data Collection

- Very stable cryogenic conditions thanks to the great CERN team
- Argon purity was approximately 0.5 msec
- Three weeks of data collection, refilled twice
- USC collected S1 data using X-ARAPUCAS embedded within the cathode

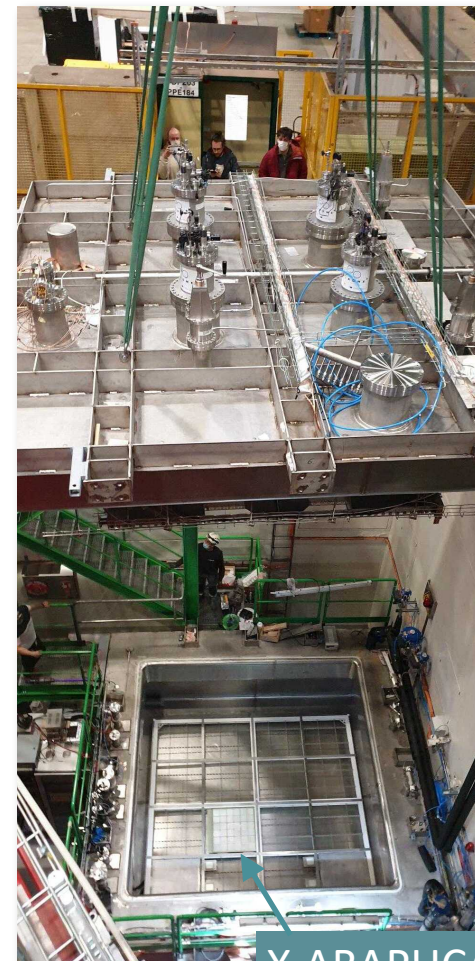
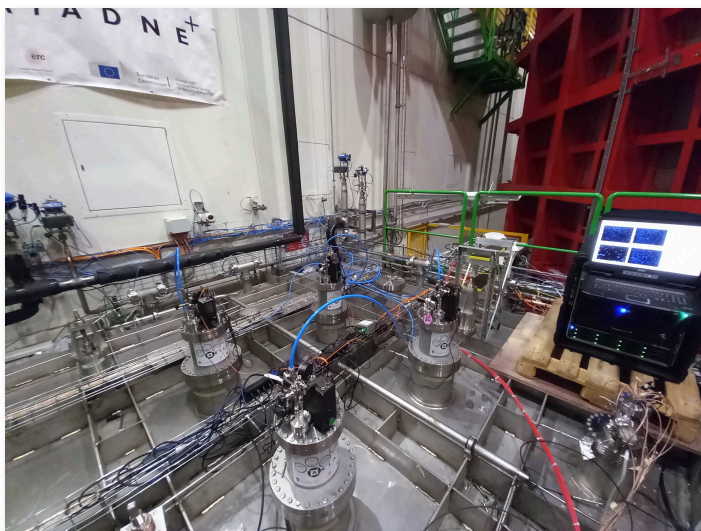


Gallery of Events - Visible Light

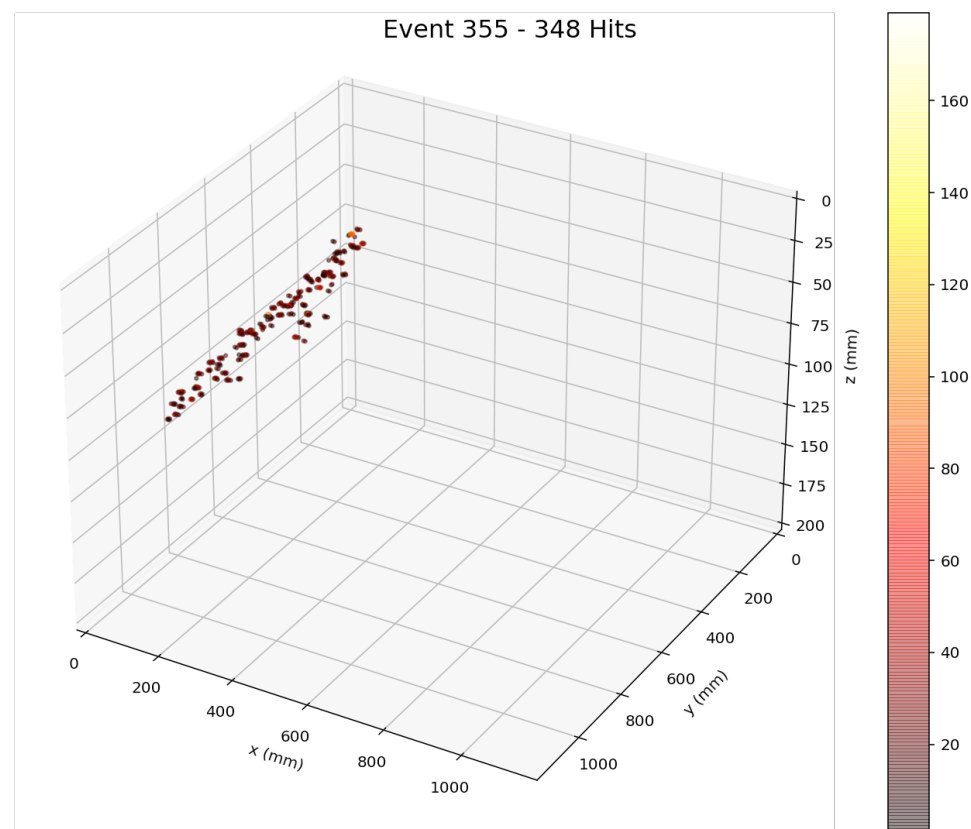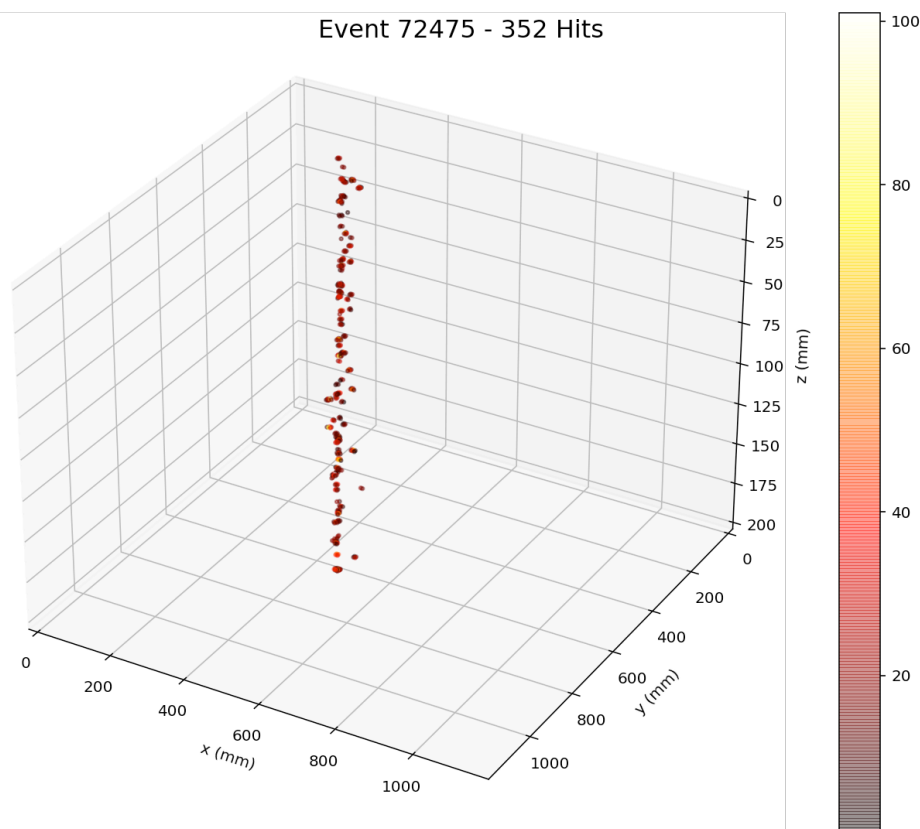

~4 mm Resolution

Gallery of Events - Visible Light

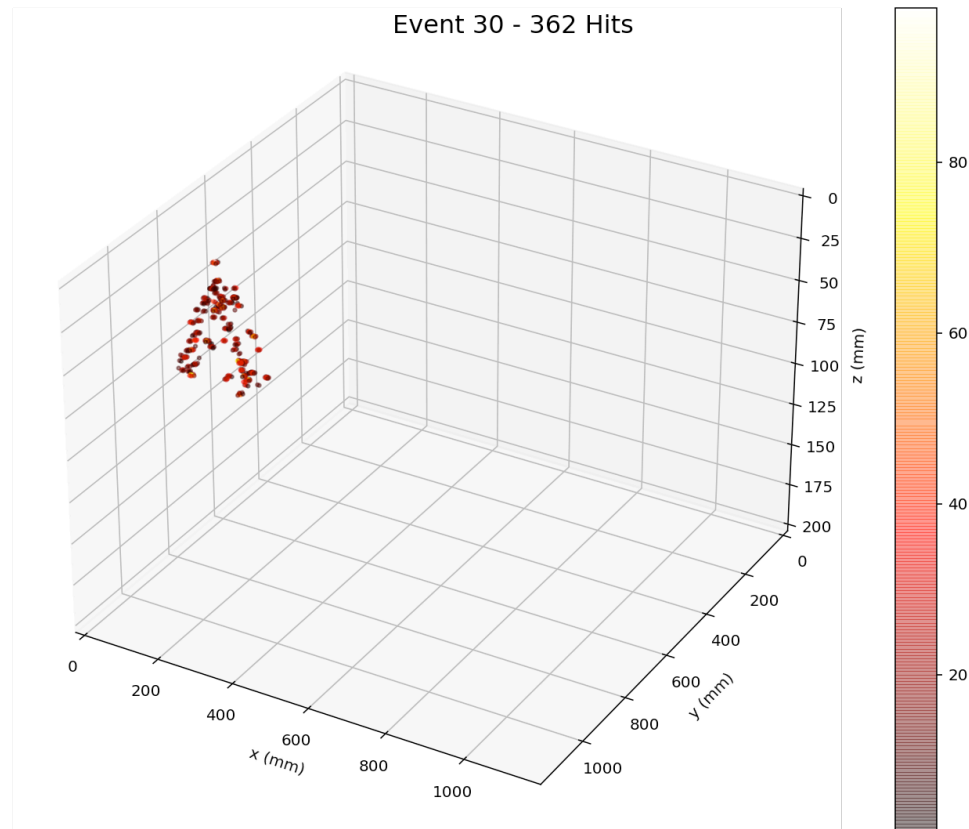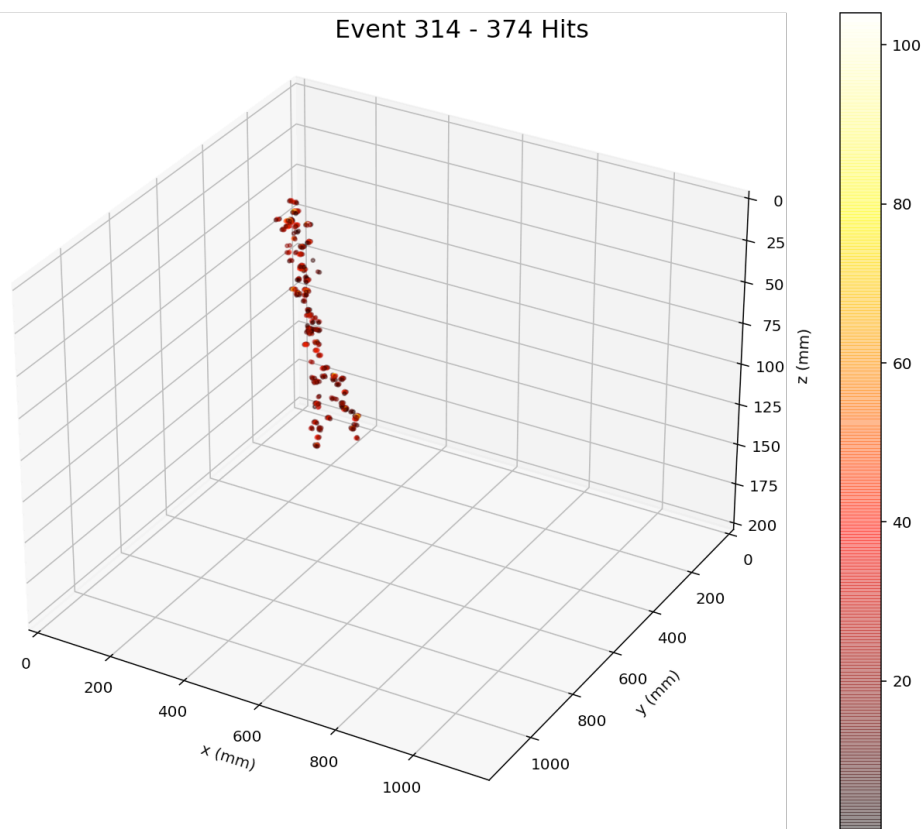


~4 mm Resolution




Gallery of Events - VUV

Event 6810 - 2,567 Hits

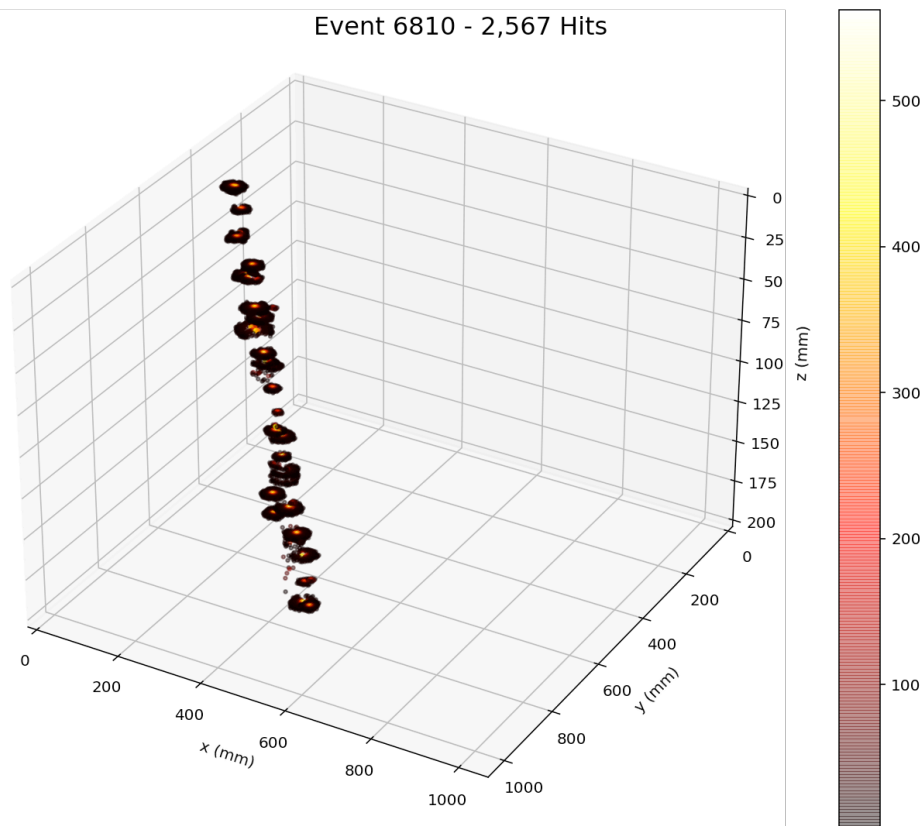


Event 17585 - 1,983 Hits

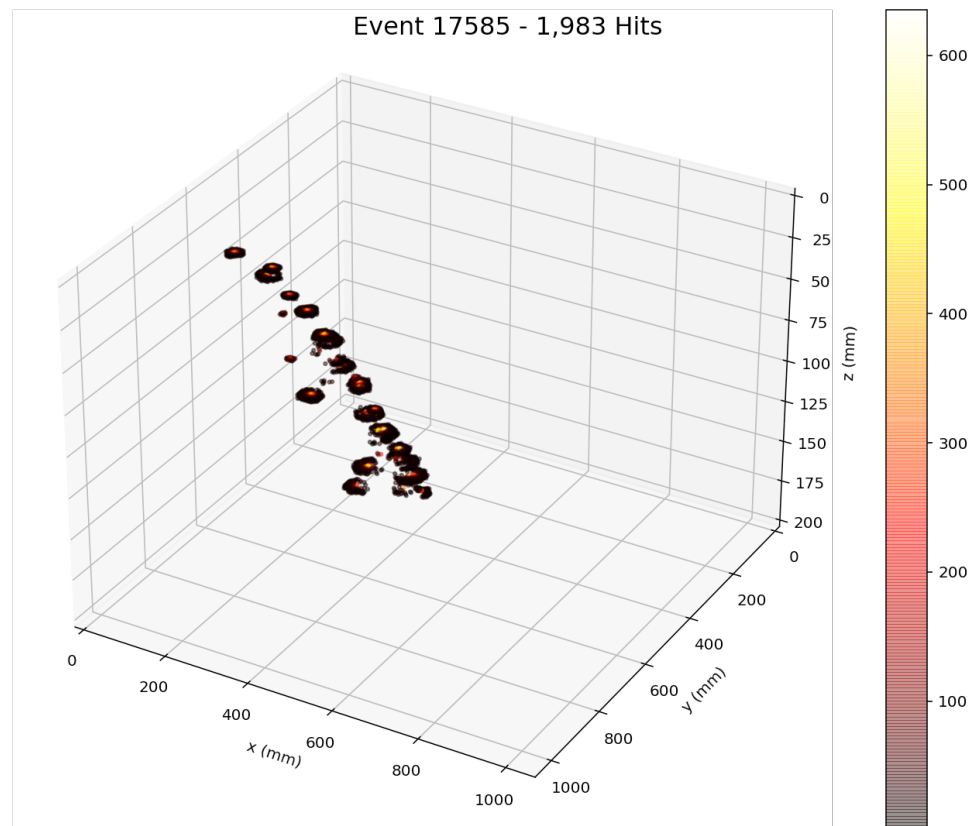


~4 mm Resolution

Glass THGEM Light Study

Visible Light

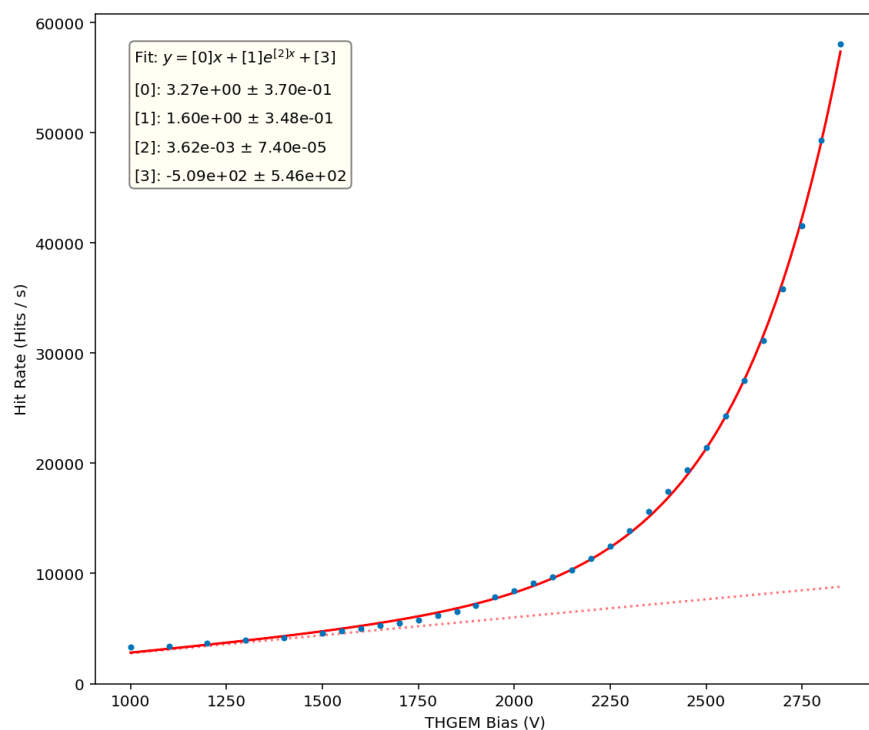


VUV Light

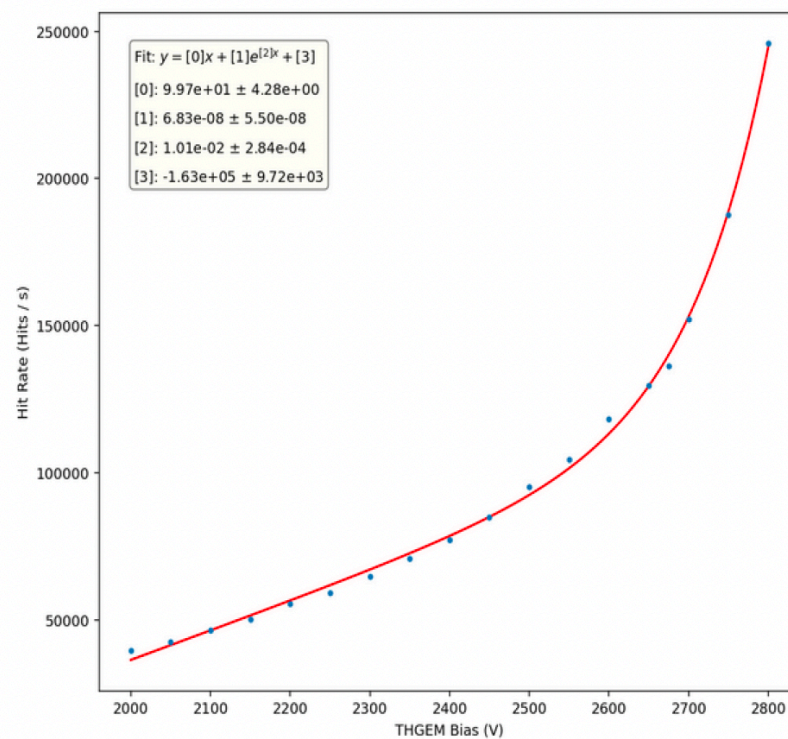


30 Second Exposure Cosmics

Visible Light




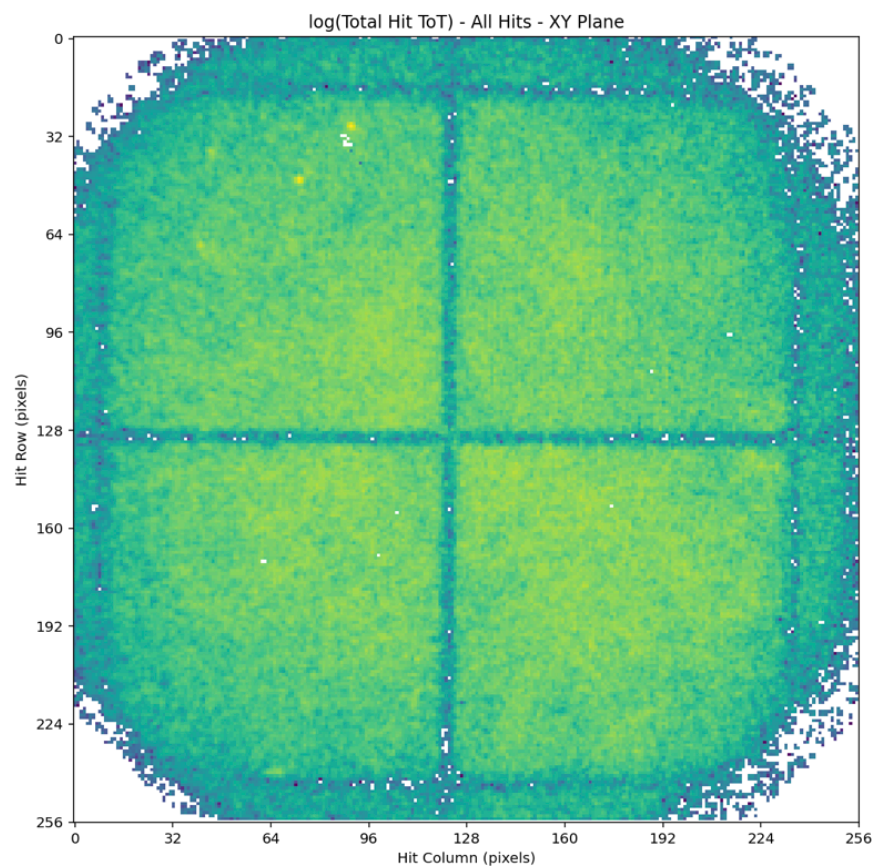


VUV Light

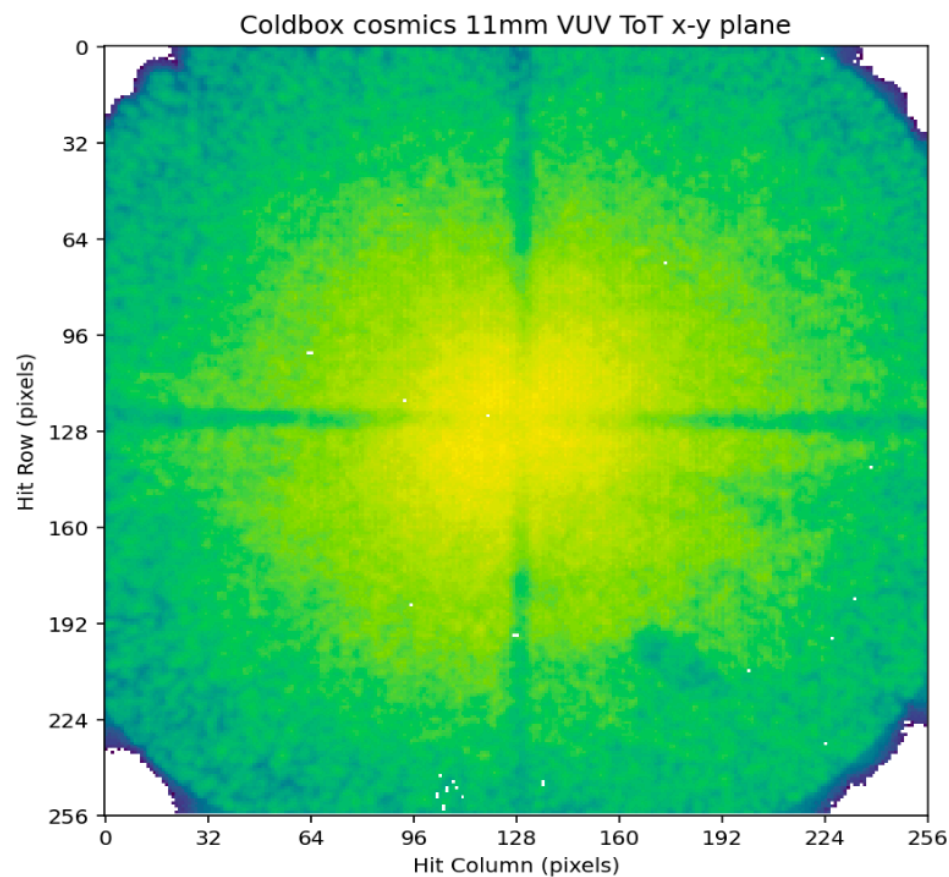


Energy Calibration and Resolution

- Track fitting to through going muons (Through THGEM and greater than 19 cm depth)
- Energy conversion : 199.10 ± 1.73 ADU / MeV
- Energy resolution : 16.73 ± 0.16 %

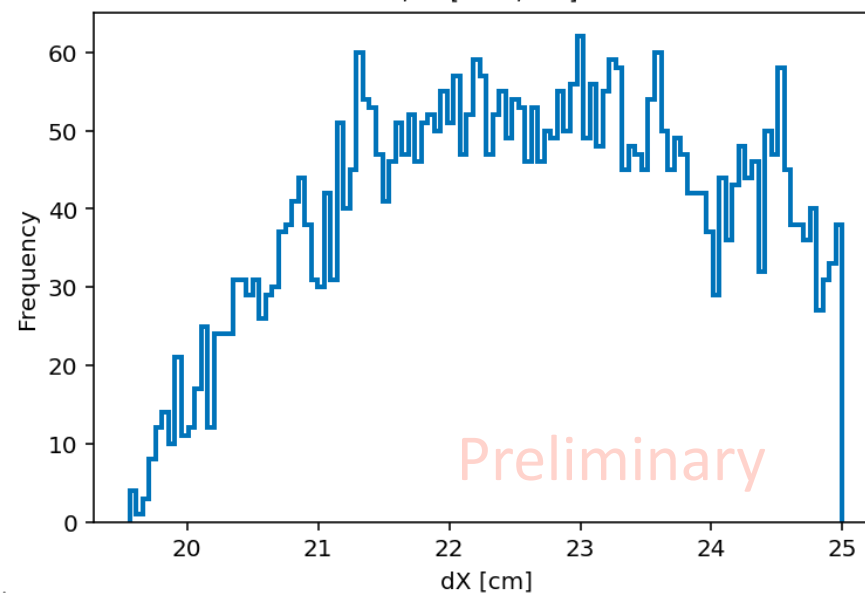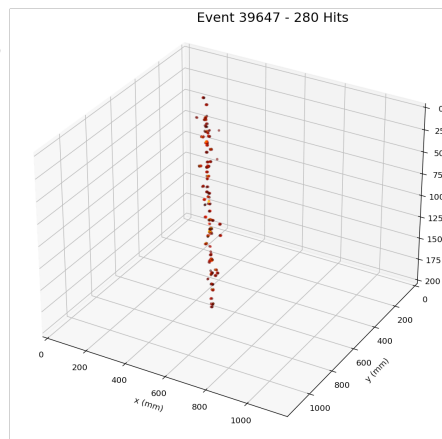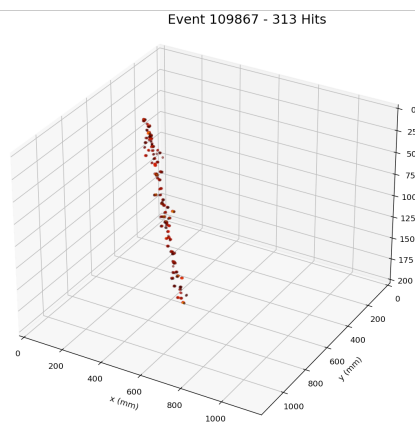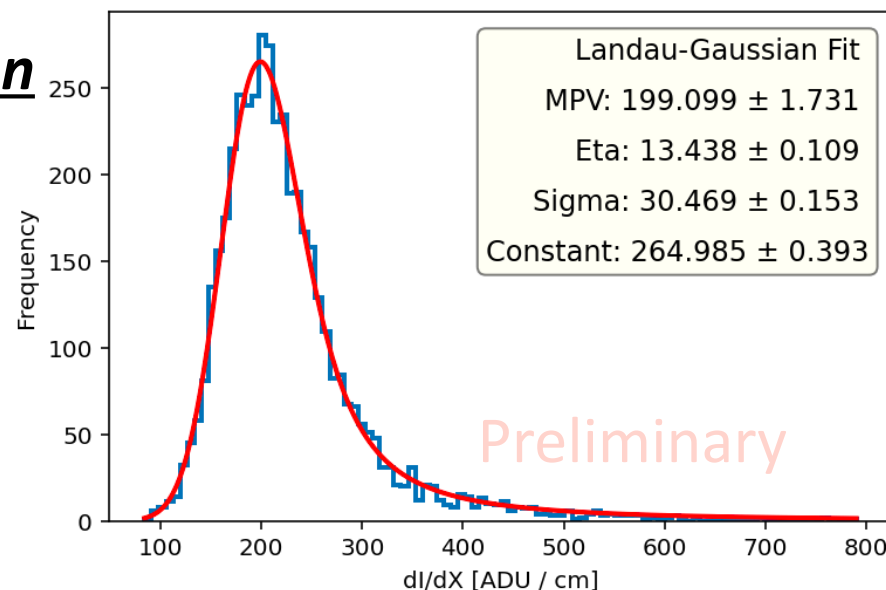


S1 Light Collection Studies

- USC collected data using the X-ARAPUCAS embedded within the cathode of the cold box
- Studies into discriminating between S1 and S2 signals
- Analysis is ongoing - correlation between X-ARAPUCA signal and ARIADNE+ data

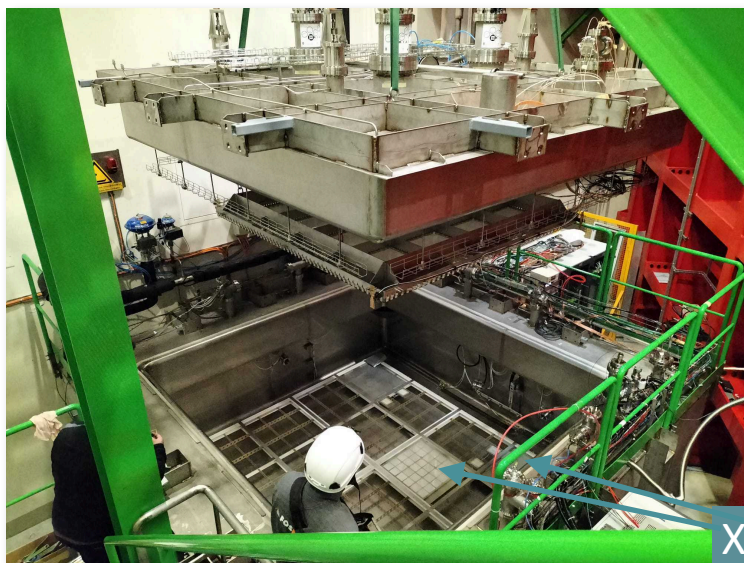

X-ARAPUCAS

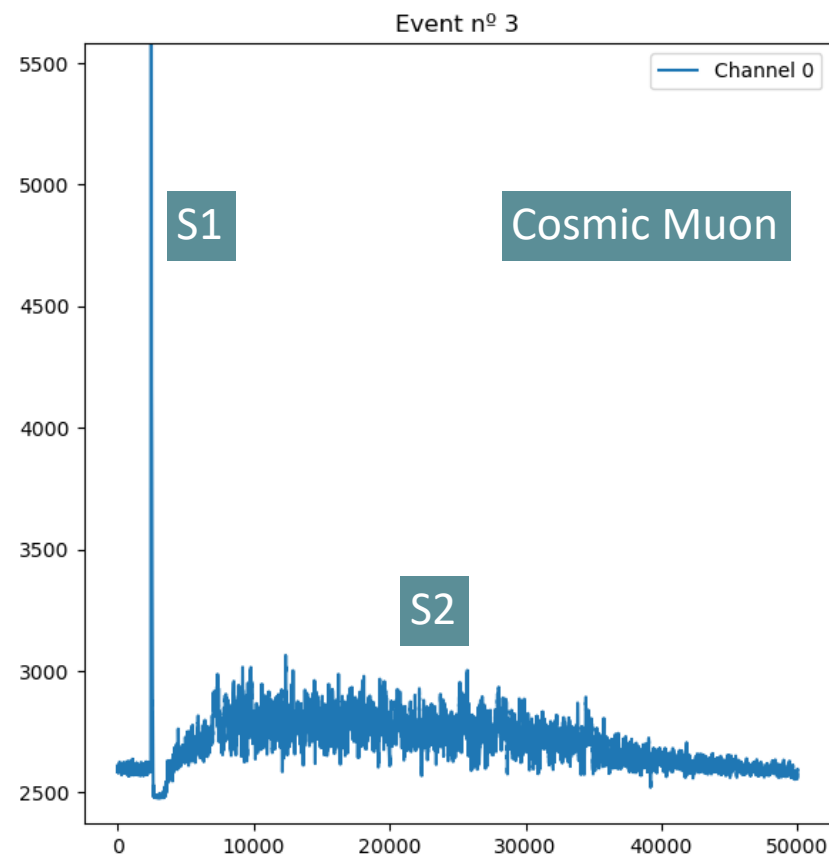



Conclusions and Outlook





Conclusions and Outlook

TPX3Cam TPC Benefits

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Zero suppressed readout (approx. few kbytes per event)

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)




Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)




Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Comparatively low cost to other readout methods

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)




Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Comparatively low cost to other readout methods

- Optical readout achieved with stable detector conditions has been demonstrated at the same scales as that for vertical drift tests (CERN Neutrino Platform Cold Box)

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Comparatively low cost to other readout methods

- Optical readout achieved with stable detector conditions has been demonstrated at the same scales as that for vertical drift tests (CERN Neutrino Platform Cold Box)
- TPX3 and Glass THGEM technology is ready for deployment **now**

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)




Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Comparatively low cost to other readout methods

- Optical readout achieved with stable detector conditions has been demonstrated at the same scales as that for vertical drift tests (CERN Neutrino Platform Cold Box)
- TPX3 and Glass THGEM technology is ready for deployment **now**
- An option for DUNE LAr Far Detector, DUNE LAr Near Detector and DUNE GAR Near Detector (if enough light is produced in pressurised gas Argon)?

Conclusions and Outlook

TPX3Cam TPC Benefits



Raw data is natively 3D

Huge readout rates possible (80 MHits/s)



Zero suppressed readout (approx. few kbytes per event)

High resolution with approx. 1 mm per pixel



Easy access for swapping in/out technologies

Same readout is possible for dual phase or gas TPCs



Comparatively low cost to other readout methods


- Optical readout achieved with stable detector conditions has been demonstrated at the same scales as that for vertical drift tests (CERN Neutrino Platform Cold Box)
- TPX3 and Glass THGEM technology is ready for deployment **now**
- An option for DUNE LAr Far Detector, DUNE LAr Near Detector and DUNE GAR Near Detector (if enough light is produced in pressurised gas Argon)?

We are open to expanding our collaboration!



Thank You for Listening!

Any questions?

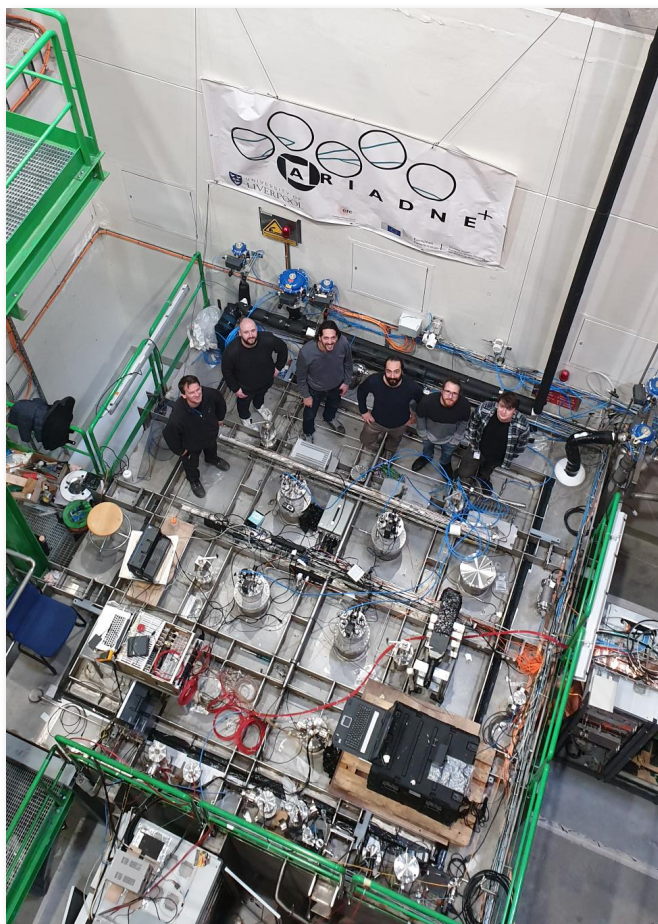

Once again thank you to the amazing CERN team for hosting ARIADNE+ and all their help getting the detector up and running!



Extra Slides

TPX3 to TPX4

			Timepix3 (2013)	Timepix4 (2019)
Technology			130nm – 8 metal	65nm – 10 metal
Pixel Size			55 x 55 μm	55 x 55 μm
Pixel arrangement			3-side buttable 256 x 256	4-side buttable 512 x 448 3.5x
Sensitive area			1.98 cm ²	6.94 cm ²
Readout Modes	Data driven (Tracking)	Mode	TOT and TOA	
		Event Packet	48-bit	64-bit 33%
		Max rate	0.43x10 ⁶ hits/mm ² /s	3.58x10⁶ hits/mm²/s
		Max Pix rate	1.3 KHz/pixel	10.8 KHz/pixel 8x
	Frame based (Imaging)	Mode	PC (10-bit) and iTOT (14-bit)	CRW: PC (8 or 16-bit)
		Frame	Zero-suppressed (with pixel addr)	Full Frame (without pixel addr)
		Max count rate	~0.82 x 10 ⁹ hits/mm ² /s	~5 x 10 ⁹ hits/mm ² /s 6x
TOT energy resolution			< 2KeV	< 1Kev 2x
Time resolution			1.56ns	195.3125ps 8x
Readout bandwidth			≤5.12Gb (8x SLVS@640 Mbps)	≤163.84 Gbps (16x @10.24 Gbps) 32x
Target global minimum threshold			<500 e ⁻	<500 e ⁻



THGEM S2 Light Production

VUV (126nm) light produced through de-excitation of Argon gas.
TPB Wavelength shifter above THGEM converts to 430nm.

At low field ($<2\text{kV/cm}$), S2 light production is linearly proportional to THGEM field. No charge gain. Very stable operation without discharges. No ion production.

At higher fields, electron multiplication occurs (Townsend avalanche).


Exponentially increasing S2 light production \rightarrow Improved sensitivity/threshold

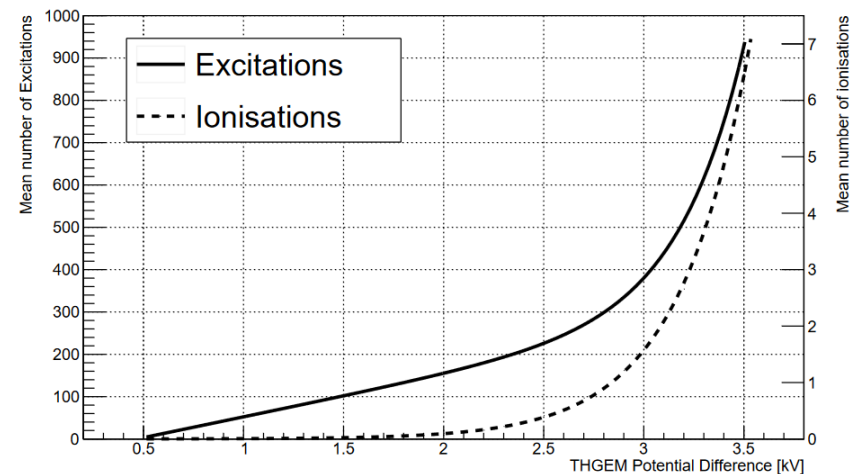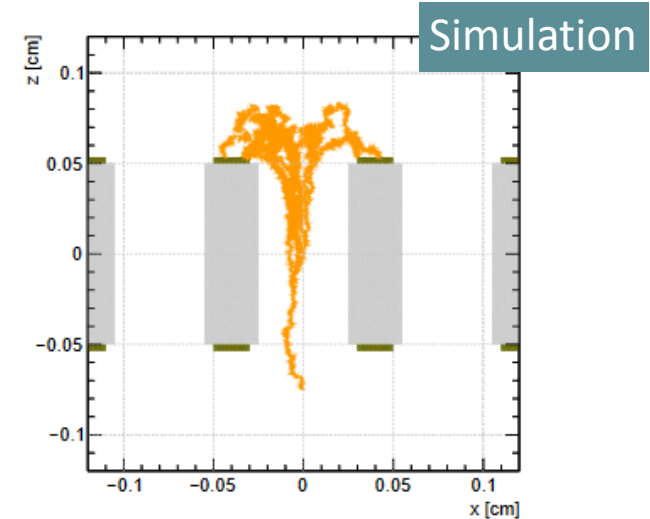

TPX3 Data Packets

Each Hit (Min 500 electrons):

- X Position
- Y Position
- Time of Arrival (ToA)
- Time over Threshold (ToT)

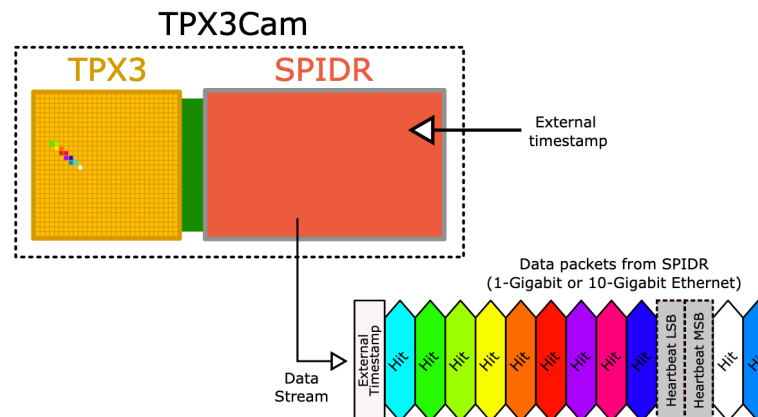

THGEM Characterisation

Mean TPX3Cam ToT rate (calculated as the summed ToT of all hits in a run divided by the total duration of the run and measured in ADU per second) as a function of the electric field across the THGEM. A single function—comprising a combination of linear and exponential functions is fitted to the data



Energy Calibration and Resolution

Simply the conversion between the incident light intensity in ADU and the corresponding physical energy in MeV

Through-going muons are ideal for calculating this calibration, they are minimum-ionising particles (“MIPs”) with a well-known mean energy deposition rate, dE/dX , of 2.12 MeV/cm

The summed ToT is calculated across all hits which comprise each event, and this summation is divided by the 3D track length of the through-going track.

The energy resolution, defined as the Landau (eta) and Gaussian (sigma) widths combined in quadrature and expressed as a fraction of the MPV