

Status of RED-100 experiment

D.Yu. Akimov^{1,2} on behalf of the RED collaboration

1 State Scientific Centre of Russian Federation - Institute for Theoretical and Experimental Physics of National Research Center "Kurchatov Institute" (ITEP), 25 Bolshaya Chermushkinskaya str., 117218, Moscow, Russian Federation

2 National Research Nuclear University "Moscow Engineering Physics Institute (MEPhI), 31 Kashirskoe shosse, 115409, Moscow, Russian Federation



Tel.: +7-499-789-6406; fax: +7-499-127-0833.
E-mail address: akimov_d@itep.ru



Abstract.

We propose a new experiment RED (Russian Emission Detector) to detect neutrino-nucleus neutral current scattering with two-phase noble liquid detector (LXe/LAr; LXe as a basic option). For experiment based on nuclear power plant reactor the expected nuclear recoil signal is in the ~1 keV range where responses of liquid Xe and liquid Ar are not known. The expected signals and backgrounds are presented for the high and low assumptions on the nuclear recoil specific ionization yield in the liquid noble gas and for two detector options: with liquid Xe and liquid Ar. A detector design of RED-100 experiment (100 kg of LXe) is presented. As a first step, we plan to measure LXe and LAr responses at keV region using quasi-monoenergetic neutron beam at the MEPhI research nuclear reactor.

Coherent neutrino scattering

Coherent neutrino scattering is a fundamental process predicted by the Standard Model:

$$\nu + A \rightarrow \nu + A$$

However, it has not been detected yet due to experimental difficulties: the energy deposition is in keV region, and the detection mass must be significant, of an order of several tens of kg or even more.

The differential cross section is given by the formula:

$$\frac{d\sigma}{dE_r} = \frac{G_F^2}{4p} Q_W^2 M \left(1 - \frac{ME_r}{2E_\nu^2} \right) F^2(Q^2),$$

where G_F is the Fermi constant, $F(Q^2)$ is the form factor at four-momentum Q and $Q_W = N - (1 - 4 \sin^2(\theta_W))Z$ is the weak charge for a nucleus with N neutrons and Z protons, θ_W is the weak mixing angle.

The process plays important role in astrophysics (supernova explosions).

If the cross section is different from the predicted one, it may be an indication of the new physics.

Possible important practical application is nuclear reactor monitoring.


We consider two sites for the experiment

At spallation neutron source (SNS, Oak Ridge National Laboratory, USA)




Proton beam energy - 0.9 - 1.3 GeV
Intensity - 9.6×10^{13} protons/sec
Pulse duration - 700 ns
Repetition rate - 60 Hz
Liquid Mercury target


$1.9 \cdot 10^{22}$ year⁻¹ neutrinos each of three flavor (ν_e, ν_μ, ν_τ):
 $5 \cdot 10^6$ cm⁻²s⁻¹ at 40 m from the target

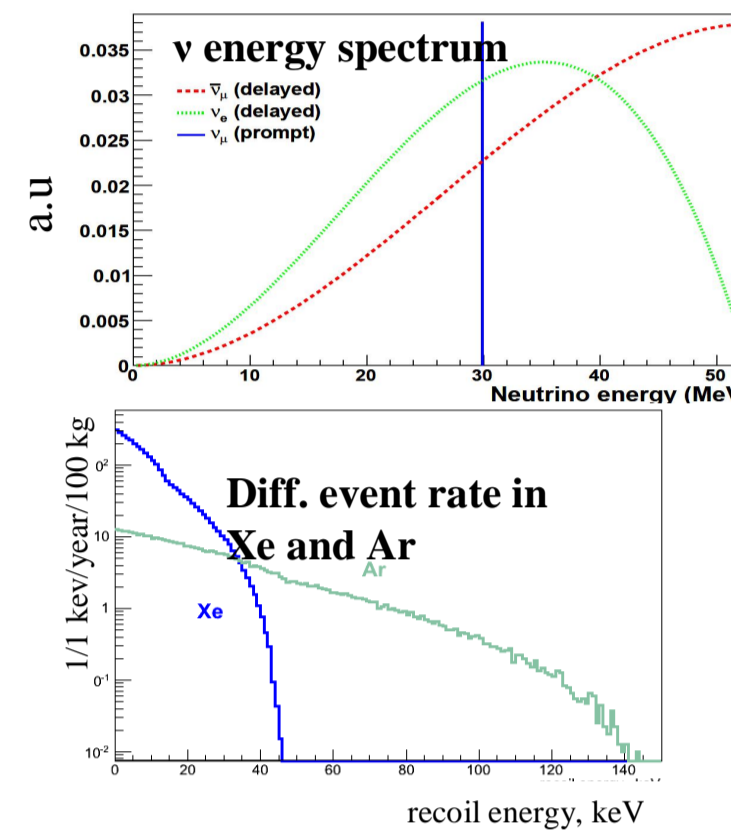

At a nuclear power reactor (Kalininskaya power station, Russian Federation)

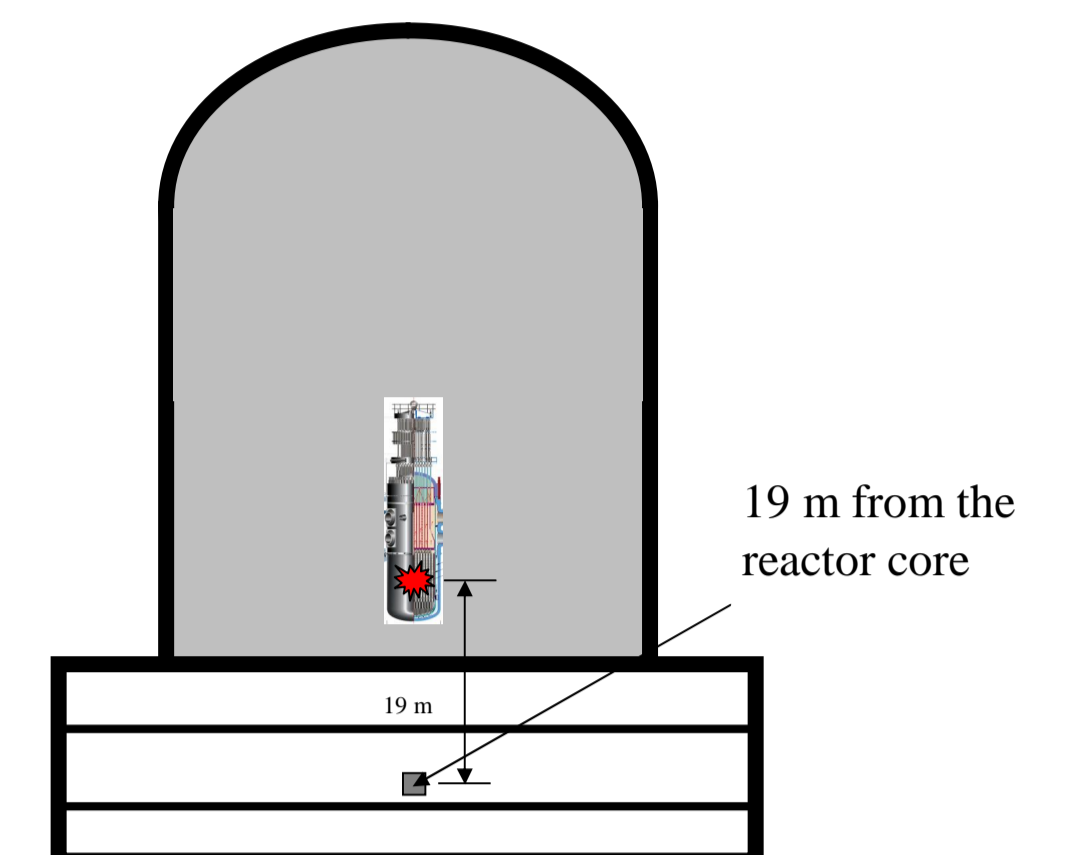


$\bar{\nu}_e$: $1.35 \cdot 10^{13}$ cm⁻²s⁻¹ at 19 m from the reactor

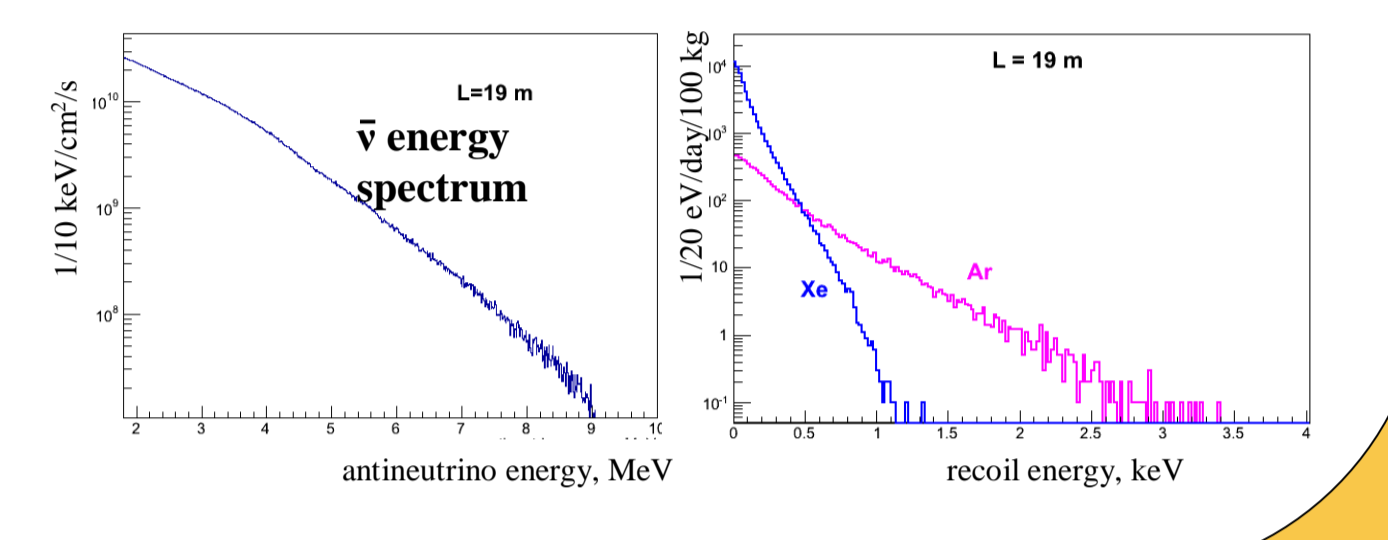

Detector RED-100 (~100 kg of LXe in FV, ~250kg total)

Russian Emission Detector

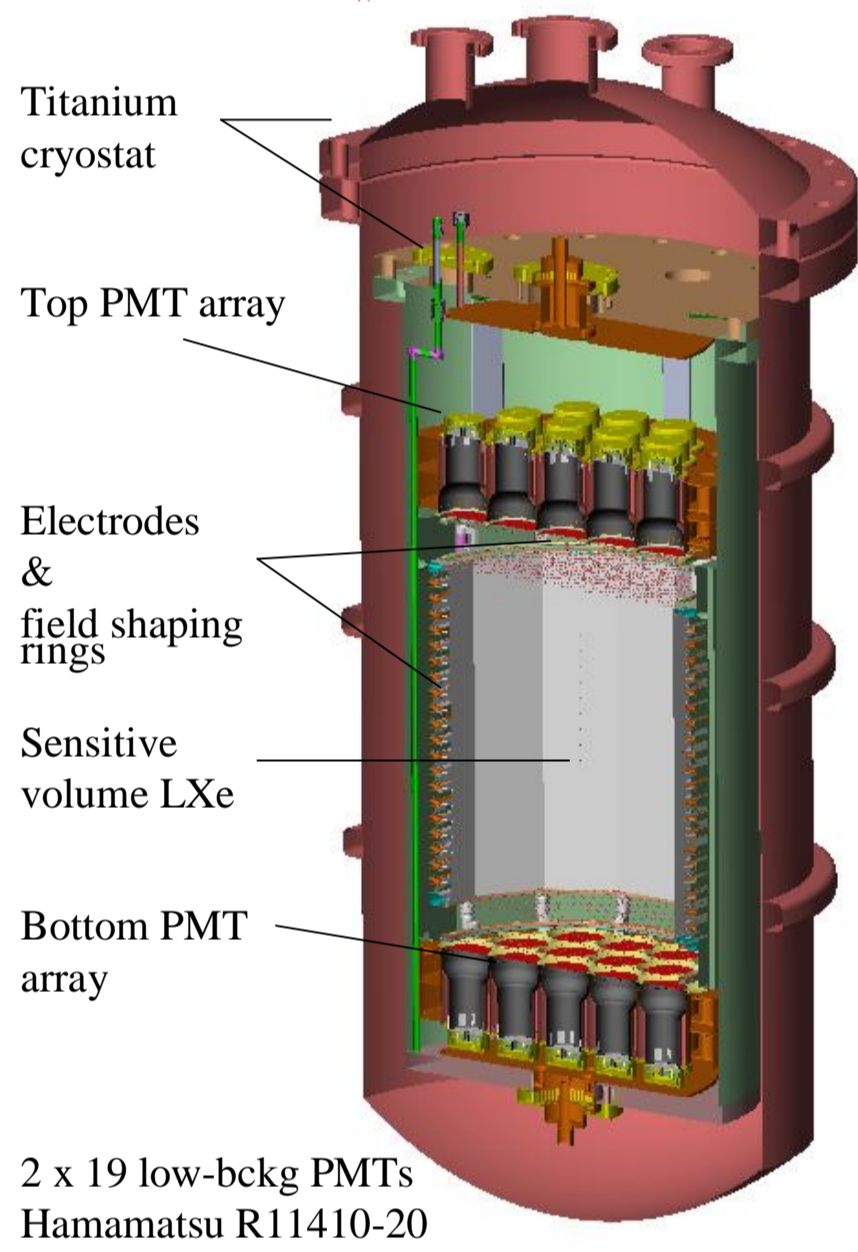

RED-100 is a two-phase noble gas emission detector. A two-phase emission detector is a TPC with a condensed noble gas as a detection medium and a readout via electroluminescence (EL) in a gas phase.

The sensitive volume will have ~45 cm in diam. and ~45 cm in height, will be defined by the top and bottom optically transparent mesh electrodes and thin field-shaping rings.

Drift field is 0.5 ± 1 kV/cm. Extraction field, and the field in EL region is $\sim 7 \pm 10$ kV/cm (in the gas phase).

PMTs are Hamamatsu R11410-20 (low-background)

Depth of the EL region - 1 cm. The expected number of photoelectrons per one electron extracted to the gas phase in this region is ~80.

The detector will be placed in a passive borated polyethylene and lead shield + active muon veto.



The significant background is spontaneous emission of single electrons (SE) from the surface with a rate of several tens Hz. We consider two values of the count rate of such events:

- ~ 10 Hz as in E. Santos et al., JHEP 1112 (2011) 115; e-Print: arXiv:1110.3056 [physics.ins-det].
- ~ 100 Hz



The events of ν -N scattering will be selected by triggering to $N_e > 2$, where the SE background is negligible.
XY mapping will allow one to reduce the background of accidental coincidences of spontaneous SE by a factor of 10.

Expected recoil spectra

Experimental data on ionization yield for NR are available for ≥ 4 keV for LXe. There are no experimental data for LAr

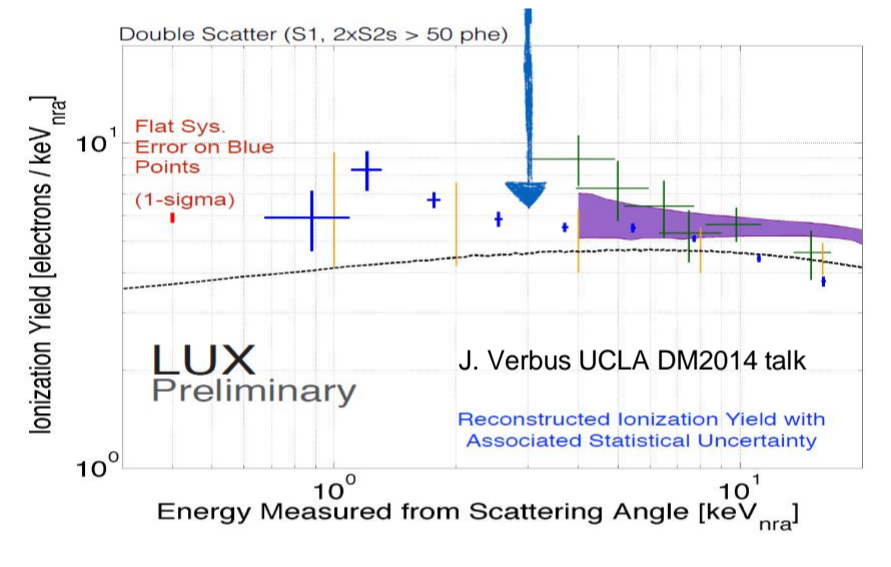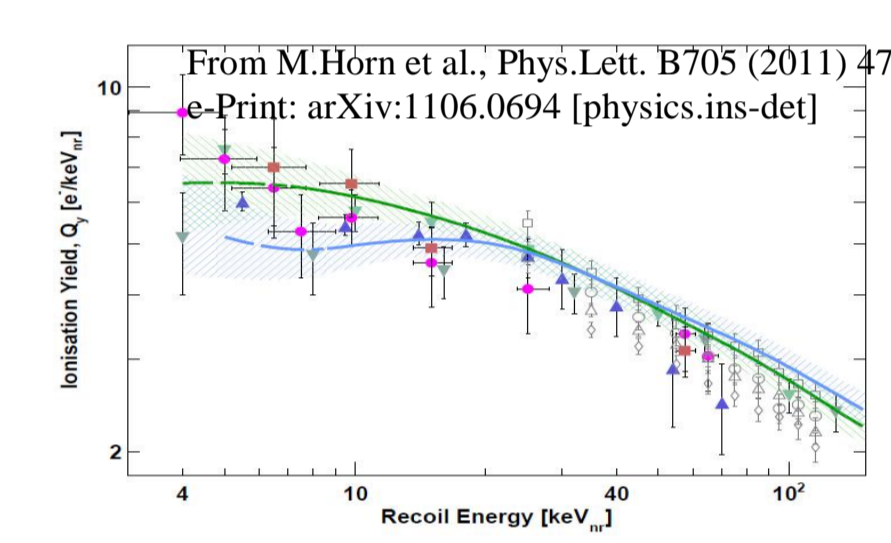


For our simulations we used a fit of the existing data with $12.5 \cdot E^{0.54}$ (E in keV) for $E > 4$ keV and for $E < 4$ keV a smooth function going to "0"

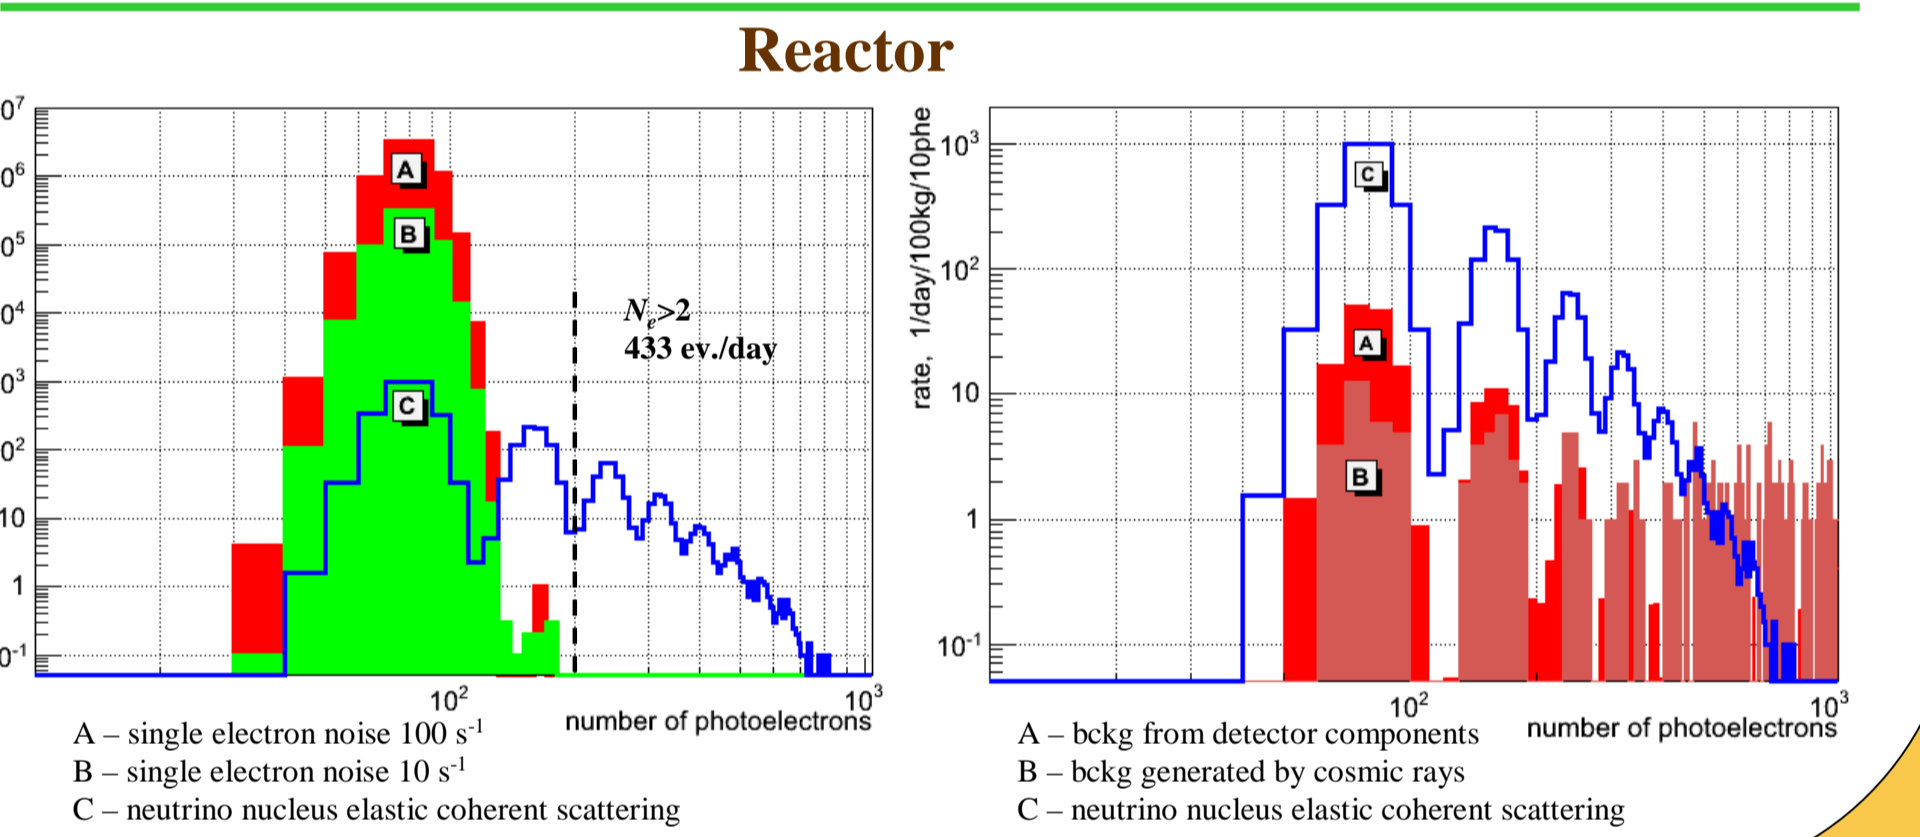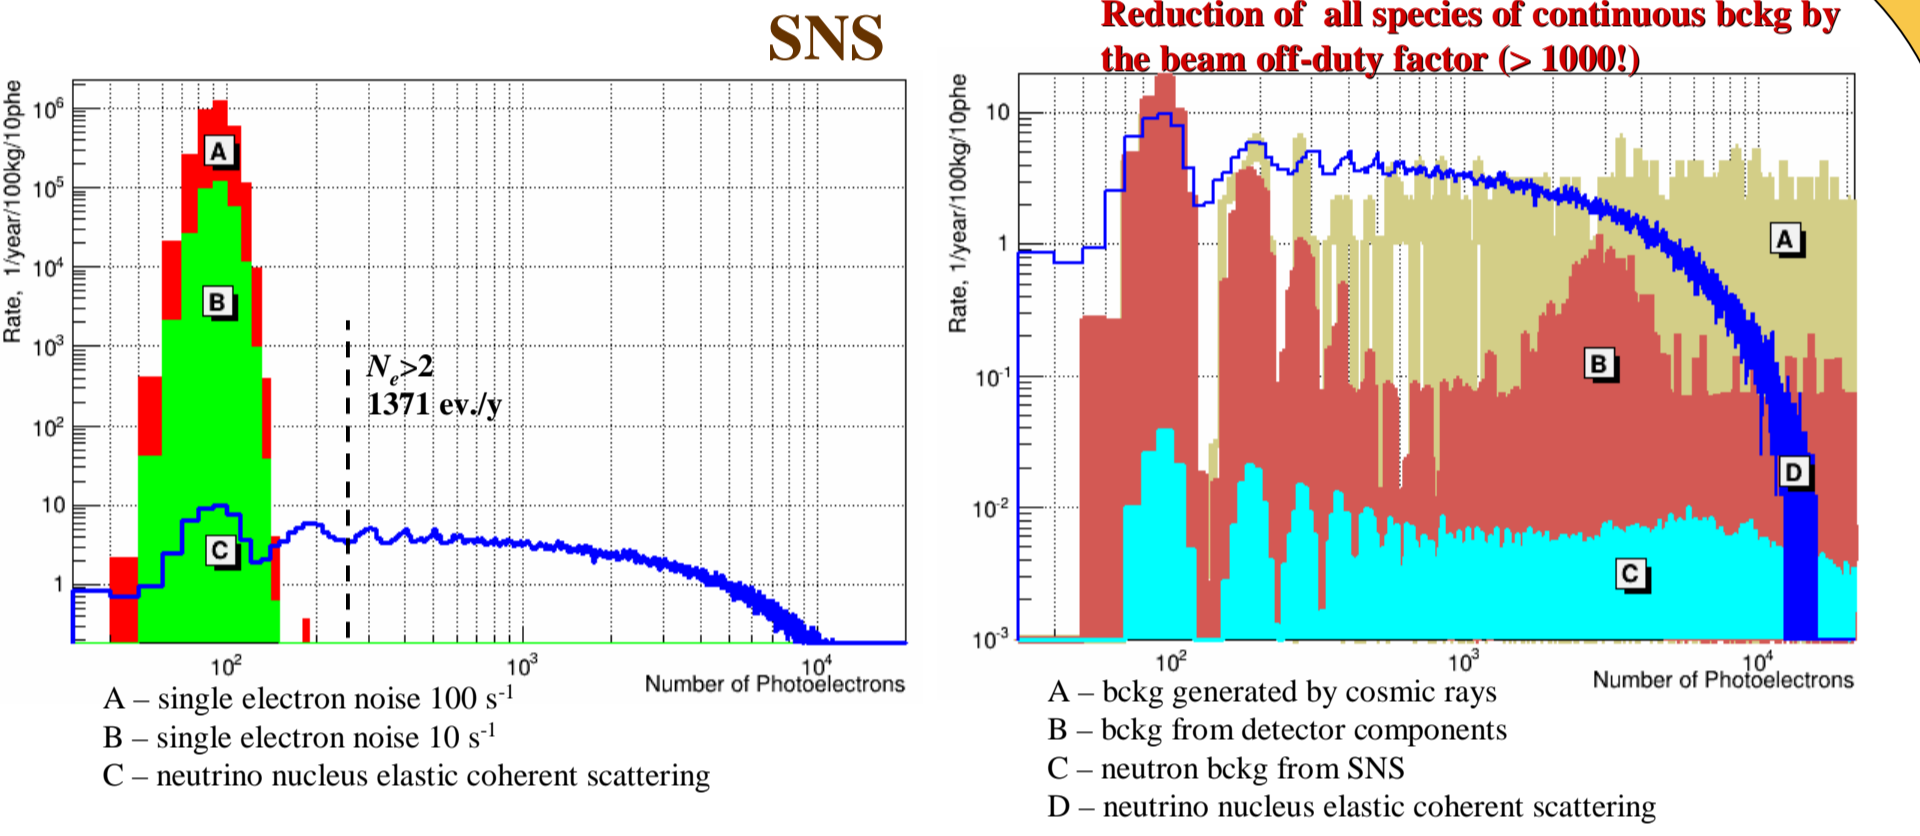

Gas system of RED-100 is completely assembled

Xe (250 kg) is delivered to the gas system (depleted from ¹³⁶Xe ¹³⁶Xe => EXO-200)
Xe is from the same batch that was used in ZEPLIN-III
40-y old => 85Kr concentration is reduced by a factor 16 rel. to initial level
According to ZIII underground measurements this Xe is equivalent to the present-day Xe with 150 ppt of Kr


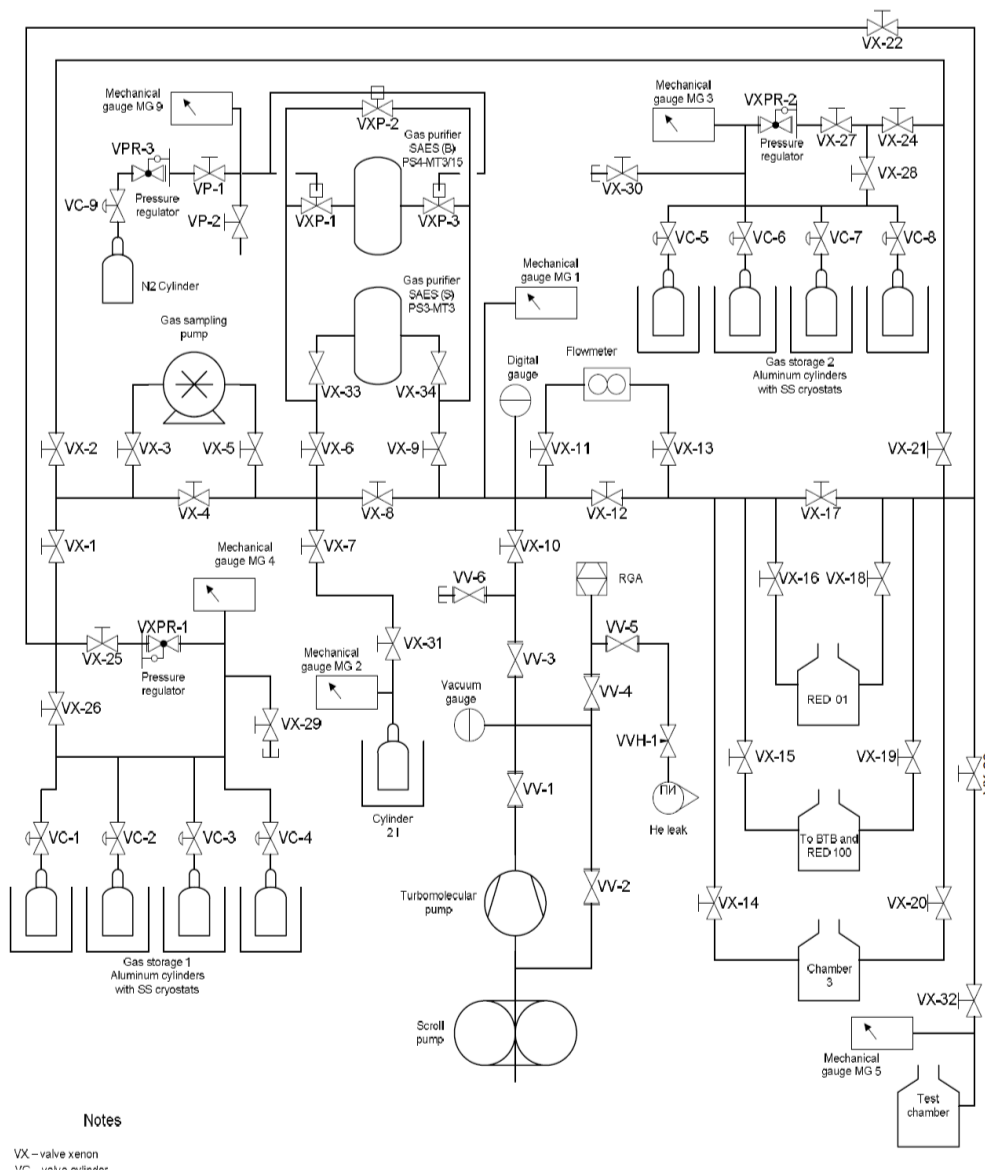


Electron lifetime measurements have started



PMT characterization

Hamamatsu R11410-20 - 3"

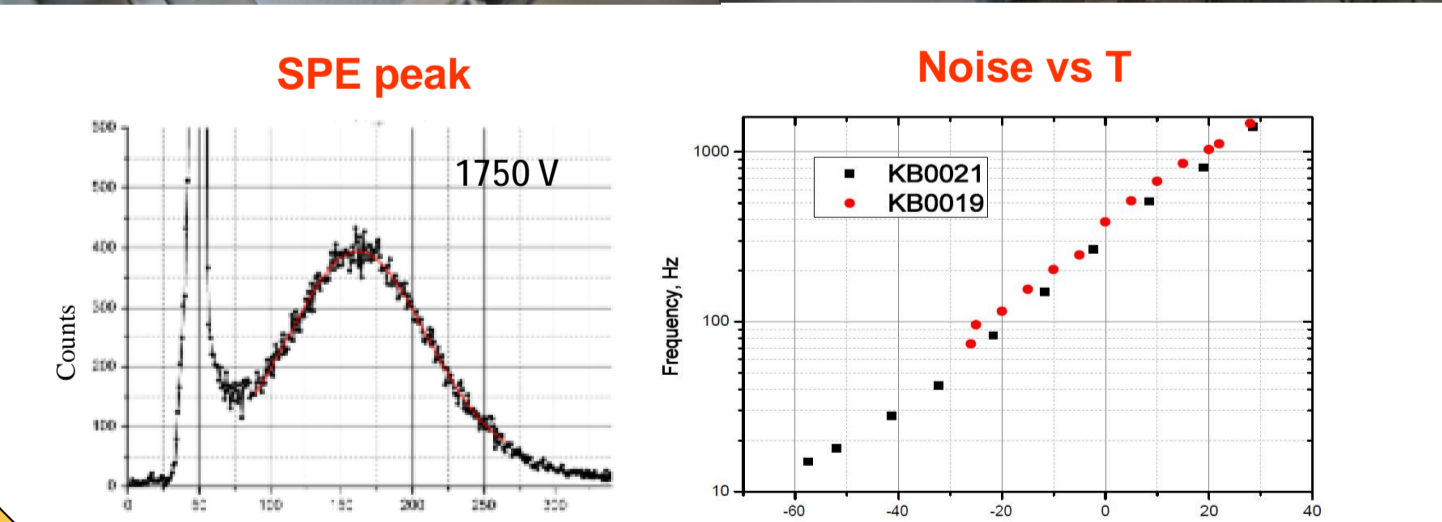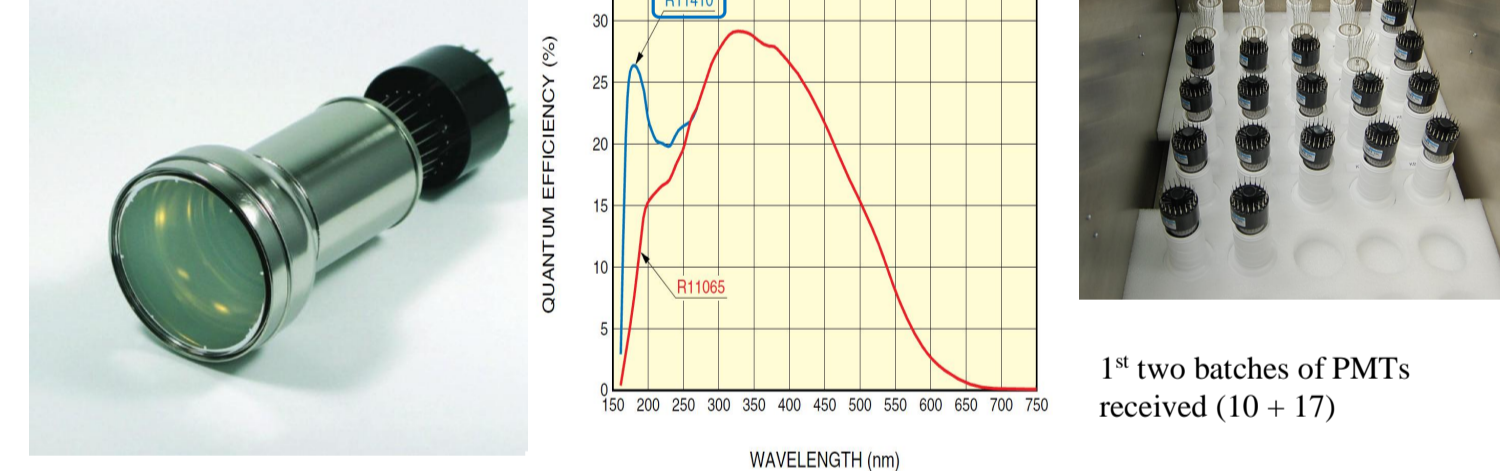


Thermosyphon assembling




To be connected to detector

Active PMT base (divider) - to prevent photocathode aging from huge electroluminescent pulses produced by muons.

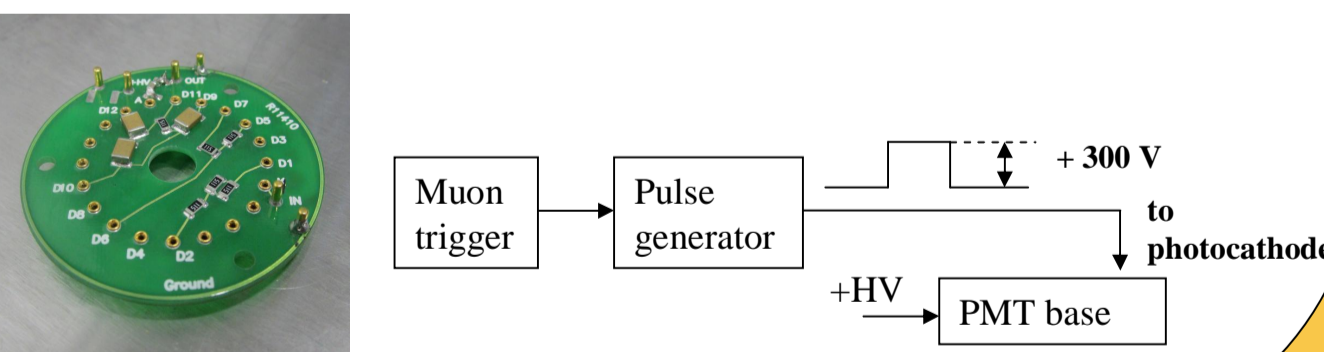


Detector & Cryostat

The inner structure is ready for cleaning and assembling

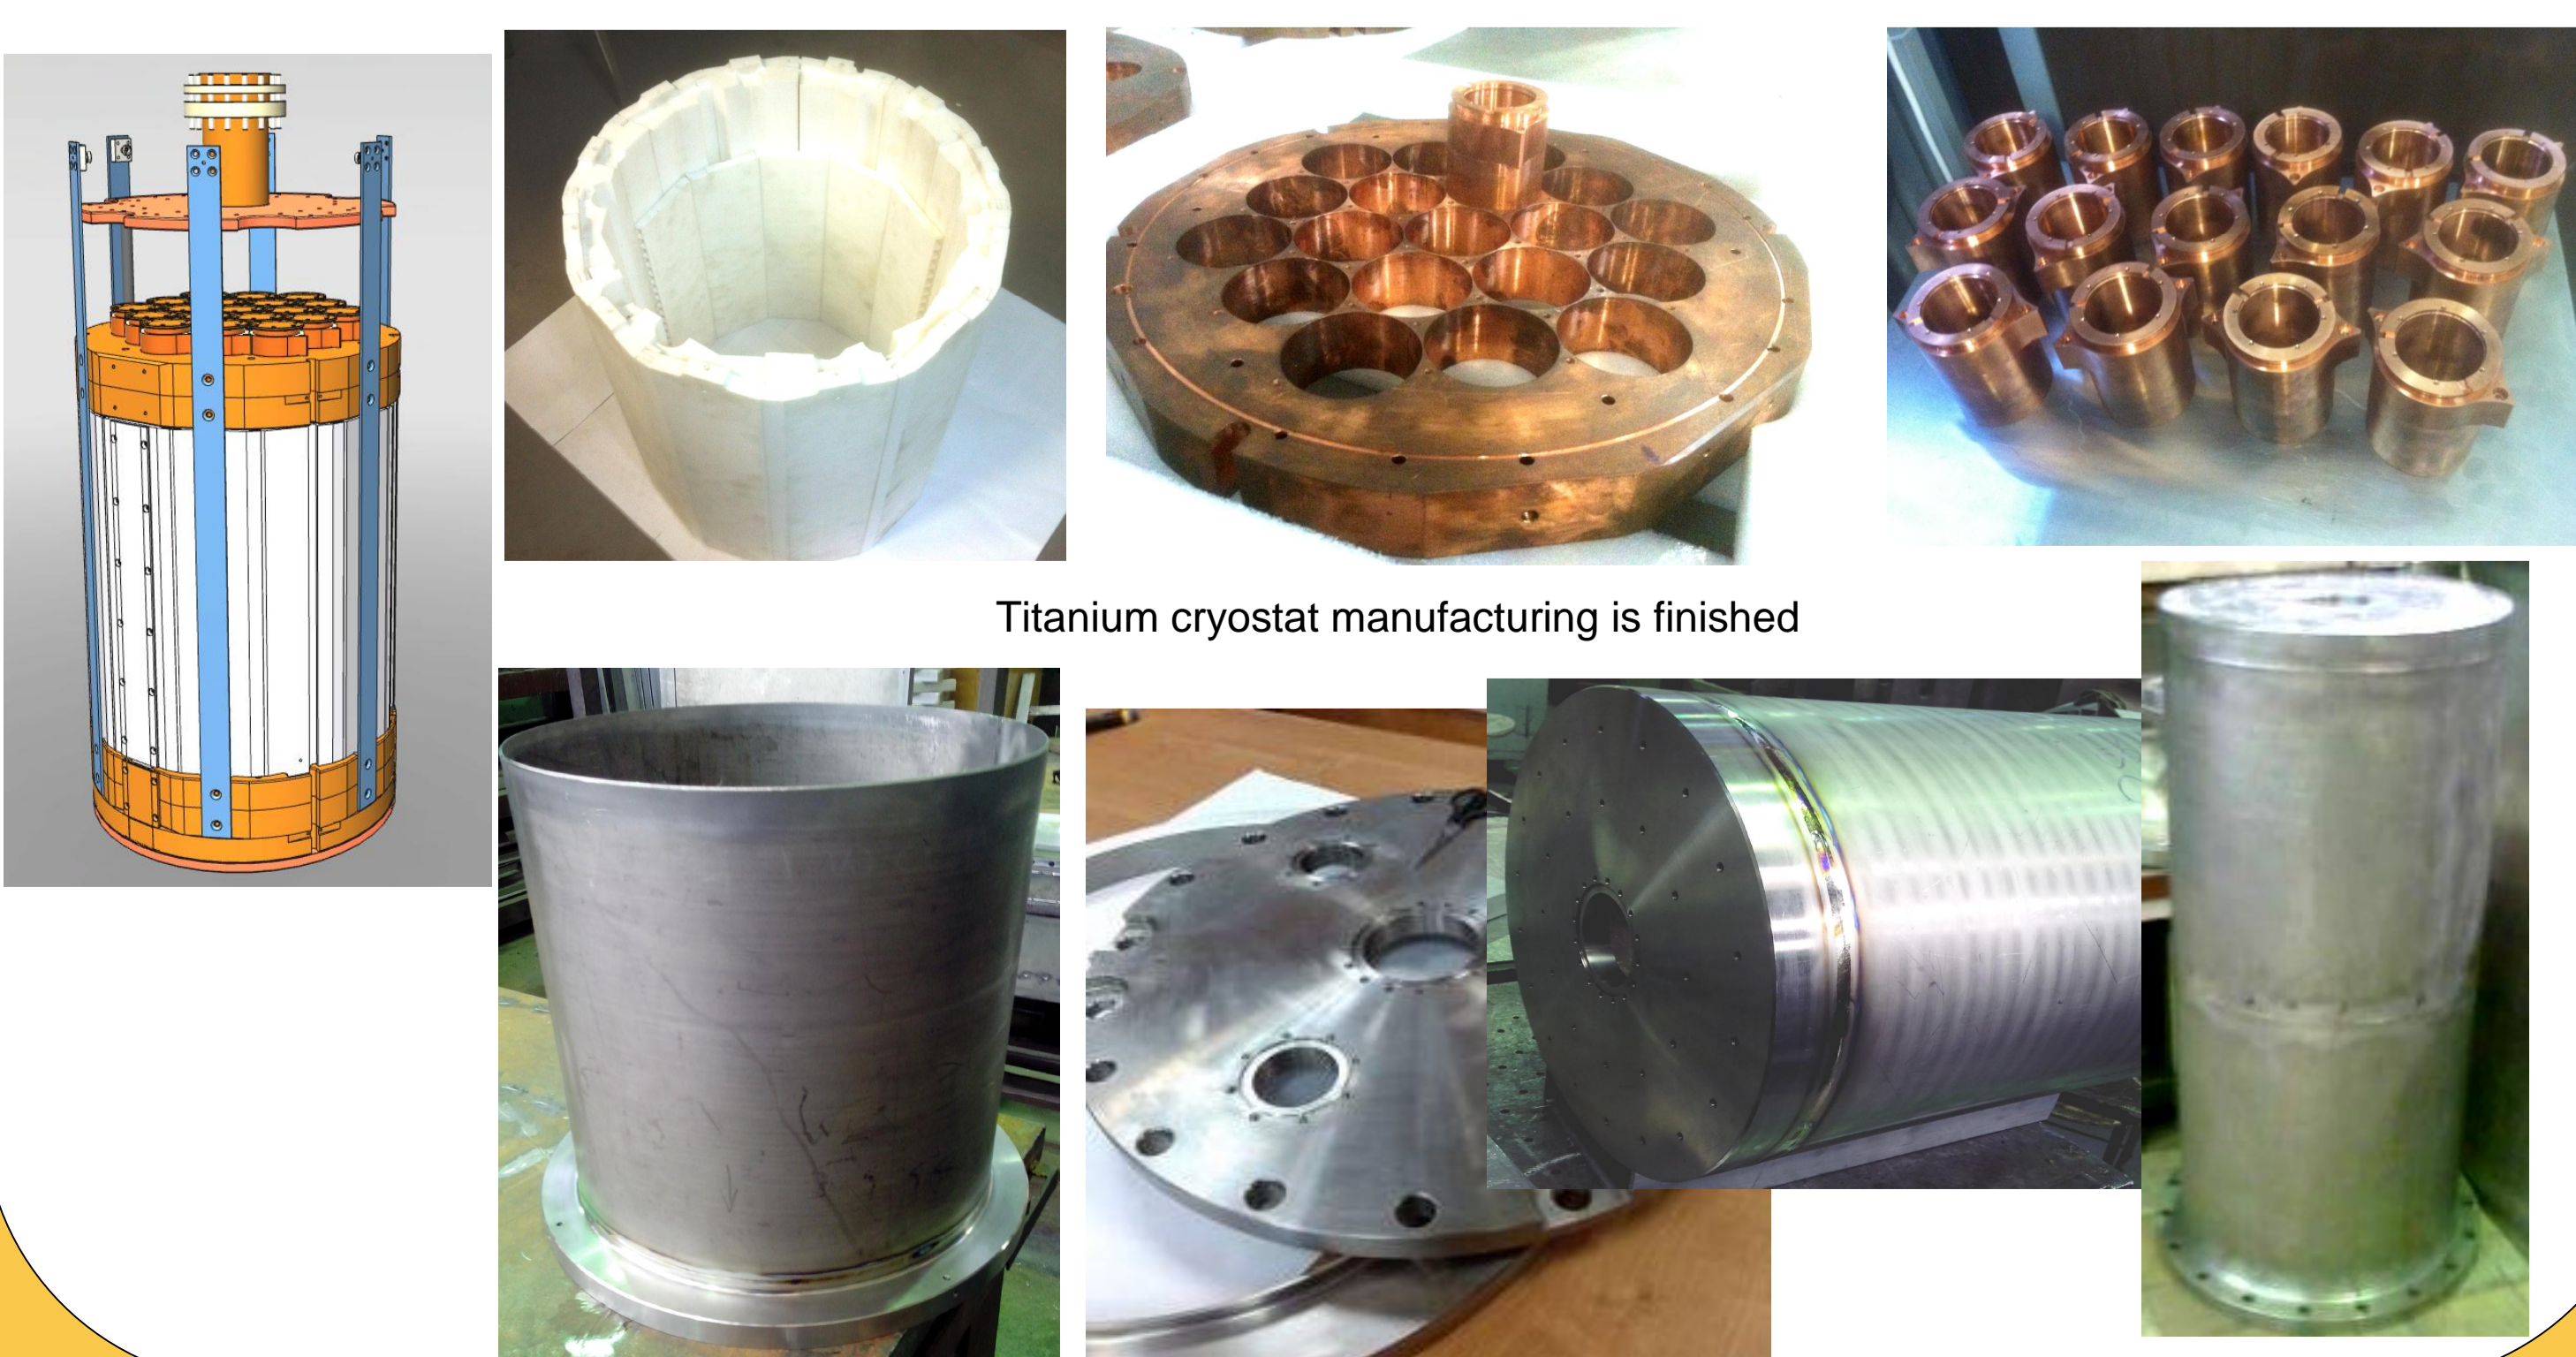


Detector prototype (RED-1)

At the moment, the prototype is deployed at a 24-keV neutron beam of MEPhI research nuclear reactor ready to start measurements of the LXe to sub-keV nuclear recoils. Waiting MEPhI reactor ON.
A detector was built a decade ago as a full-functional prototype of the ZEPLIN-III dark matter detector. The depth of the LXe between the cathode and the surface of LXe is 22 mm, the diameter of the target is 105 mm, the electroluminescence gap (between the surface of the LXe and the anode) is 5 mm.
The UV-sensitive MgF₂-windowed PMTs FEU-181 (not low-background) by MELIS production are used to detect the Xe 175-nm emission (QE 15%, multi-alkali photocathode, 30 mm diam.).

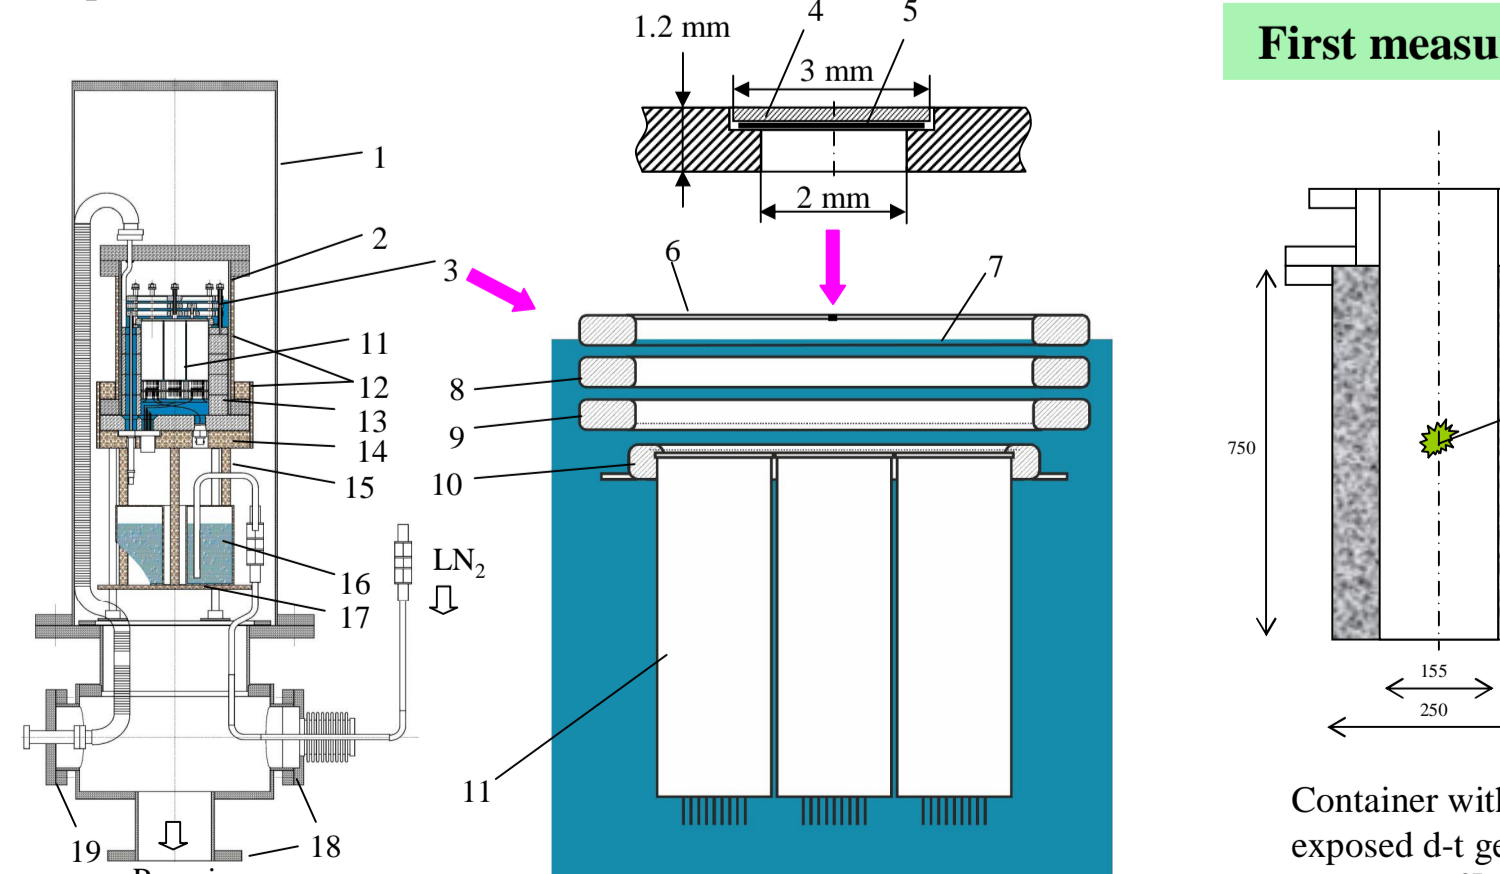

1 - warm vessel; 2 - cold vessel; 3 - electrode system; 4 - ²⁴¹Am source; 5 - stainless steel foil (200 μm); 6 - anode; 7 - LXe surface; 8 - field shaping ring; 9 - wired cathode (0.1 mm diam., 1 mm pitch); 10 - wired grid (0.1 mm diam., 1 mm pitch); 11 - PMTs; 12 - copper jacket; 13 - stainless steel LXe displacers; 14 - copper base plate; 15 - thermo-conducting copper fingers; 16 - container filled with liquid nitrogen; 17 - copper base plate; 18 - vacuum ports.

First measurement of LXe ionization response to electron recoils below 100 keV

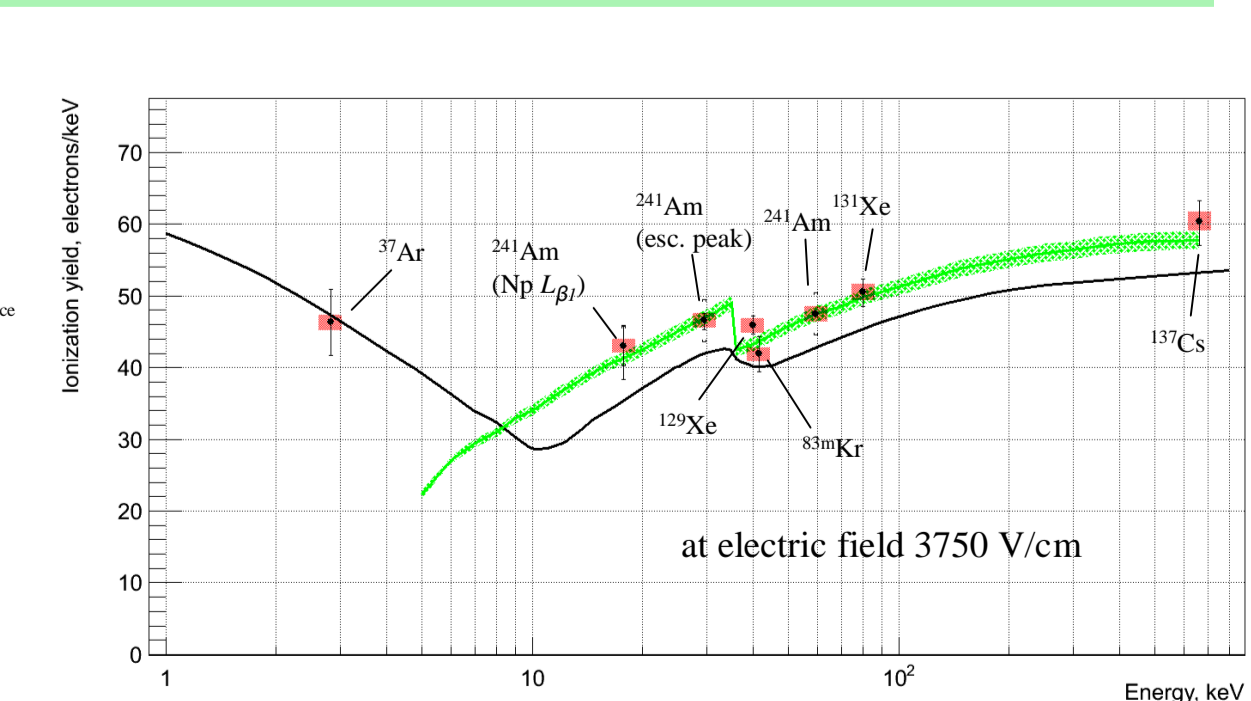

Green - Zh. Tekh. Fiz. 59, 1989, p. 186 normalized to ¹³⁷Cs 662 keV using $W = 15.6 \pm 0.3$ eV from Phys. Rev. A 12 1975, 1771. Data (without ³⁷Ar point) are fitted to Green curve with vertical scale factor as a free parameter; green and red bands come from ± 0.3 eV.

Black - NEST (Noble Element Simulation Technique); <http://nest.physics.ucdavis.edu/site/>

NEST gives the right prediction of ionization yield at low energies (below ~10 keV)