A Detector for *n-nbar* Oscillations in the NNBarX Experiment: Specifications and Challenges

A. R. Young, D. G. Phillips II, and R. W. Pattie, Jr.
North Carolina State University
Triangle Universities Nuclear Laboratory
on behalf of the NNBarX Collaboration

Overview

- ILL Detector Review
- NNBarX Goals
- NNBarX Detector Specifications & Considerations
- R&D Outlook
- Path Forward and Summary

ILL Layout

- Free neutron *n-nbar* search experiment in 1989 - 1991 at ILL [1]:

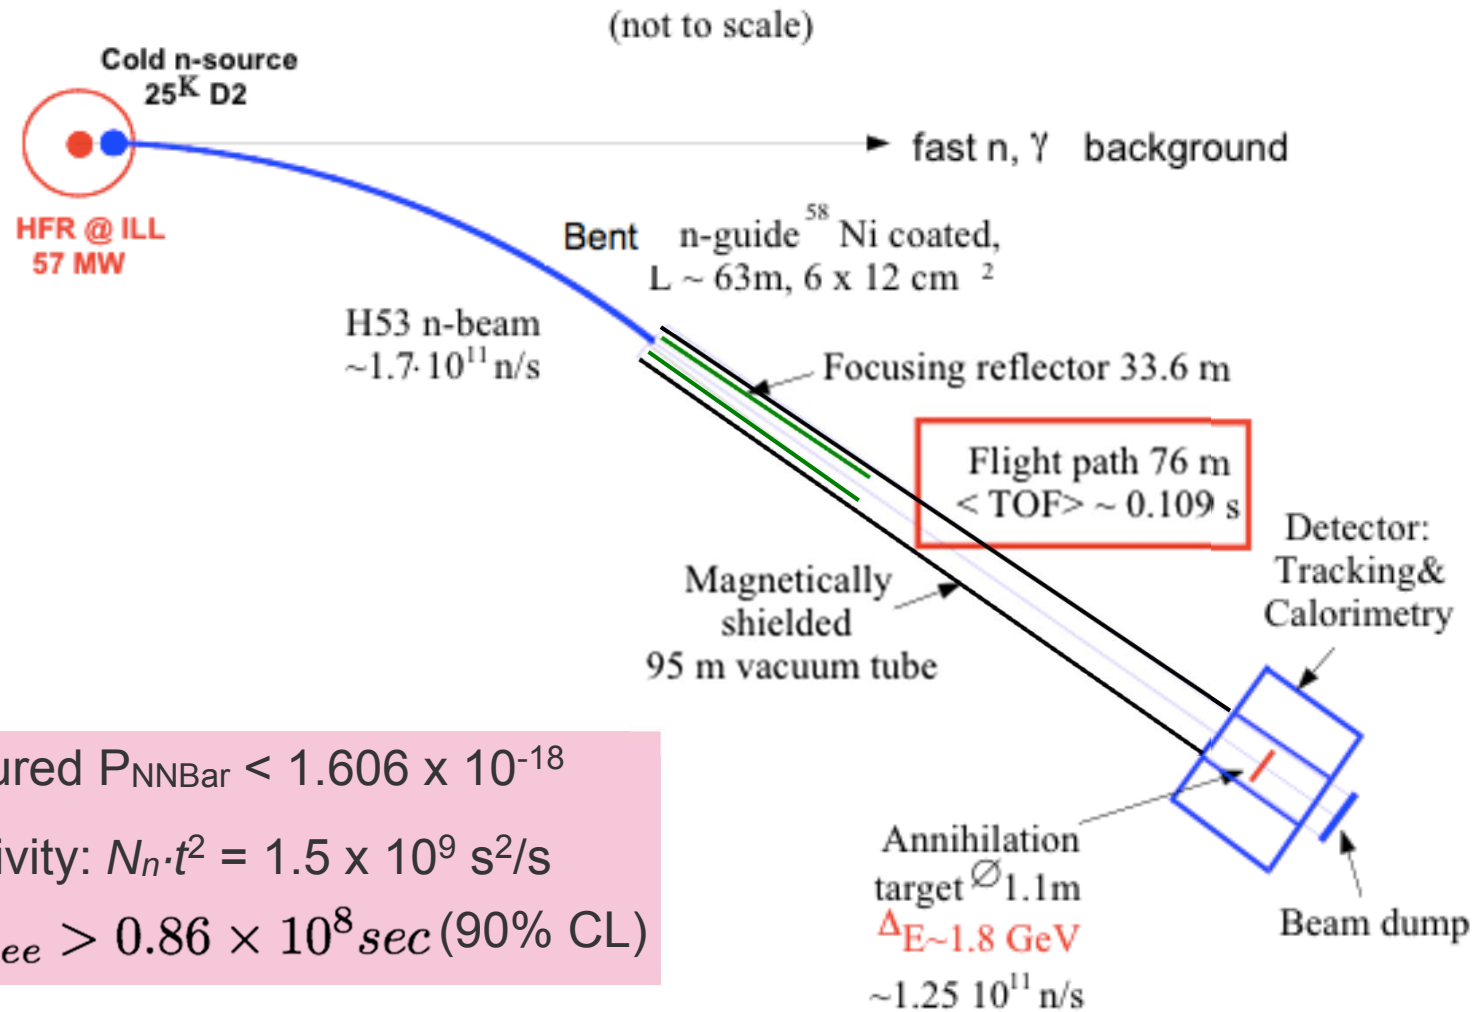

measured $P_{NNBar} < 1.606 \times 10^{-18}$

sensitivity: $N_n \cdot t^2 = 1.5 \times 10^9$ s²/s

$\tau_{n\bar{n},free} > 0.86 \times 10^8 sec$ (90% CL)

ILL Experiment: general background and detector strategies

Backgrounds :

- Bent ^{58}Ni *n*-guides to eliminate γ's & fast *n*'s from reactor
- Complete containment of *n*-beam in propagation region
- 8 rings of ^{10}B-enr. glass in drift vessel (absorb vertically falling *n*'s), ^{6}LiF beam dump

Detector:

- High detection efficiency for annihilation events in target (4-5 pion "star")
- Combine tracking, timing, calorimetry to reject backgrounds

ILL Detector Configuration

- Effective run time = 2.4×10^7 s, $N_{events} = 6.8 \times 10^7$.
- *n-nbar* detection efficiency ($\Delta\Omega/4\pi$ = 0.94): 52% ± 2%.
- **No background** & no candidate events after analysis.

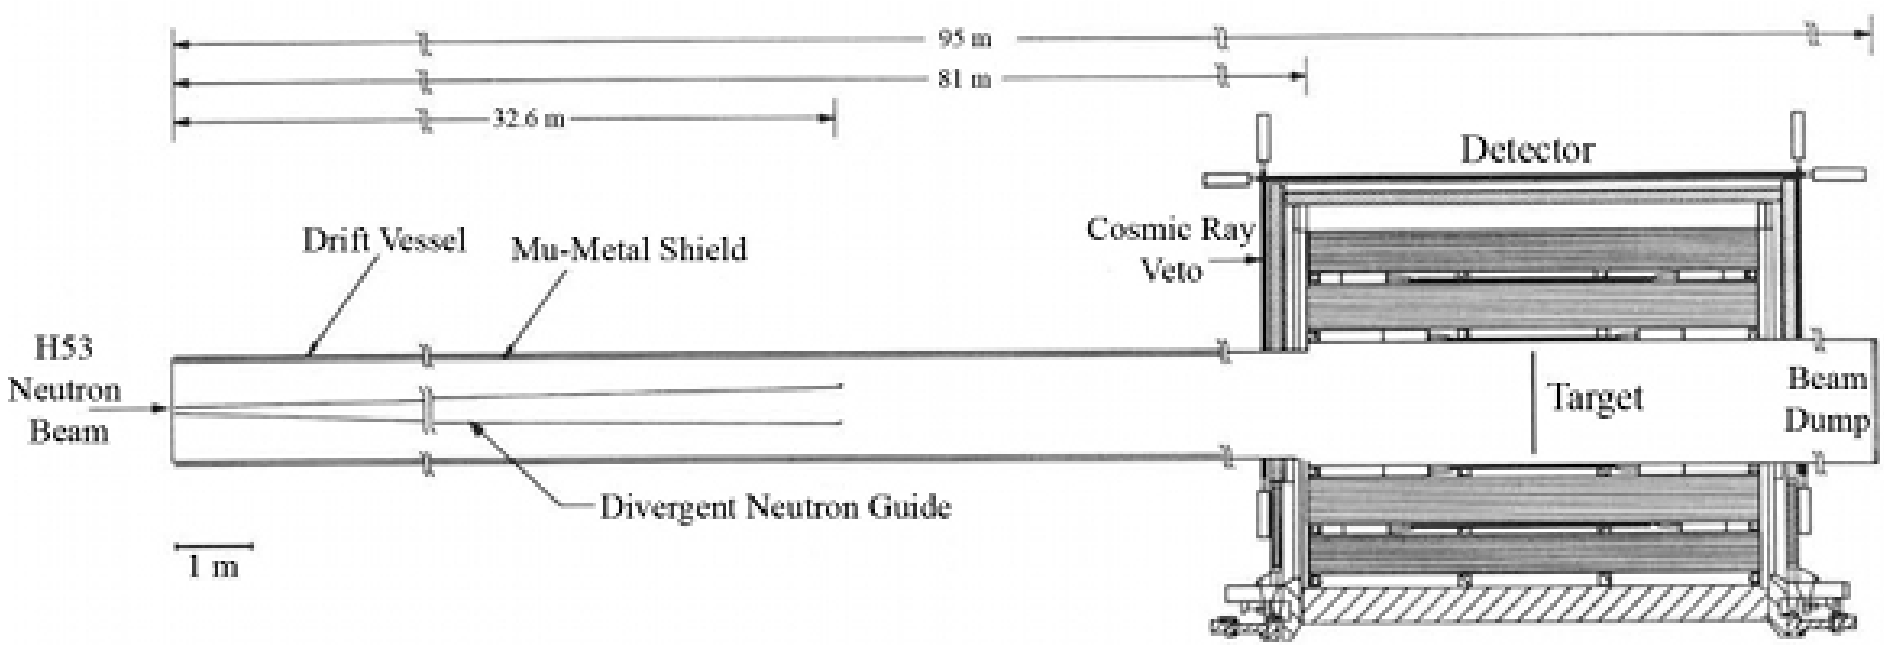

ILL Detector Configuration

ILL Target [2,3]: 130 μm thick.

$$\sigma_{annihilation} \sim 4\mathrm{Kb}$$
$$\sigma_{nC,capture} \sim 4\mathrm{mb}$$

ILL Scintillator Counters [4,5]:

$$\sigma_{TOF} \sim 600\mathrm{ps}$$

ILL Vertex Detector [6]:

10 LST planes operated at 4.6 kV
Vertex = ± 4 cm$\rho = 0.3\mathrm{g/cm}^3$

ILL Calorimeter: 12 LST planes interleaved w/Pb & Al plates.

ILL Cosmic-Ray Veto (CRV)

6.0x10^4 electronics chnls.

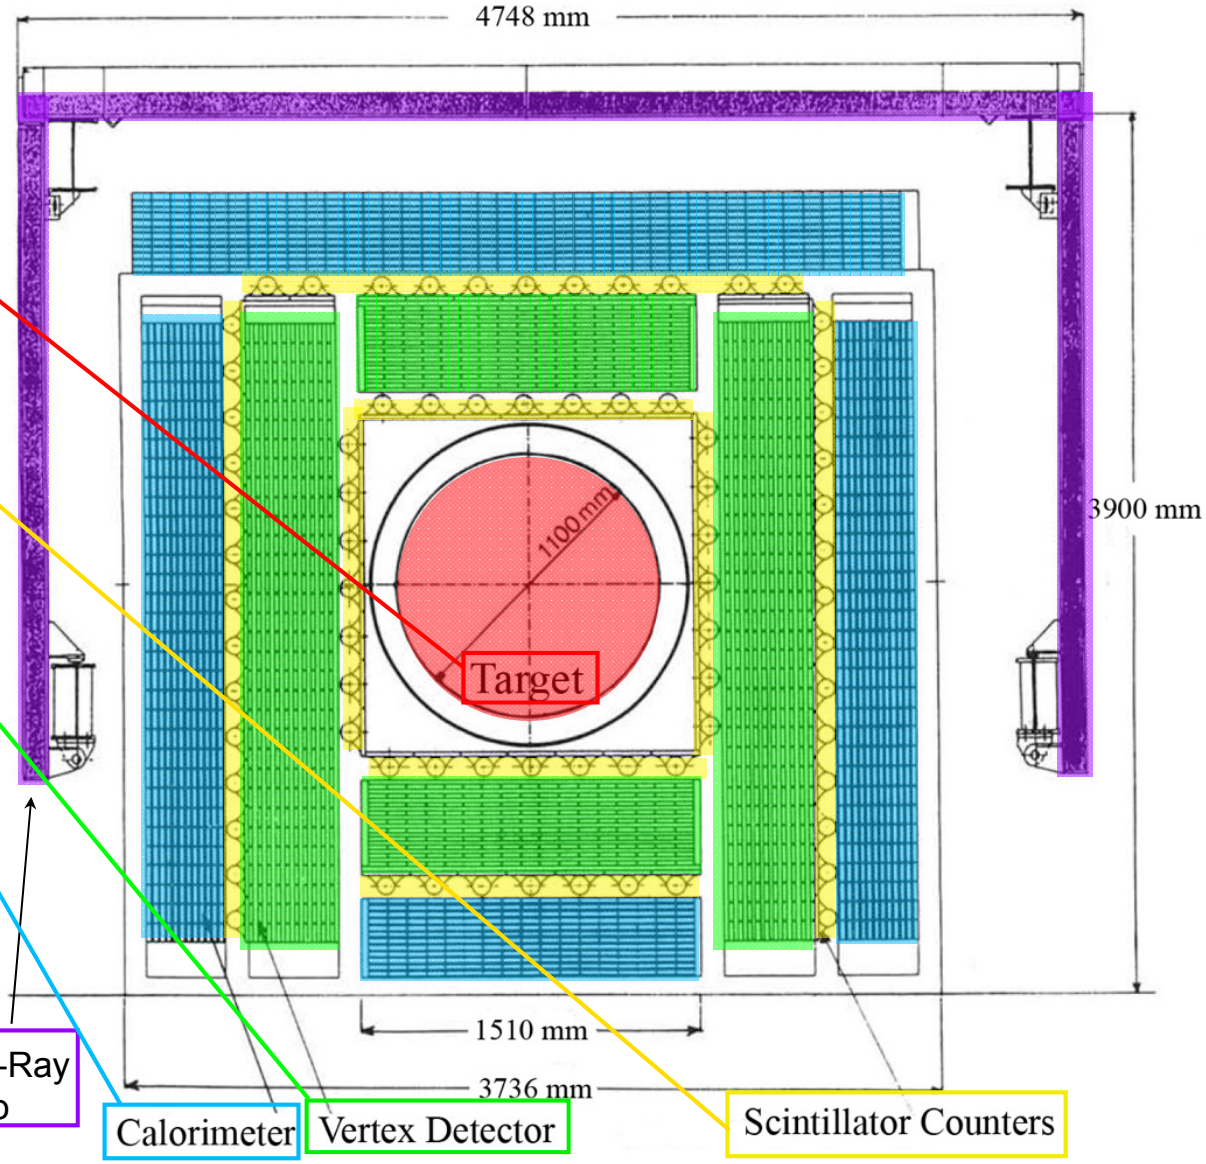

LST Characteristics

- One application of the limited streamer tube (LST) is the Iarocci tube [6,7].

- conducting cathode surface.

- equiv. to single wire drift chamber.

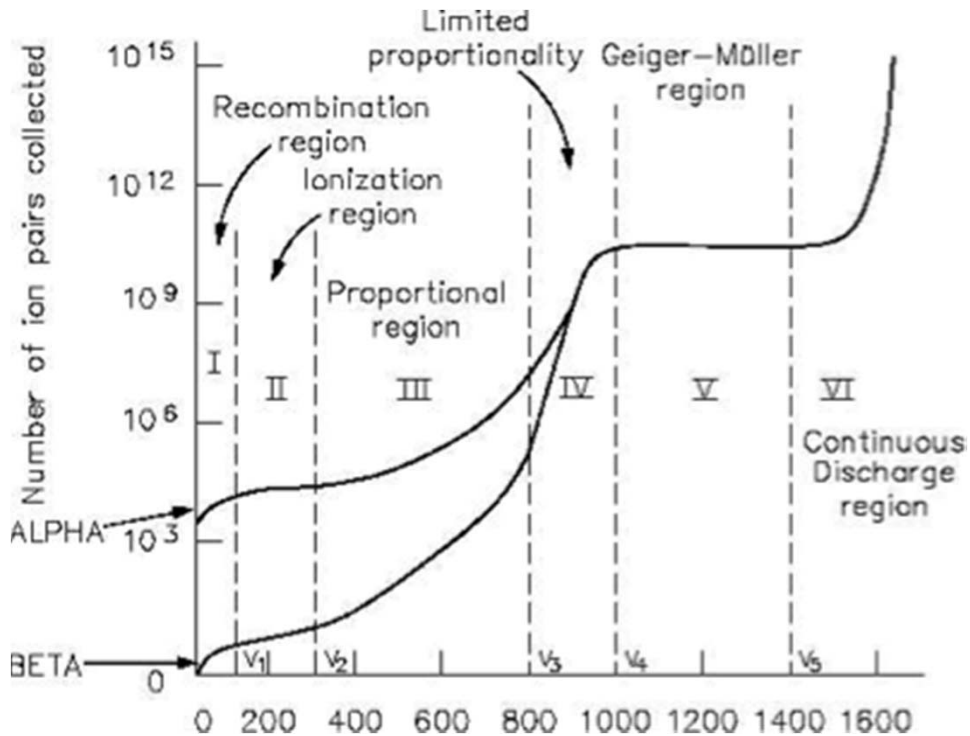

- Long (recent) history of usage in large experiments to detect muons: *CLEO* [8], *OPAL* [9,10], *ZEUS* [11], *D0* [12,13,14], *BaBar* [15].

ILL Triggers, Cuts, Acceptance

1 MHz raw triggers due to capture gammas…

Trigger Requirement	Trigger Rate (Hz)
1) Coinc. Of Inner & Outer SC (same det. quad.) in anticoinc. w/CRV.	2000
2) Cond. 1) + 1 track in same vtx. det. quad. as SC coinc.	800
3) Cond. 2) + 1 SC hit (diff. quad.) + 2nd track (in vtx. det. or calor.)	6
4) Cond. 3) + ≥ 120 hits in LST det. (> ~400 MeV)	4

A little over ½ due to spurious, γ-induced triggers
rest essentially due to cosmics

ε_{trig} = 77%

SW Filter Requirement	Data Acceptance	MC Acceptance
2.0 GeV > E_{vis} > (0.87 ± 0.17) GeV, R_{orig} ≤ 80 cm	10.0%	85.0%
TOF: $T_{SC,OUT} - T_{SC,IN}$ < 5 ns	16.4%	96.0%
Vertex: R_{orig} ≤ 60 cm, |z| < 32 cm, θ_{track} > 170°	1.2%	89.0%
Total	0.018%	72.0%

ε_{filter}

ILL Triggers, Cuts, Acceptance

N_{events} surviving SW Filter: 1.2×10^4

Analysis Requirement	Remaining Events
Incorrectly reconstructed vtx. (visual inspection)	403
Charged CR	335
$R_{orig} \leq 55$ cm, $\lvert z \rvert \leq 15$ cm	5
$E_{vis} > 800$ MeV	2
$y_{vb} > -60$ cm	0

$\varepsilon_{analysis} = 95\%$

$$\varepsilon_{trig} \bullet \varepsilon_{filter} \bullet \varepsilon_{analysis} = (52 \pm 2)\% \text{ [1]}$$

Final cuts correspond to: $E_{thresh} >$ ~800 MeV, at least 1 charged particle track, at least two “tracks”, vertex reconstructs to target

NNBarX Goals

- Adapt detector to cold neutron source driven by 1 MW spallation target with very large increase in flux due to concentrating optics
- Goal: **0 background events, ε > .5 for annihilation events**
- Challenges:
  - Fast backgrounds possibly present (pulse structure)
  - Larger CN fluxes may increase capture gamma rates
  - Affordability

NNBarX Detector Strategy

- Scale successful ILL geometry to larger beam and target size required for NNbarX
- Identify promising technologies for tracker and calorimeter, signal is ~5 π's from common vtx. (w/~200 MeV K.E. each), similar requirements to stopped kaon experiments (see E949)
- Evaluate candidate geometries with target performance specifications
  - Annhilation events, $\varepsilon > 0.5$
  - Improved vertex reconstruction ($\pm$ 1 cm)

NNBarX Annih. Event Simulation

Branching Fractions

$\bar{n}+p$		$\bar{n}+n$	
$\pi^+\pi^0$	1%	$\pi^+\pi^-$	2%
$\pi^+2\pi^0$	8%	$2\pi^0$	1.5%
$\pi^+3\pi^0$	10%	$\pi^+\pi^-\pi^0$	6.5%
$2\pi^+\pi^-\pi^0$	22%	$\pi^+\pi^-2\pi^0$	11%
$2\pi^+\pi^-2\pi^0$	36%	$\pi^+\pi^-3\pi^0$	28%
$2\pi^+\pi^-2\omega$	16%	$2\pi^+2\pi^-$	7%
$3\pi^+2\pi^-\pi^0$	7%	$2\pi^+2\pi^-\pi^0$	24%
		$\pi^+\pi^-\omega$	10%
		$2\pi^+2\pi^-2\pi^0$	10%

X-sections rescaled for ^{12}C

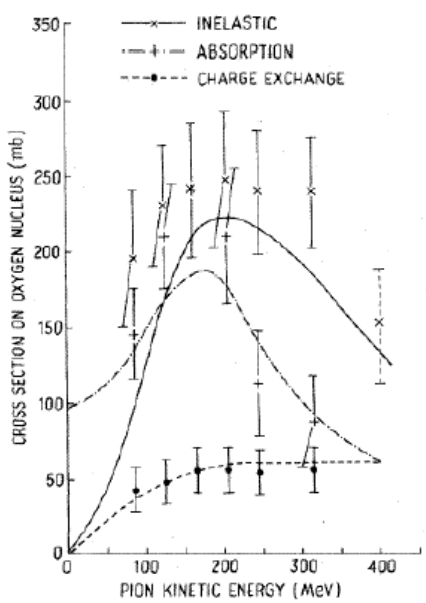

Annih. event generator based on IMB expt. code
(K. Ganezer, B. Hartfiel, CSUDH)

Annihilation Point

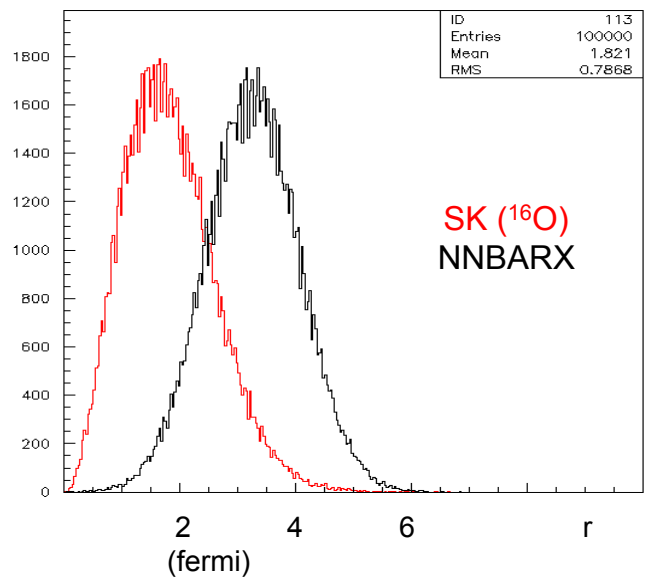

Inv. mass of mesons leaving nucleus

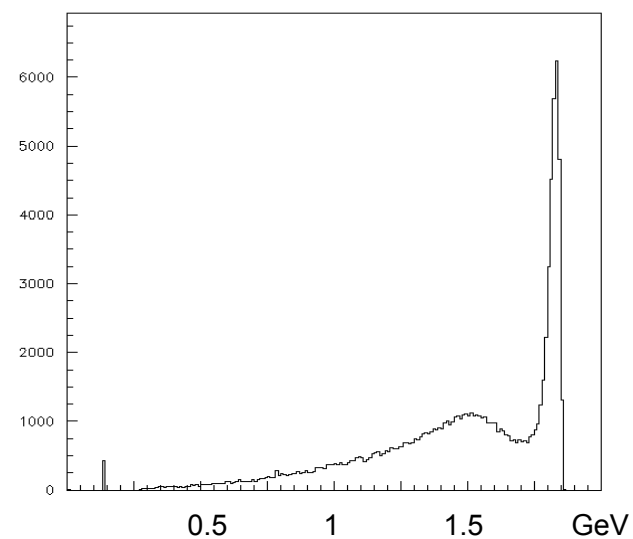

Detector simulation: GEANT4

Scintillator/Pb plate Calorimeter

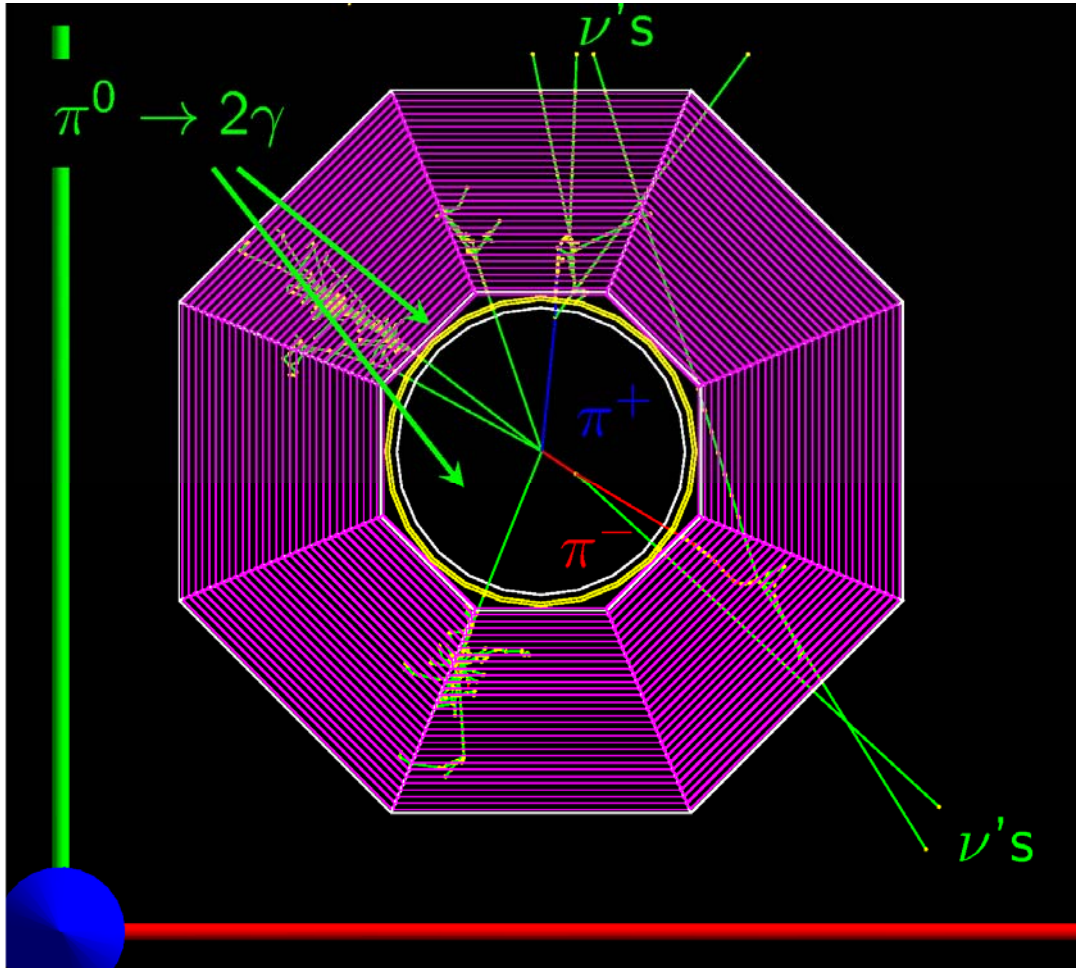

Fast Backgrounds

- Beam for Project X: quasi-CW 1 GeV

  Quasi-continuous production of fast *n*'s, protons and γ's.

- Cold neutron beam has mean velocity of roughly 600 m/s

Two scenarios:

1. Beam on always
   - max. CN flux
   - max. fast backgrounds
2. Pulsed beam – e.g 1 ms on, 1 ms off
   - CN flux x 0.5
   - **No** fast backgrounds

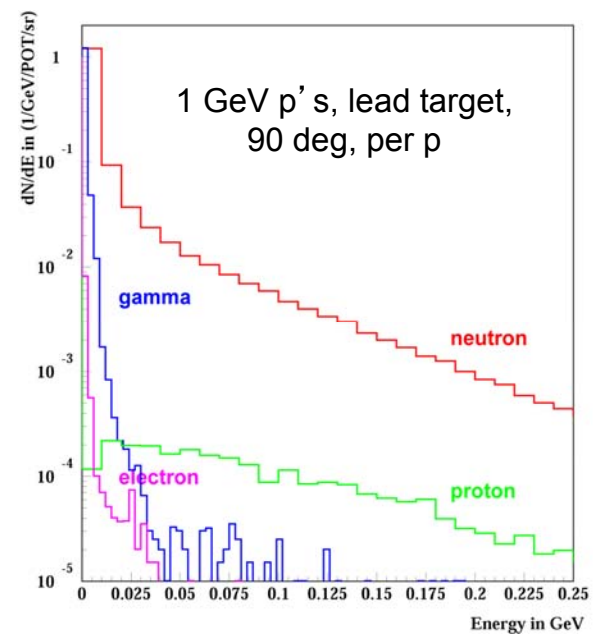

S. Striganov (FNAL)

NNBarX Layout

Default geometry will suppress fast backgrounds using passive shielding wherever possible

Tracker detector selection favors gas counters (with minimal hydrocarbons) to suppress sensitivity to fast n's

evaluate detector response to fast n's!

Experiment design and simulation requires integrated treatment of CN source, beamline and detector to model backgrounds

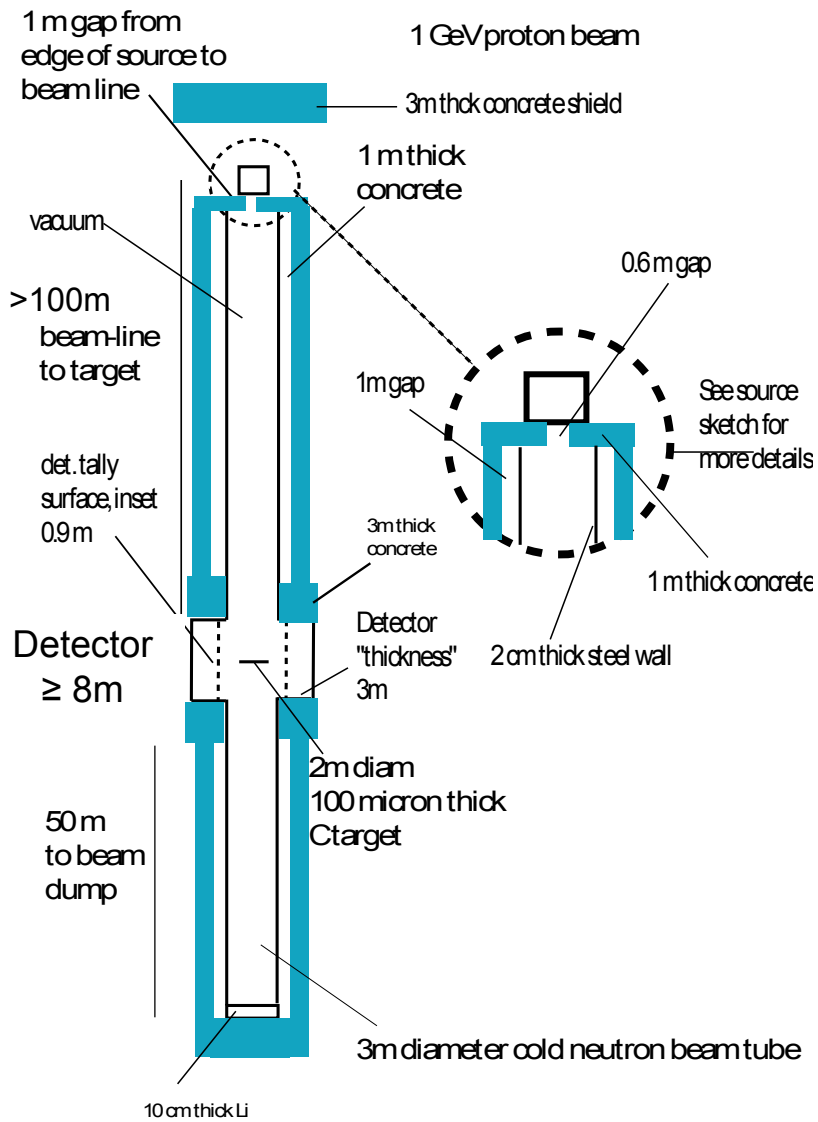

Sample layout for n background modeling

NNBarX Detector Specifications

Our starting point: ILL detector

Annihiliation target

Vacuum region and inner lining

TOF system

Current R&D focus

Tracker

Calorimeter

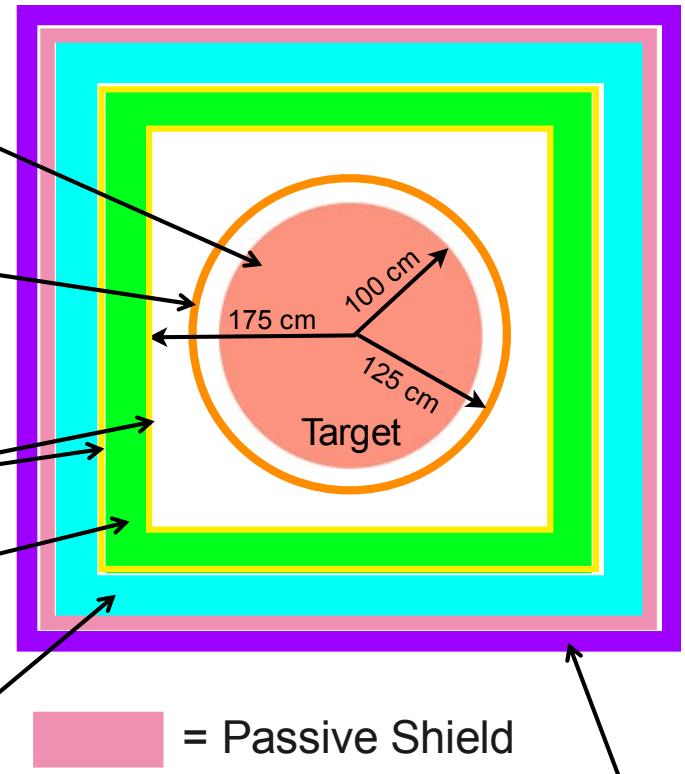

Cosmic-ray Veto

NNBarX Detector: Specifications and candidate technologies

Annihilation Target: 100 μm thick ^{12}C disk
control ^{1}H to < 0.1% (reduce gen. of capture γ's)
diameter probably > 2 m

Vacuum Region: mag. shielded low *Z* wall
(for low (n,γ) x-section & reduces mult-scattering)

Inner Lining: need to reduce gen. of γ's by captured *n*'s (^{6}LiF or similar)

Tracker: annih. vtx. Reconst. *rms* ≤ 1 cm
Solid angle coverage of min. ~20° – 160°

Possibilities: straw tubes, range stack of polystyrene scintillating bars, MWPCs, TPC

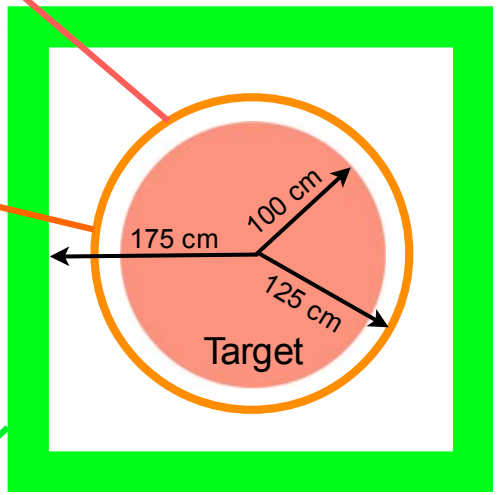

NNBarX Detector: Specifications and candidate technologies

TOF System: 2 layers of fast detectors
Before and after Tracker
Discriminate CR's from annih.-like tracks

Calorimeter: stop all annih. products here
Solid angle coverage of min. ~20° – 160°

MINERvA-like wavelength shifting fibers
w/ scintillating bars (+SiPM/PMT) interspersed
between Fe and Pb plates [16]

Passive Shield: veto neutral CR's
prevent autoveto of *nbar*-annih. events

Cosmic-Ray Veto: identify all CR bkgd
MINOS-like scintillator supermodules [17]
(8m L x 15m W, 95–97% efficiency)

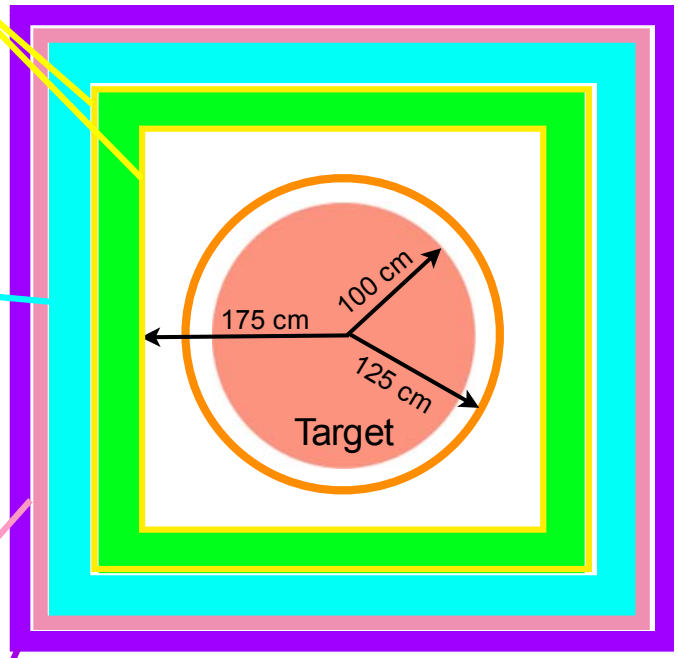

= Passive Shield

R&D Program:

Ongoing:

Annihilation event generator

CSUDH

Parametric simulation studies of sensitivity to annihilation events and fast neutrons

NCSU, UTK, LANL, Fermilab

Specific detector technologies:

- scintillating bars coupled to PMTs or SiPMs -- Fermilab, NCSU
- straw tubes (Atlas TRTs) for tracker -- IU
- proportional gas tubes for tracker -- LANL
- TPC tracker -- Bannerjee group, Saha Institute, India

Direct measurement of efficiency and response of detectors to fast neutrons at WNR

LANL, NCSU

NNBarX Scintillator Candidates

MINERVA Extruded Scintillator
(Affordable & Produced at FNAL)

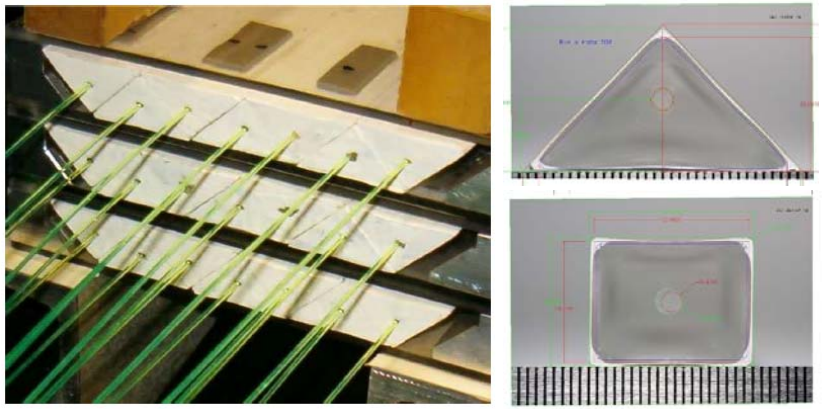

MINERvA images credit: E. Ramberg (FNAL)

PMT or SiPM

Content of Tertiary Beam from TOF System –
MINERVA T977 Test Beam Experiment Data

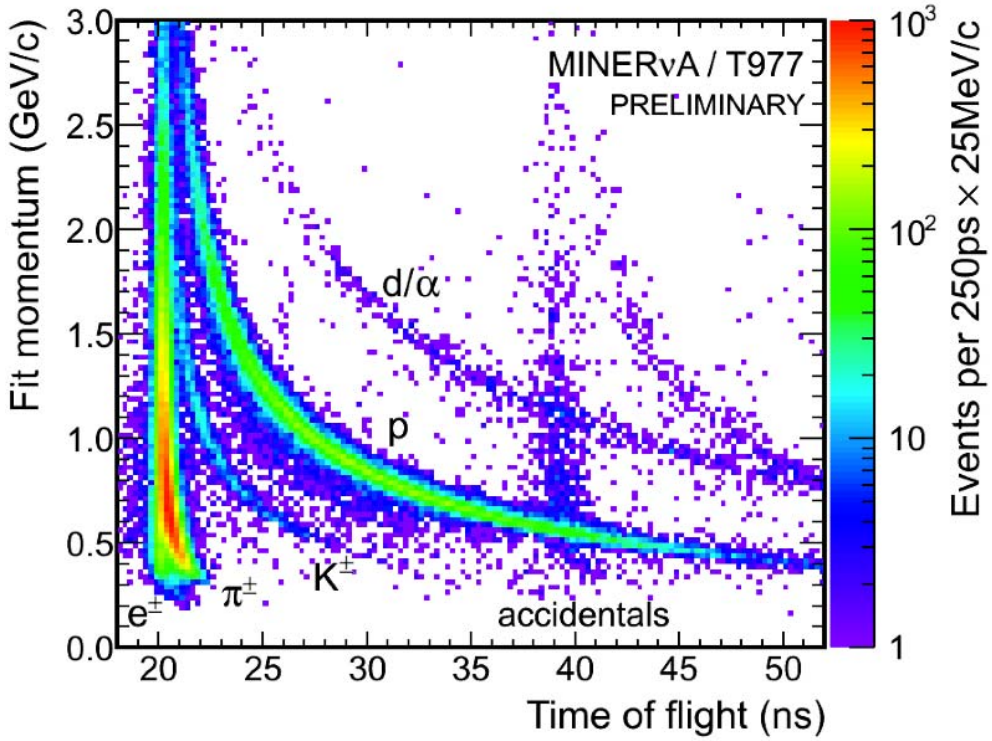

Need to consider add'l alternatives.

NNBarX Tracker Candidates

- Straw tube array in barrel and end-cap configuration (ala ATLAS).

- ATLAS TRT – hit precision: ~130 μm, ε ~ 94%, [18].

- Straw tube fill gas options need to be identified and tested.

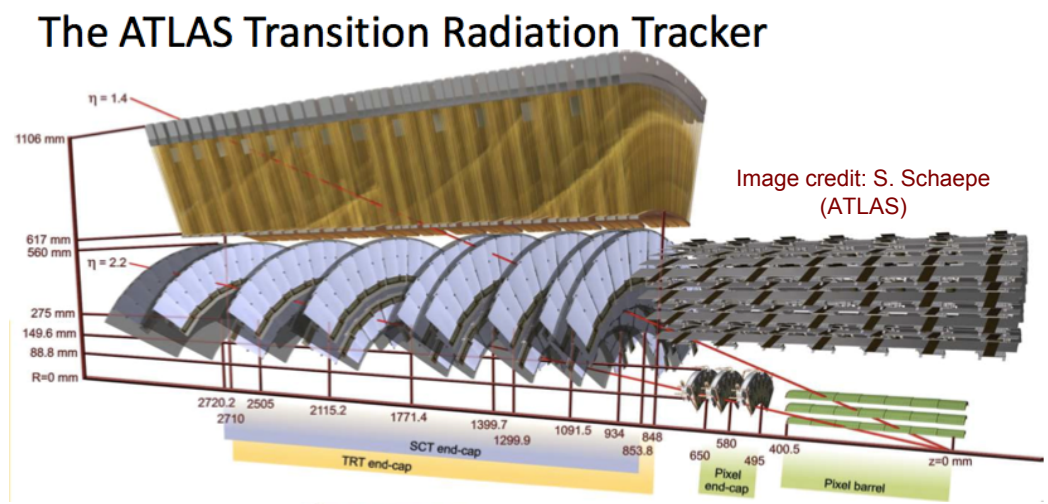

Image credit: S. Schaepe (ATLAS)

Straw Tube Schematic



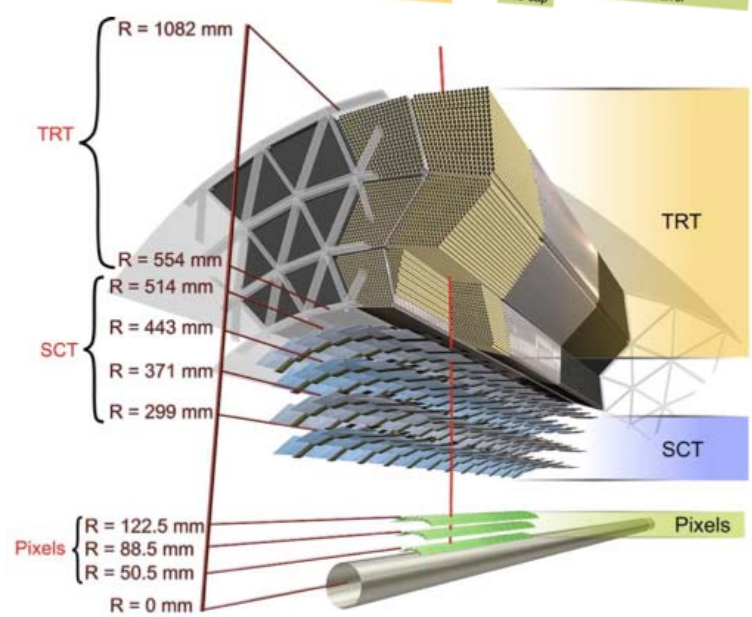

TRT Assembly at Indiana University

Other Options

- MWPCs
- TPC(s)
- liquid scintillator

R&D Program: WNR Tests

Goal: evaluate response of specific gas and plastic scintillators to fast neutrons (few MeV < E_n < 800 MeV)

Technique: use known absolute n spectrum for pulsed beam at LANSCE WNR facility to measure efficiency (and timing) vs. energy

Detectors: Atlas straw tubes (delayed till fall)
fission foil detector
carbon fiber gas proportional counters
plastic scintillator

WNR Tests - Layout

LANL WNR-15R Beamline

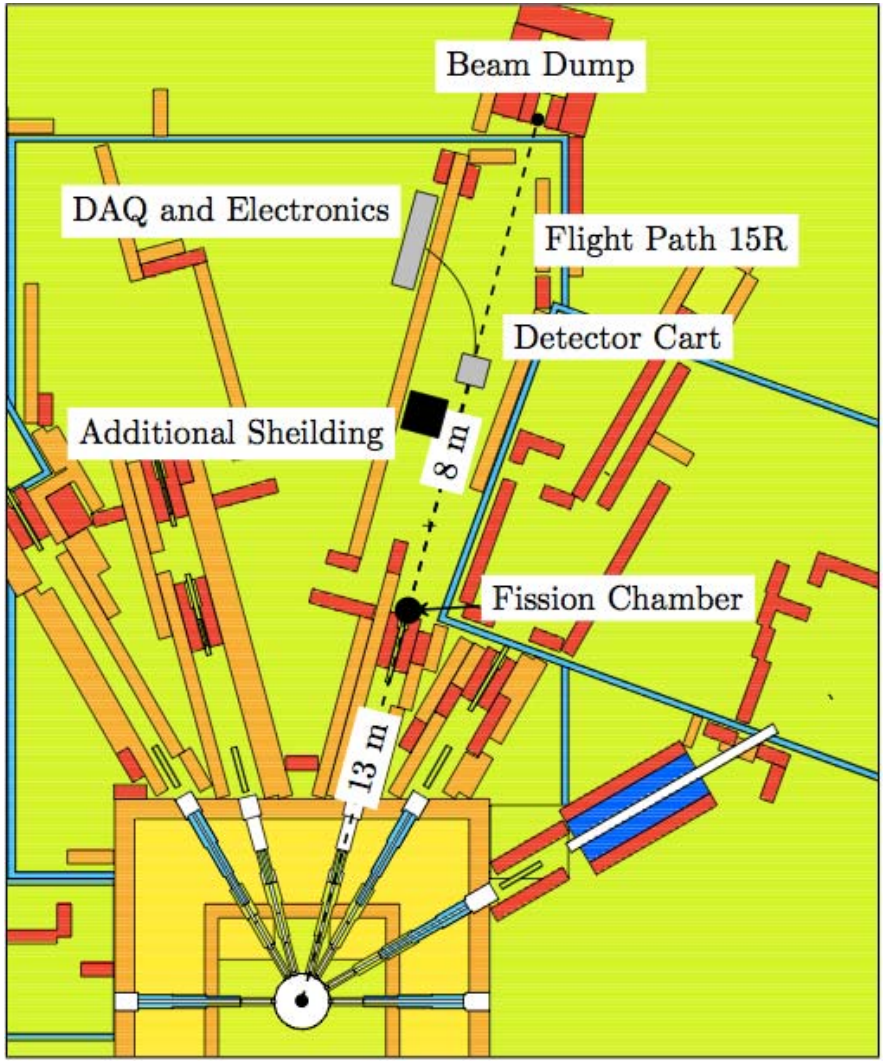

Predicted *n*-flux 20m from target

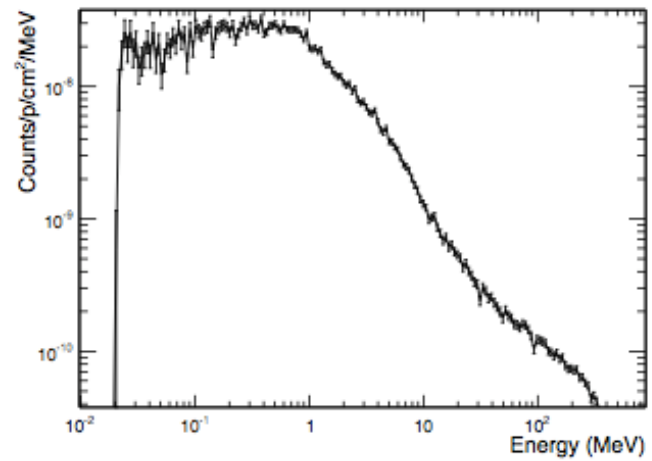

Interested in these energies, very similar to those we will encounter at Project X

WNR Tests - Fission Foil

Fission Chamber TOF Spectra

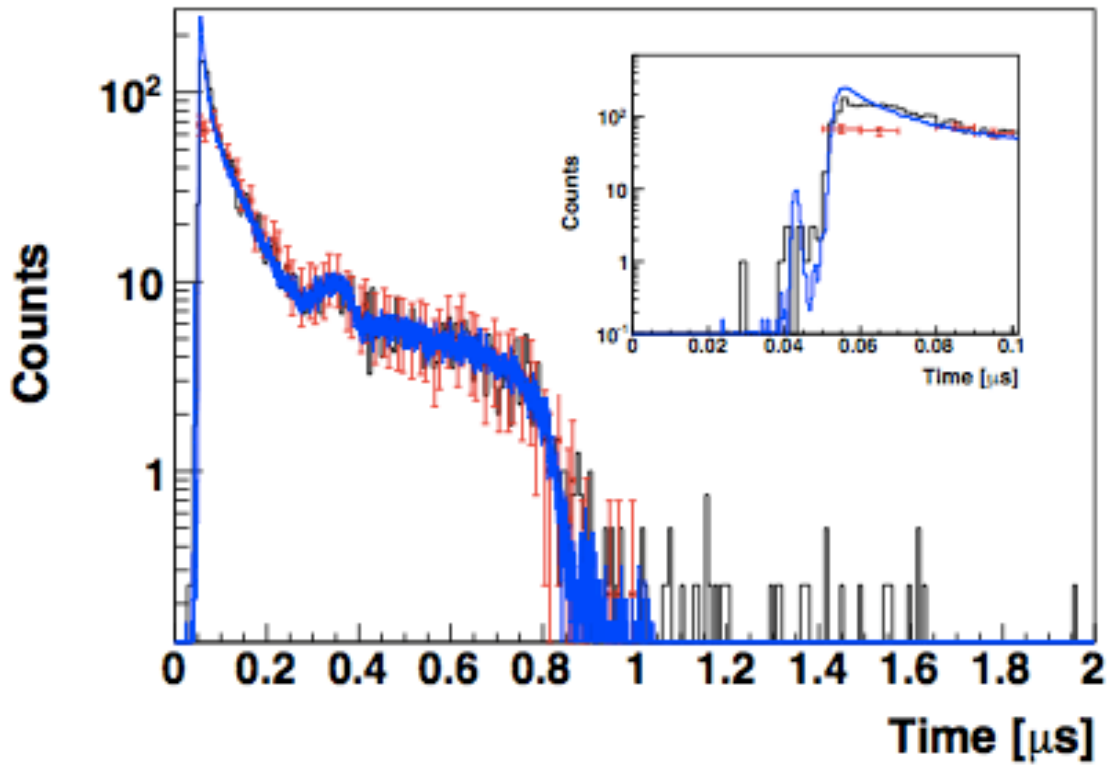

Absolute spectrum derived from fission foil detector mainted by LANL

First results – Fission foil energy spectrum

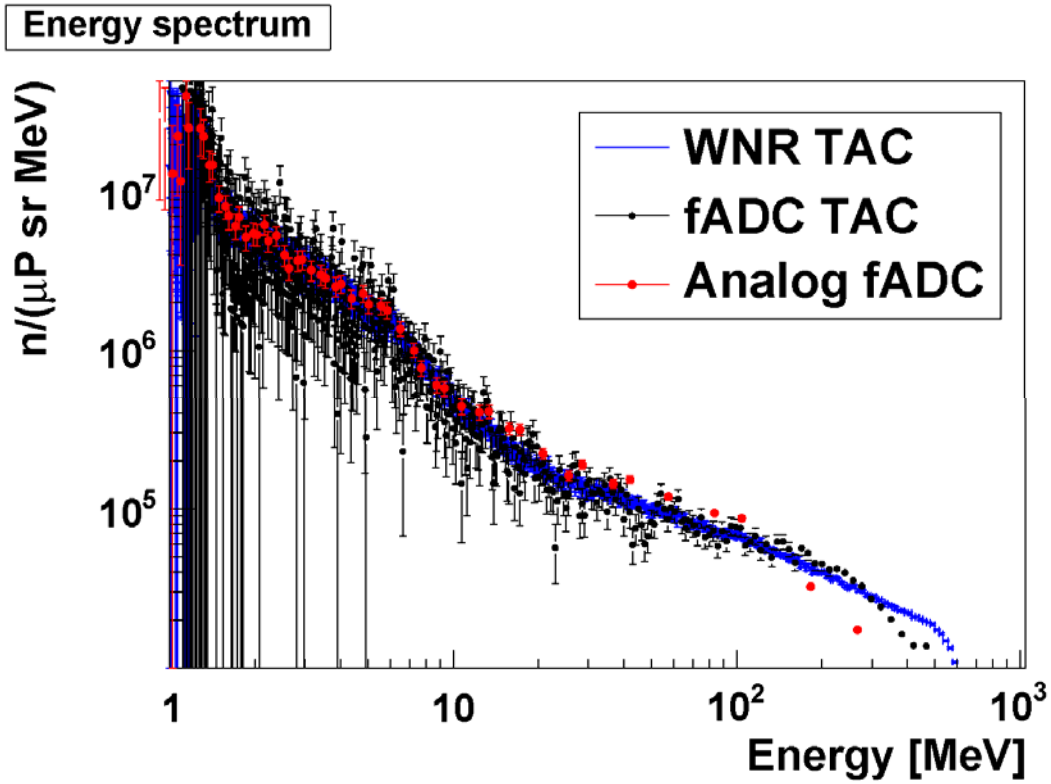

250 MHz 8-chnl 12-bit fADC

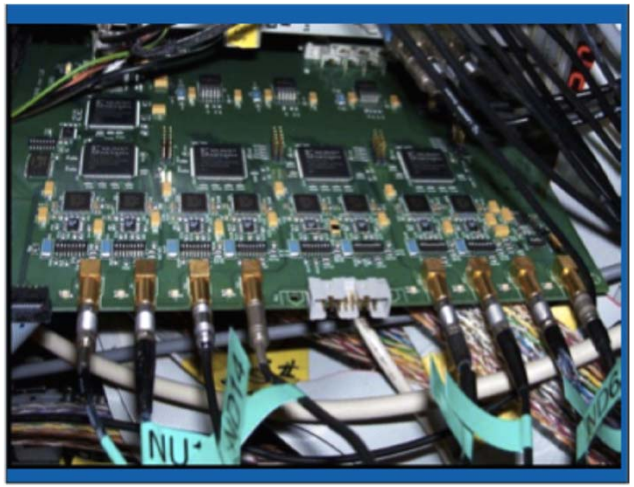

LANL proporotional gas tubes

Schematic View

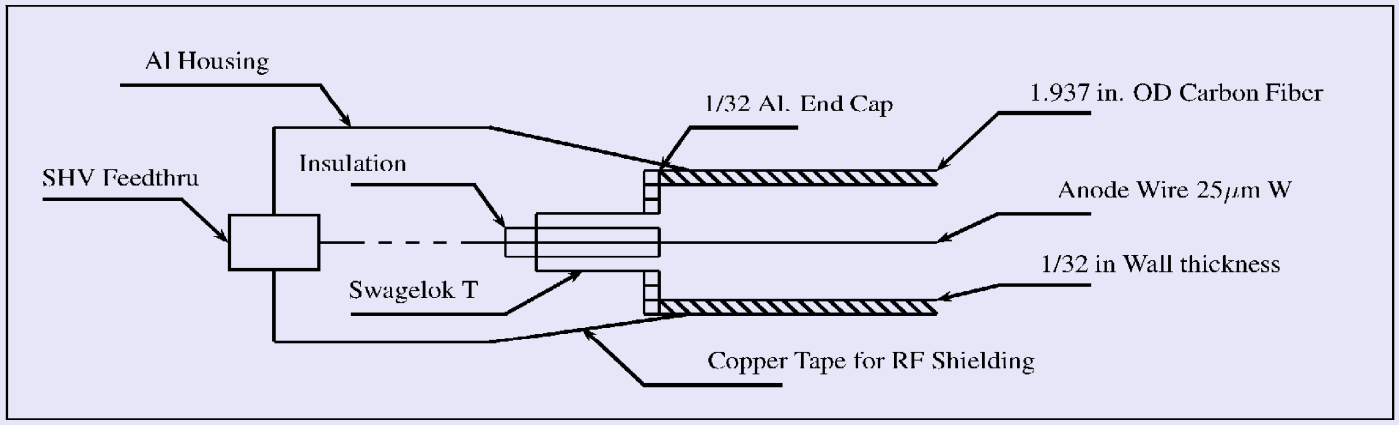

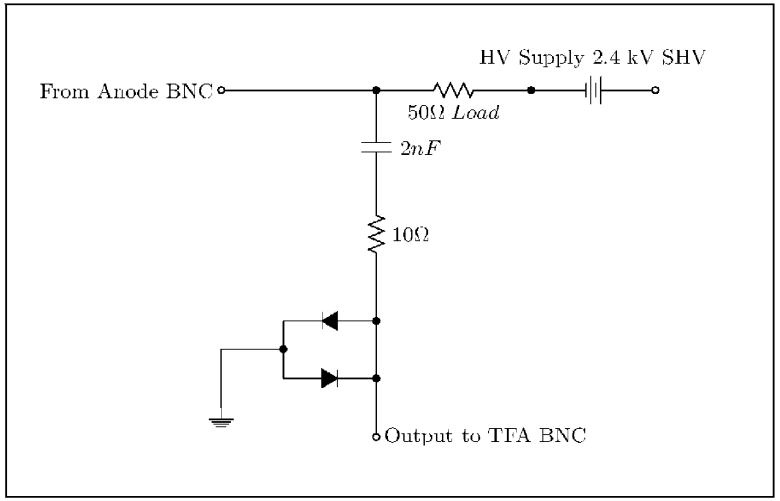

Gas Mixtures

- 1 bar Ar/Ethane (50/50 mix)
- 1 bar Ar/Ethane/CF_4 (50/6/44 mix)

WNR Tests - Gas Tubes & Prep

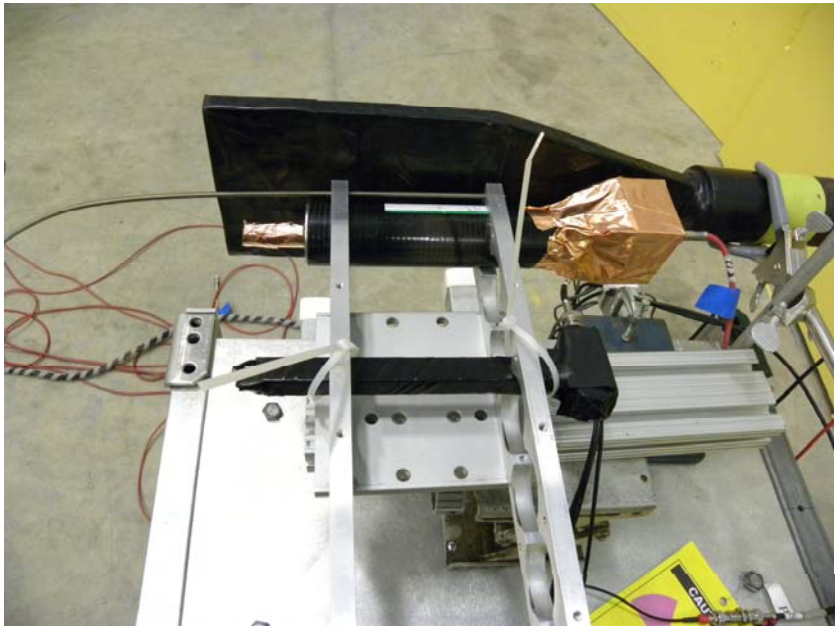

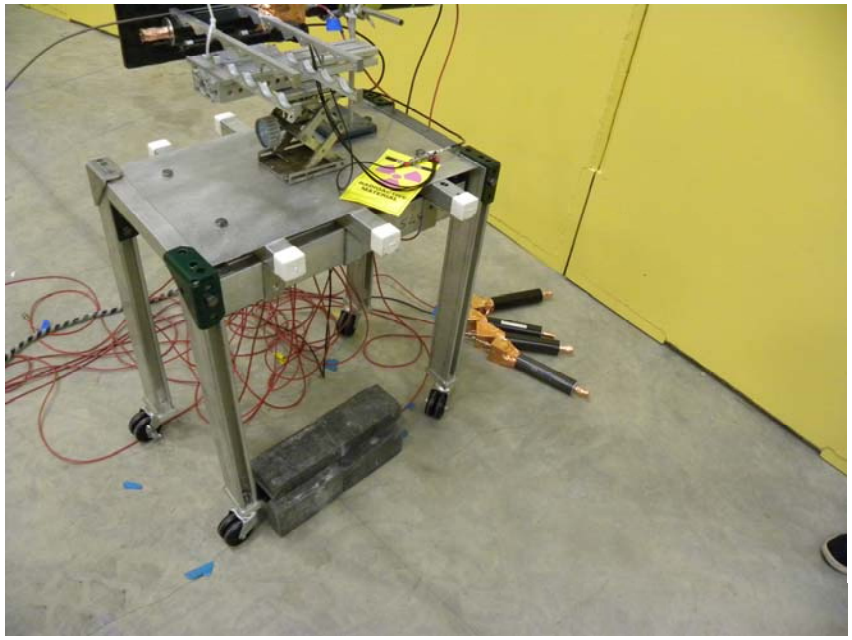

Results and Plans

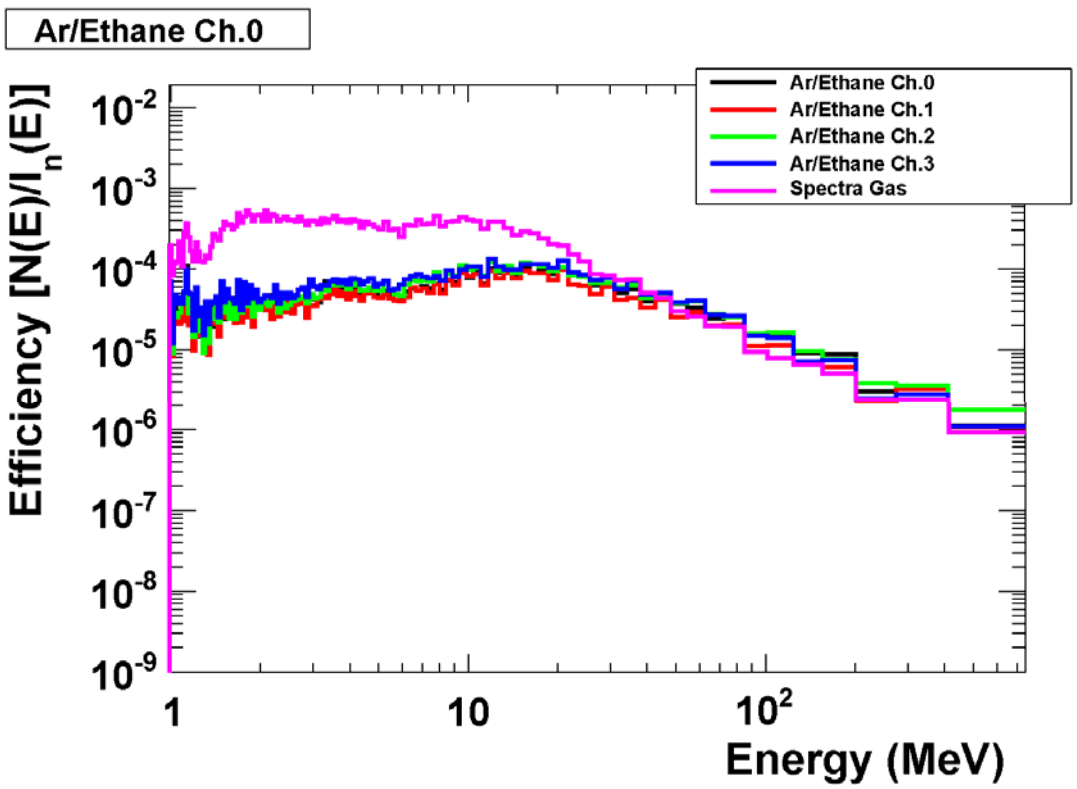

$\varepsilon < 10^{-5}$ for E > 100 MeV

Complete: LANL proportional tube efficiency measurement

Nov. 2013: straw tube measurements

R&D outstanding needs

- **Assessment of alternative detector technologies**
  Currently available straw tubes (ATLAS TRT tubes not available), liquid scintillator, etc…
  → Mu2e tubes?
- **Trigger development**
- **Timing optimization**
- **Readout optimization and cost minimization**
  Keeping costs down may be a driving factor in design
- **Neutron shielding and beam dump**
- **Cold neutron beam monitoring**
- **Mechanical design, etc…**

Path Forward

Short term:
Complete WNR measurements of straw tubes
Create baseline detector model

- Preliminary evaluation of efficiency for annhilation vertex and backgrounds
- Cost model

Longer term:
Systematically evaluate detector technologies
Optimize background strategy

Welcome input and collaborators!

Summary

- ILL experiment provides excellent proof-of-principle for a zero background experiment

- Optimizing the physics reach of the NNbarX experiment will require careful assessment of background rejection requirements for the Project X geometry

- Modern detector technologies provide cost-effective and exciting options to explore!

Collaboration

Experimentalist Group

K. Ganezer, B. Hartfiel, J. Hill
California State University, Dominguez Hills
S. Brice, N. Mokhov, E. Ramberg, A. Soha, S. Striganov, R. Tschirhart
Fermi National Accelerator Laboratory
D. Baxter, C-Y. Liu, C. Johnson, M. Snow, Z. Tang, R. Van Kooten
Indiana University, Bloomington
A. Roy
Inter University Accelerator Centre, New Delhi, India
W. Korsch
University of Kentucky, Lexington
M. Mocko, P. McGaughey, G. Muhrer, A. Saunders, S. Sjue, Z. Wang
Los Alamos National Laboratory
H. Shimizu
Nagoya University, Japan
P. Mumm
National Institute of Standards
E. Dees, A. Hawari, R. W. Pattie Jr., D. G. Phillips II, B. Wehring, A. R. Young
North Carolina State University, Raleigh
T. W. Burgess, J. A. Crabtree, V. B. Graves, P. Ferguson, F. Gallmeier
Oak Ridge National Laboratory, Spallation Neutron Source
S. Banerjee, S. Bhattacharya, S. Chattopadhyay
Saha Institute of Nuclear Physics, Kolkata, India
D. Lousteau
Scientific Investigation and Development, Knoxville, TN
A. Serebrov
St. Petersburg Nuclear Physics Institute, Russia
M. Bergevin
University of California, Davis
L. Castellanos, C. Coppola, T. Gabriel, G. Greene, T. Handler, L. Heilbronn, Y. Kamyshkov, A. Ruggles, S. Spanier, L. Townsend, U. Al-Binni
University of Tennessee, Knoxville
P. Das, A. Ray, A.K. Sikdar
Variable Energy Cyclotron Centre, Kolkata, India

Theory Support Group

K. Babu
Oklahoma State University, Stillwater
Z. Berezhiani
INFN, Gran Sasso National Laboratory and L'Aquila University, Italy
Mu-Chun Chen
University of California, Irvine
R. Cowsik
Washington University, St. Louis
A. Dolgov
University of Ferrara and INFN, Ferrara, Italy
G. Dvali
New York University, New York
A. Gal
Hebrew University, Jerusalem, Israel
B. Kerbikov
Institute for Theoretical and Experimental Physics, Moscow, Russia
B. Kopeliovich
Universidad Técnica Federico Santa María, Chile
V. Kopeliovich
Institute for Nuclear Research, Troitsk, Russia
R. Mohapatra
University of Maryland, College Park
L. Okun
Institute for Theoretical and Experimental Physics, Moscow, Russia
C. Quigg
Fermi National Accelerator Laboratory
U. Sarkar
Physical Research Laboratory, Ahmedabad, India
R. Shrock
SUNY, Stony Brook
A. Vainshtein
University of Minnesota, Minneapolis

References

[1] M. Baldo-Ceolin *et al.*, Z. Phys. C **63**, 409 - 416 (1994).

[2] G. Bressi *et al.*, Z. Phys. C **43**, 175 (1989); G. Bressi *et al.*, Nuovo Cimento A **103**, 731 (1990).

[3] F. Eisert *et al.*, Nucl. Inst. Meth. A **313**, 477 (1992).

[4] A. Cavestro *et al.*, Nucl. Inst. Meth. A **305**, 488 (1991).

[5] M. Baldo-Ceolin *et al.*, Nuovo Cimento A **105**, 1679 (1992).

[6] E. Iarocci, Nucl. Inst. Meth. A **217**, 30 (1983).

[7] K. Lau *et al.*, Nucl. Inst. Meth. A **320**, 243 (1992).

[8] D. Bortoletto *et al.*, Nucl. Inst. Meth. A **320**, 114 (1992).

[9] G.T.J. Arnison *et al.*, Nucl. Inst. Meth. A **294**, 431 (1990).

[10] R.J. Akers *et al.*, Nucl. Inst. Meth. A **357**, 253 (1995).

[11] G. Abbiendi *et al.*, Nucl. Inst. Meth. A **333**, 342 (1993).

[12] C. Brown *et al.*, Nucl. Inst. Meth. A **279**, 331 (1989).

[13] Y.M. Antipov *et al.*, Nucl. Inst. Meth. A **297**, 121 (1990).

[14] S. Abachi *et al.*, Nucl. Inst. Meth. A **338**, 185 (1994).

[15] W. Menges, arXiv:physics/0609039**[physics.ins-det]** (2006).

[16] K.S. McFarland for the MINERvA Collaboration, Nucl. Phys. B (Proc. Suppl.) **159**, 107 (2006).

[17] D.G. Michael *et al.*, Nucl. Inst. Meth. A **596**, 190 (2008).

[18] S. Schaepe, ANIMMA, DOI: 10.1109/ANIMMA.2011.6172828
J. M. Stahlman, http://cds.cern.ch/record/1381599/files/ATL-INDET-PROC-2011-005.pdf
A. S. Boldyrev et al., Instruments and Experimental Techniques 55, 323 – 334 (2012).
A. Vogel, 13th Vienna Conference on Instrumentation, http://cds.cern.ch/record/1537991?ln=en