

Coupling Coil Testing

Ruben Carcagno

Fermilab

June 17, 2013



- Background and Introduction
- Test Facility Design And Fabrication
- Test Facility Commissioning/Test Results
- Next Steps
- Schedule

- In the Fall of 2011, the MICE Collaboration asked Fermilab for urgent help to provide a cold test facility for the Coupling Coils.
- A plan was developed and approved by Fermilab's directorate on January 17, 2012. Main elements of the plan:
 - Use a SMES cryostat from the National High Magnetic Field Lab found by LBNL
 - Fabricate and Install a new “Solenoid Test Facility” at Fermilab's Central Helium Liquefier (CHL), with first use for MICE coupling coil solenoid testing
 - Example of a future possible use of this facility is for mu2e Transport Solenoids (with test stand upgrades)
- A Fermilab initial review of the test facility preparations took place on February 2012. The review committee agreed with the proposed approach. Work on this new facility quickly ramped up.


- Included cooling tubes welding, installation of leads stabilization, passive QP (cold diodes), instrumentation, etc.




Cooling
Tubes
Connections

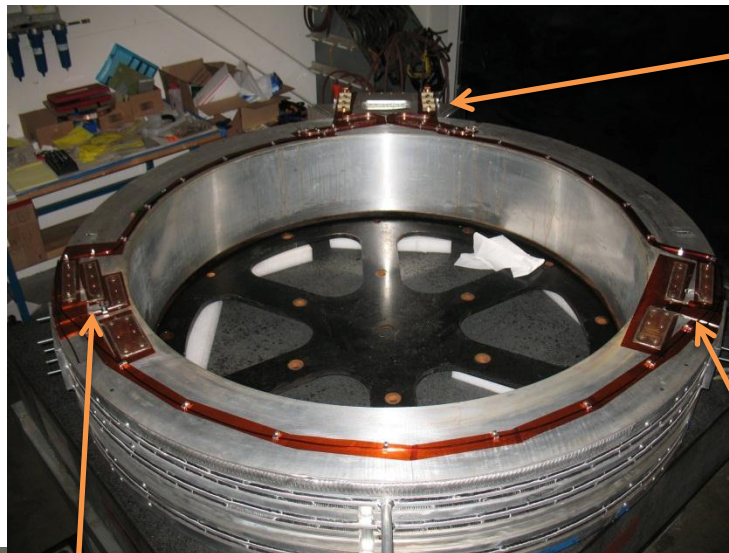

SC Leads
Stabilization

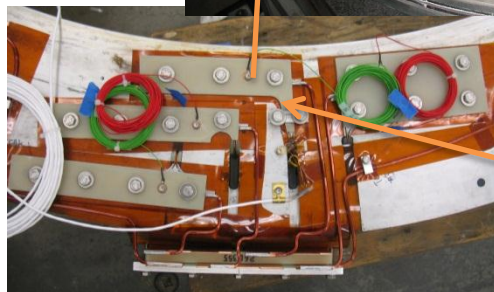

Cold QP Diodes
Leads
Stabilization

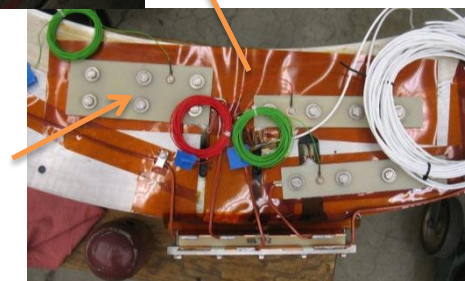

- Cooling Tube Vacuum Leak found during checkout
- Solution: a bypass pipe branch



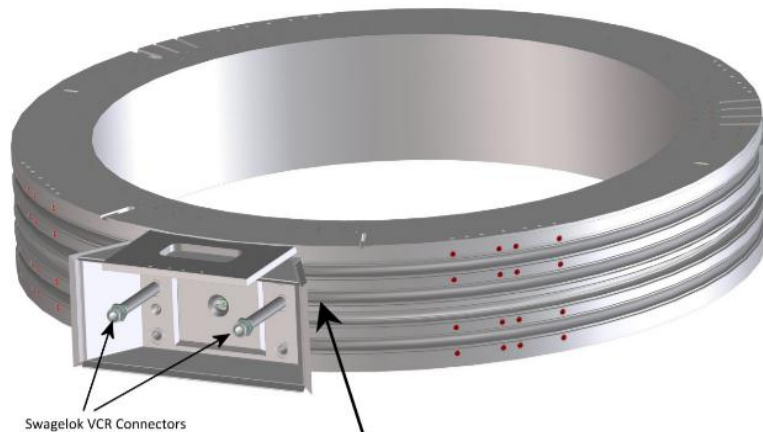



Figure 1 CAD model image of magnet showing approximate location of vacuum leak.

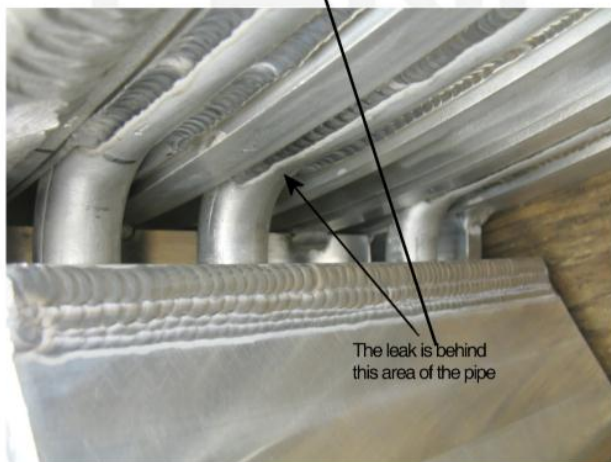


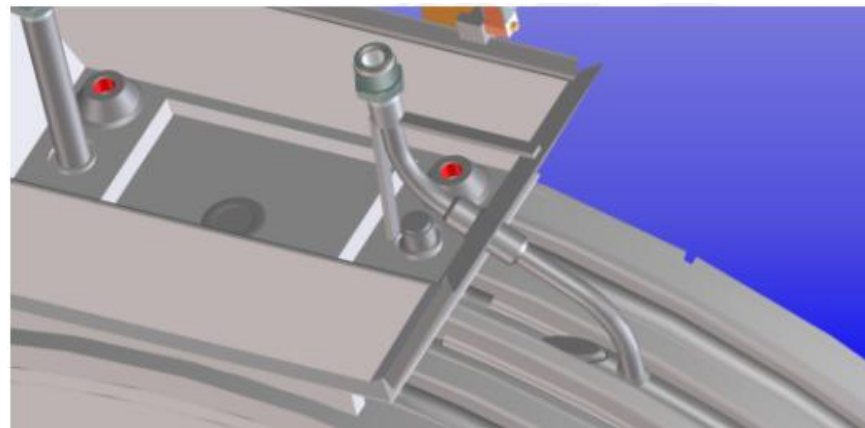

- First Coupling Coil arrived at Fermilab on 1/31/13
- Coil passed hipot, leak check, and instrumentation check


- The Test Cryostat was brought to Fermilab from the NHMFL in Florida and installed in the CHL building, South Annex
- Unnecessary internals were removed, and both the vacuum vessel and the top plate were leak checked and passed

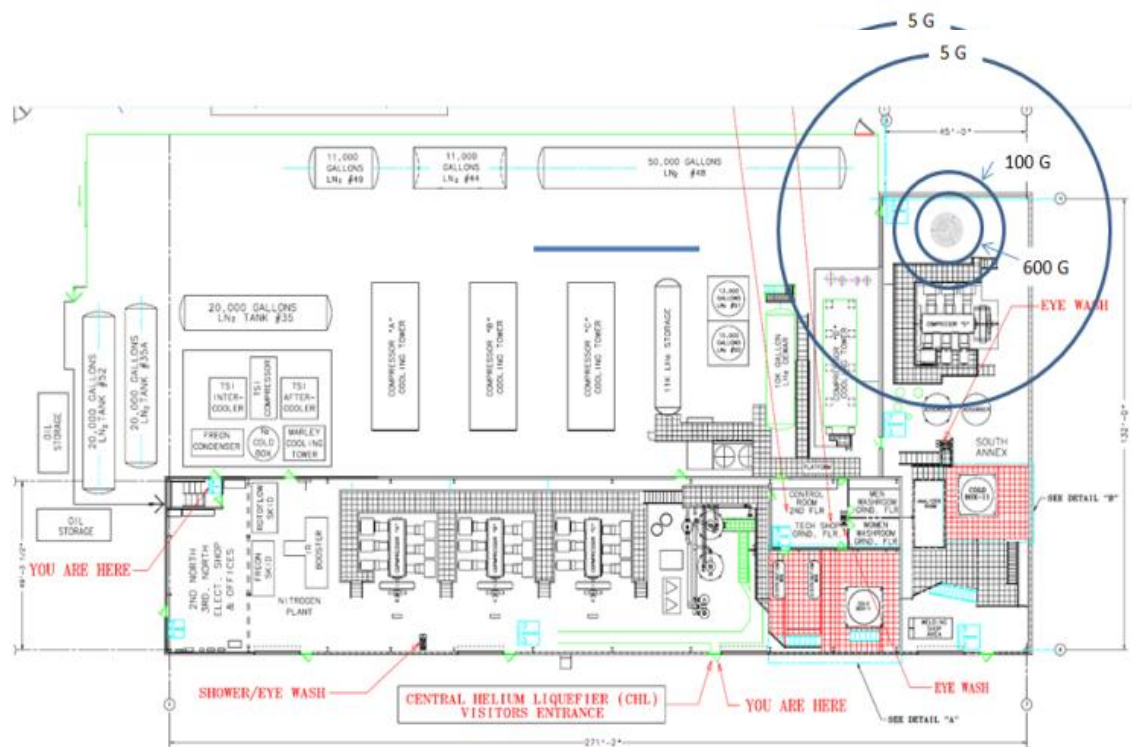

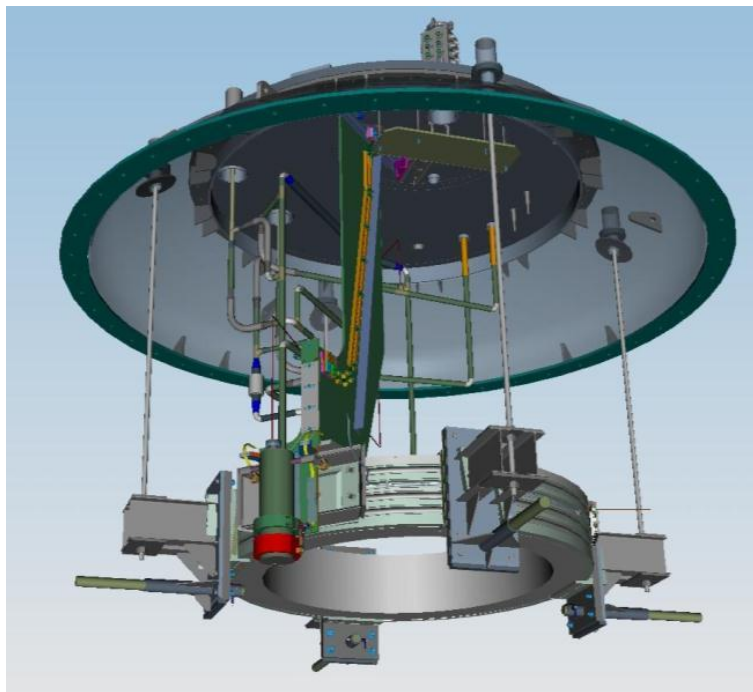

- New Dished Head
- Mechanical Supports
- Cryo Piping
- Current Leads
- Valves, Instrumentation
- Pressure Test
- Leak Check
- Hipot





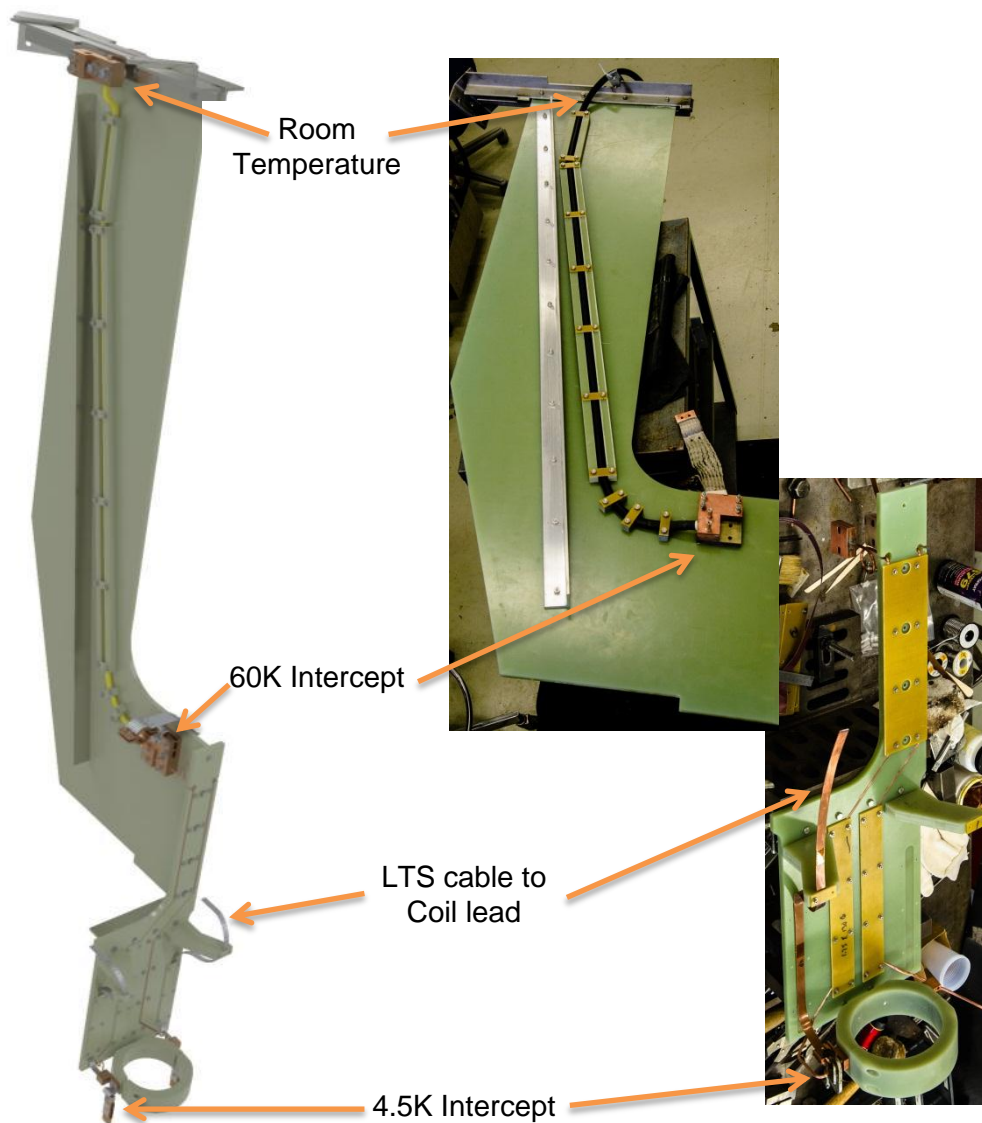

- Conduction-cooled, optimized for 220A
- Two thermal intercepts: 60K (thermal strap to 4.5K GHe return pipe) and 4.5K (Wang NMR intercept to 4.5K boiling He reservoir)
- Low Temperature Superconductor (LTS) section between 4.5K intercept and coil leads
- G-10 mechanical support for magnetic forces

- Valves and Instruments, Instrumentation Tree, U-Tubes Connections, Power Connections, etc.





New Dished Head

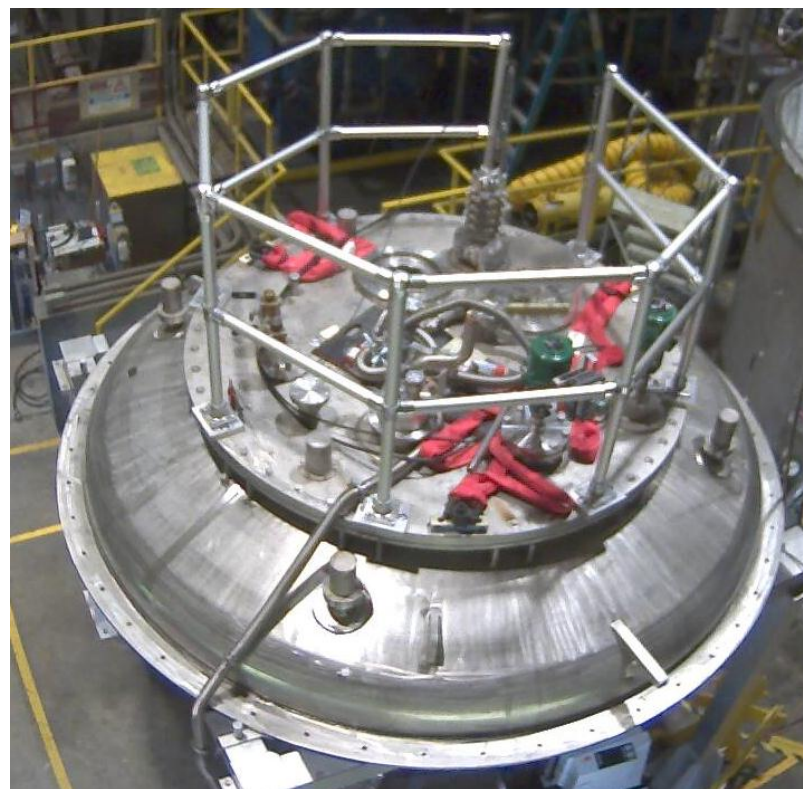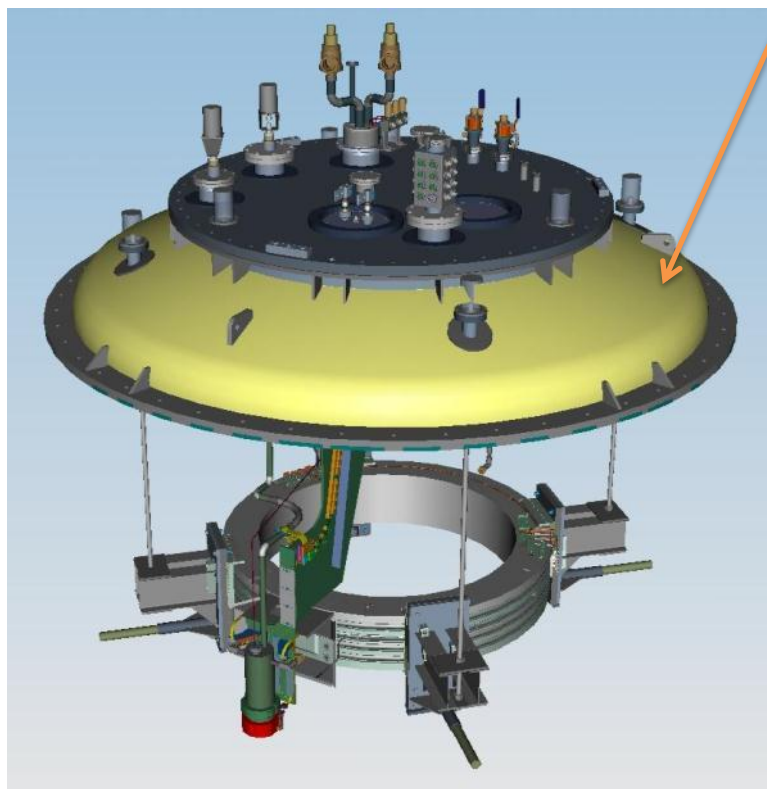

- Designed by Fermilab, fabricated by Meyer Tool




Design takes into account cold mass weight and magnetic forces with building ferromagnetic structures

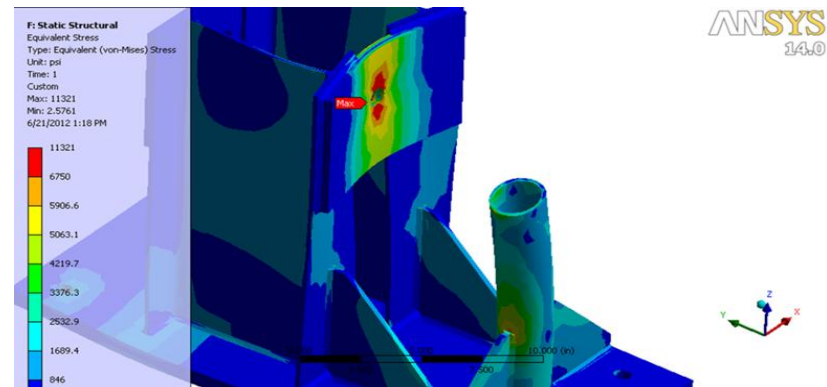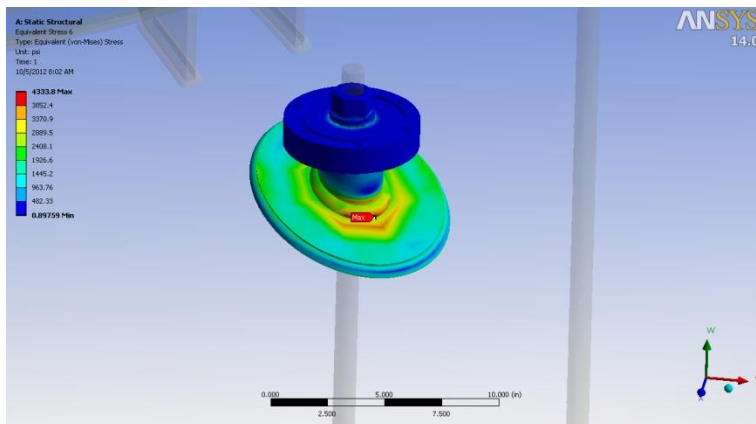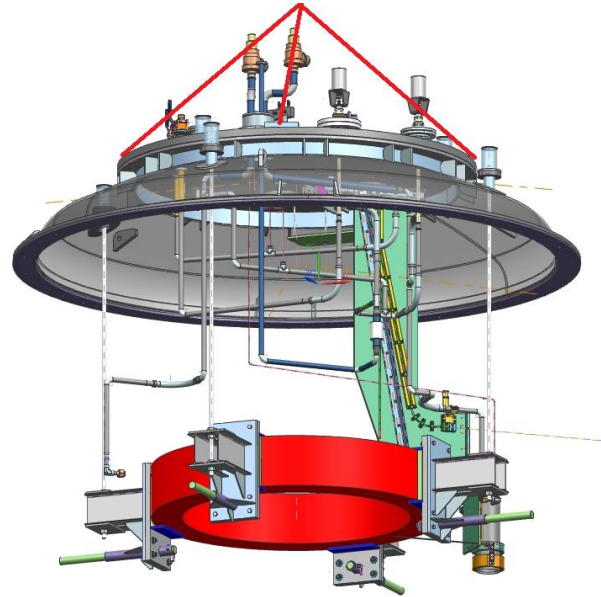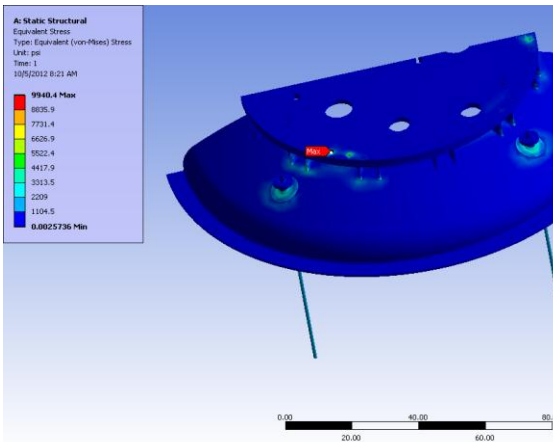

- Liquid Helium and Helium gas recovery provided by the Central Helium Liquefier (unused after the Tevatron shutdown in September 2011)
- Up to 10 g/s of liquid helium at 4.5K supply to the Coupling Coil cooling tube from a nearby CHL 10,000 Gallon liquid helium Dewar
- Helium inlet temperature during cooldown/warmup controlled to maintain a maximum cold mass gradient of 50K
- The return helium warmed up to room temperature before sending back to the CHL facility for recovery
- No venting to atmosphere expected during a quench (small LHe inventory in the cooling tube)

- Liquid Helium (LHe) Transfer Line from 10,000 Gallon LHe dewar to Bayonet Can





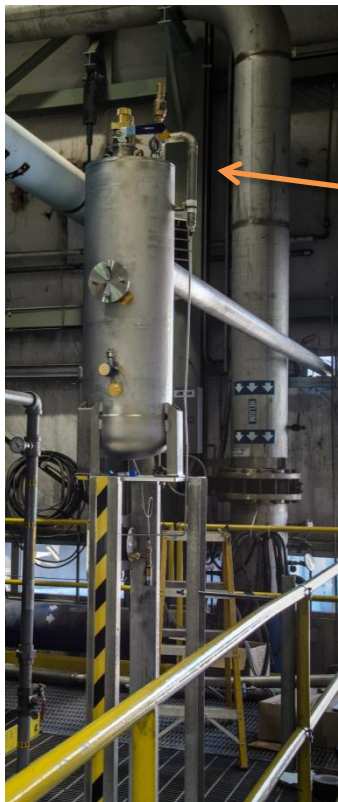


U-Tube to
Bayonet Can



Return Gas to
Warmup
Heater

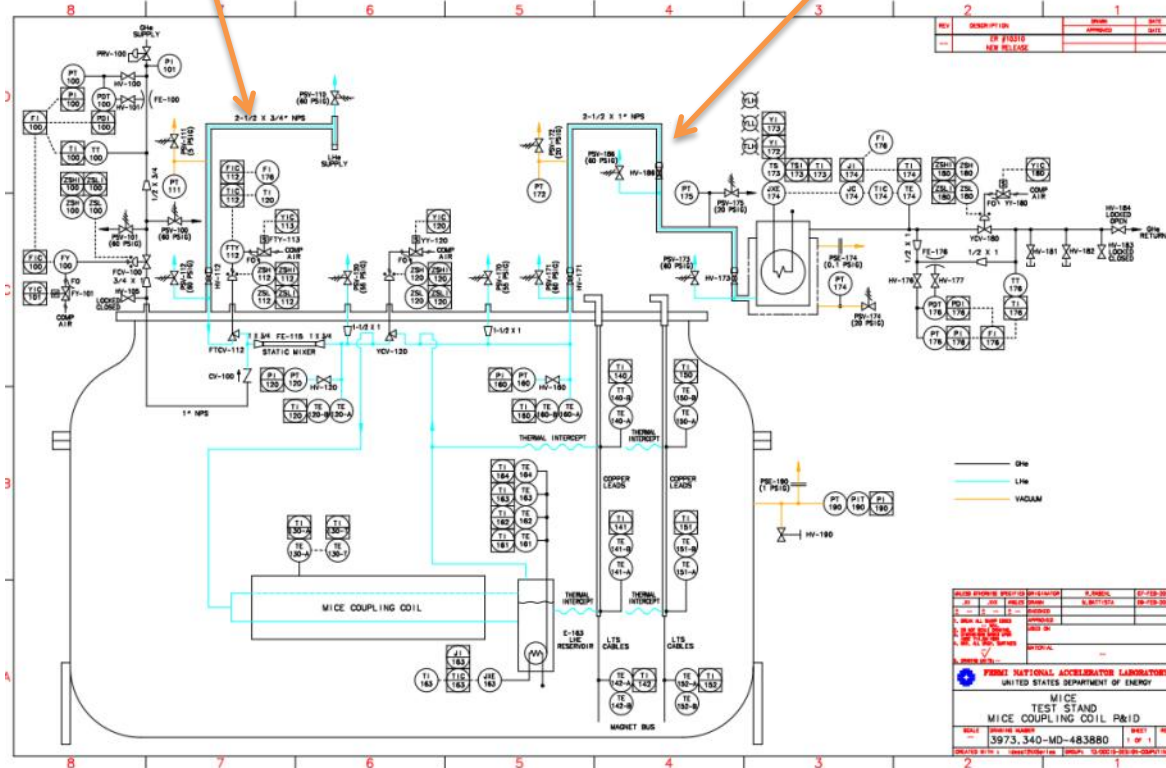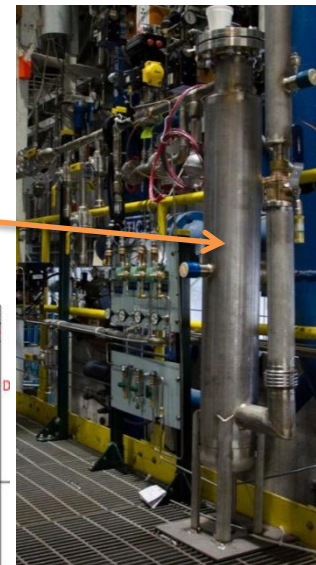


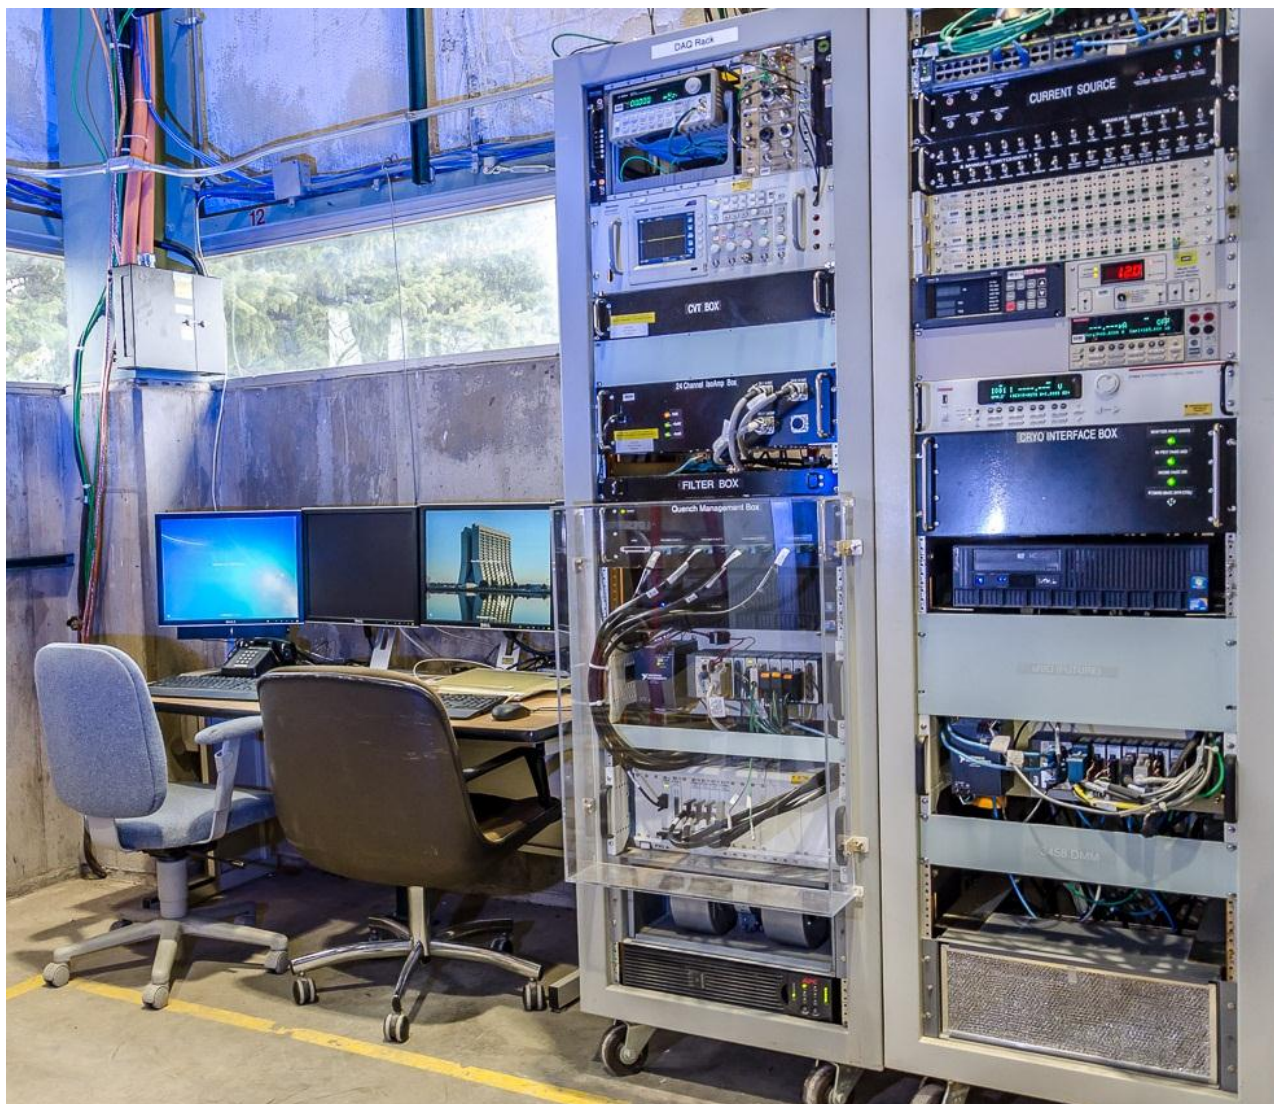

- DAQ and Control System Racks with Local Control Station near Test Cryostat

- Local control station cannot be used under high magnetic field because personnel have to evacuate the area for safety reasons
- Two remote control stations installed: one in the CHL building, and another at the IB1 Magnet Test Facility
- E-log and measurement data available on a web interface


Remote Test Stand control station at IB1 Magnet Test Facility Control Room

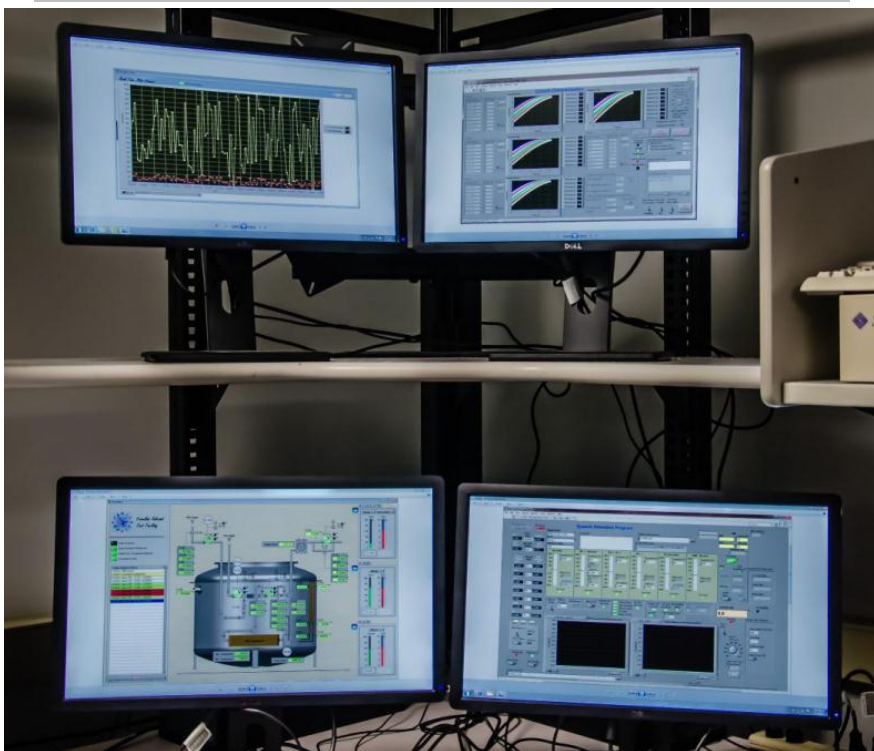


CHL Test Stand Control Room (Climate Controlled, Acoustically Insulated)






Monitoring & Control Subsystem UI

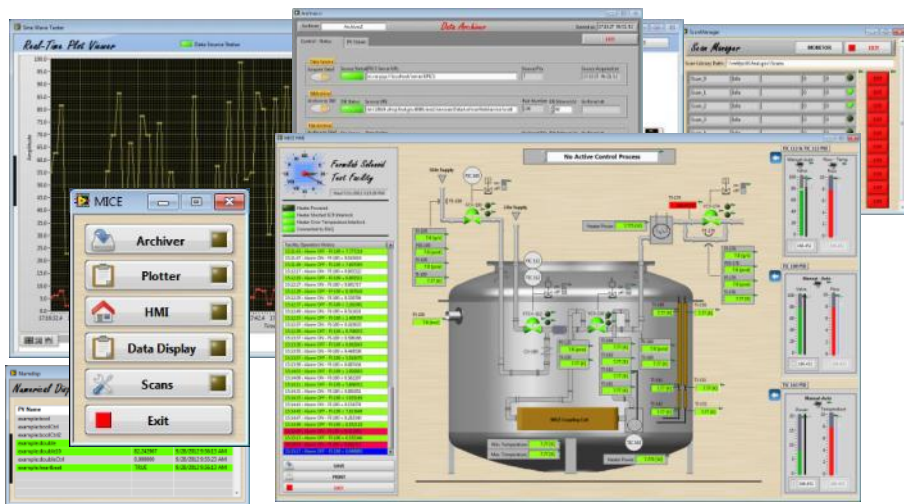


Quench Subsystem UI

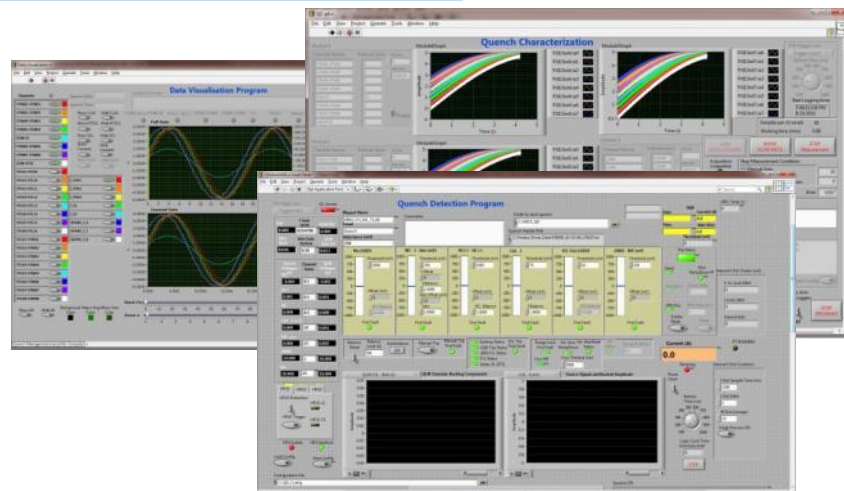

Web-based Data UI

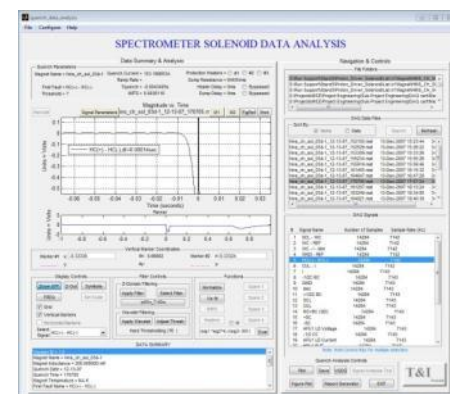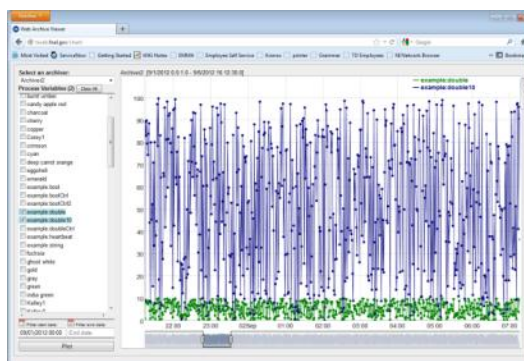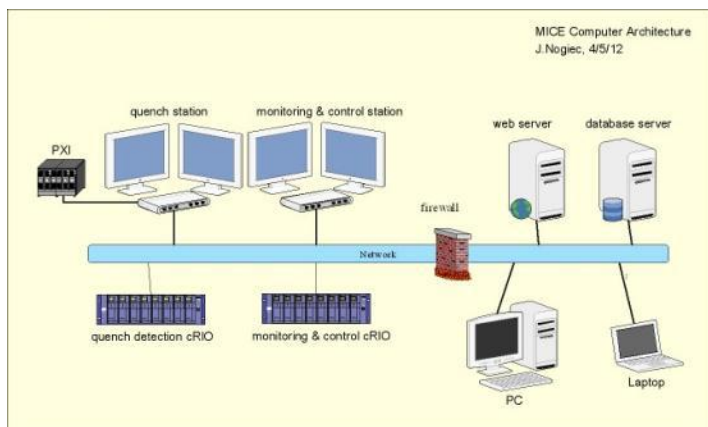


- Similar Fermilab system being used successfully for the MICE Spectrometer Solenoid Test at Wang NMR
- Example: Quench on 6/26/12, $I = 215$ A

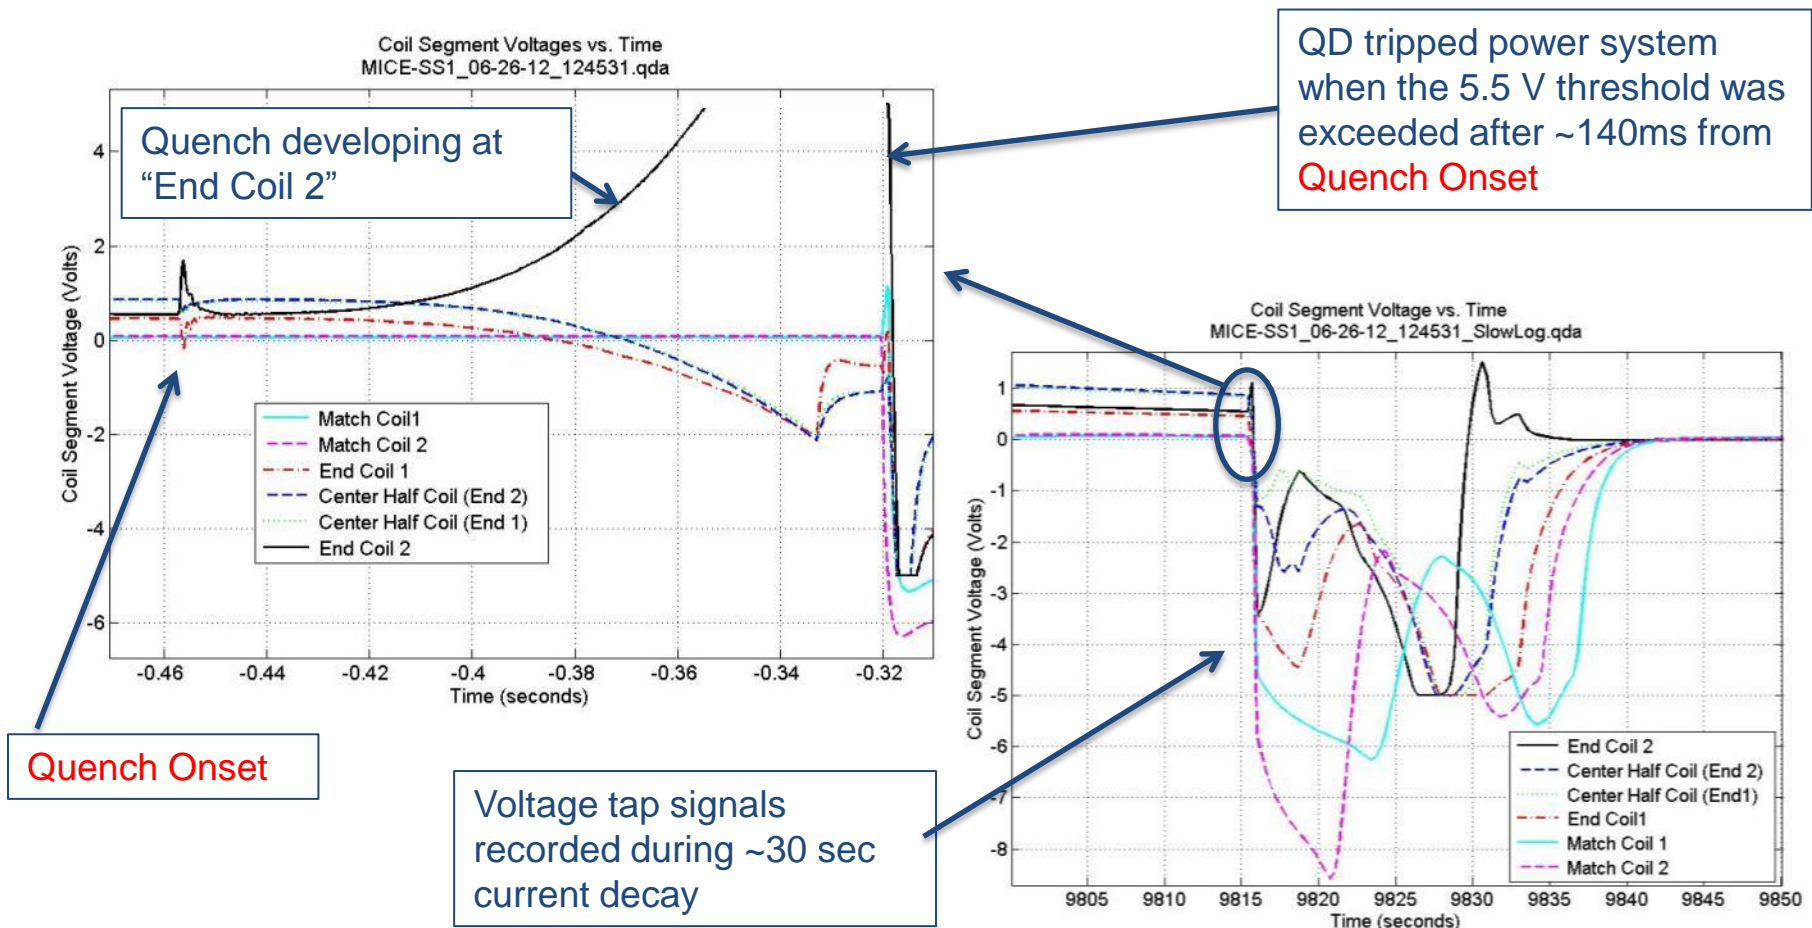


- The Test Facility Power System Rack delivered by LBNL
- Fermilab added personnel Emergency Trip System Box and current readout hardware to the rack



MICE COUPLING COIL POWER SUPPLY SYSTEM

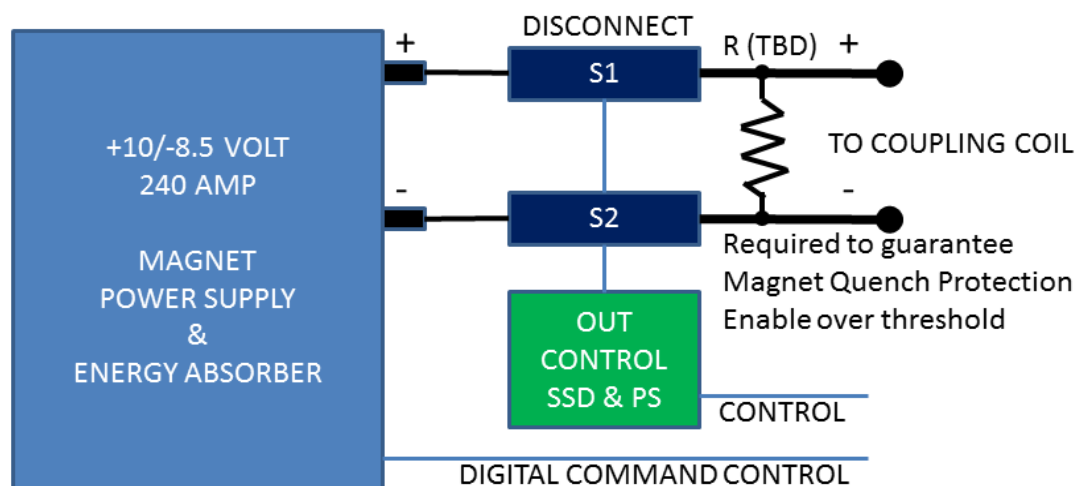


AC power and system grounding details not included

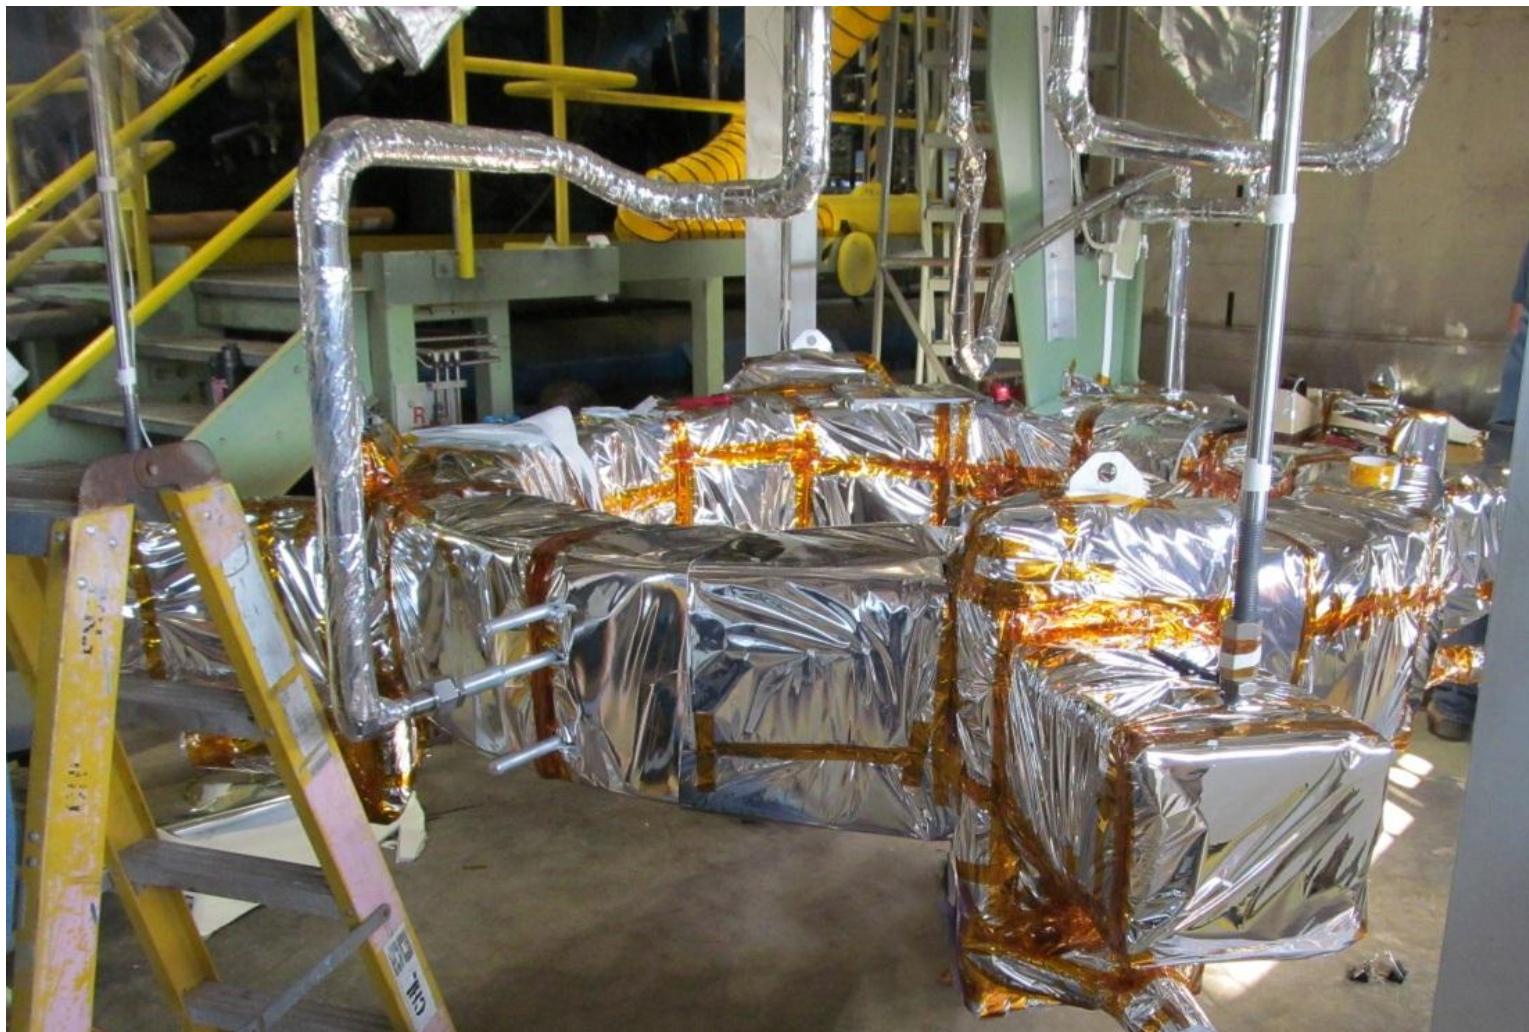


Operational Readiness Clearance (ORC) granted April 17, 2013



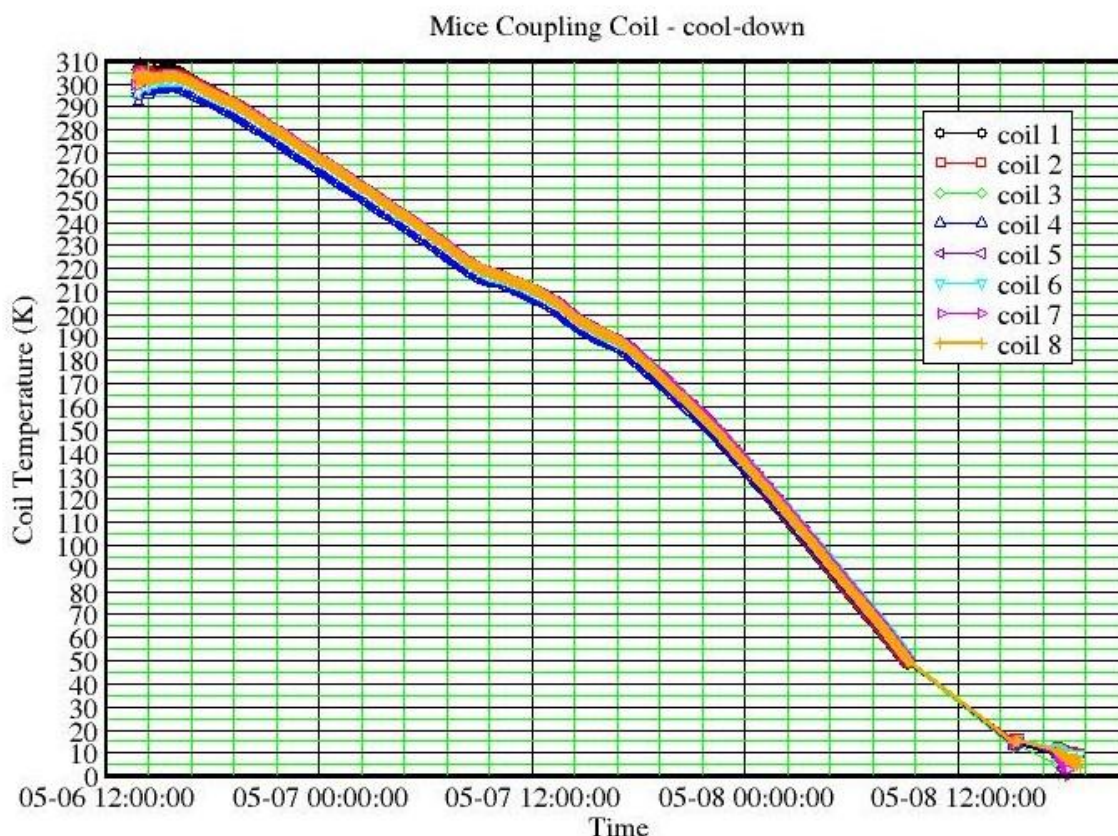


- Started Monday 5/6/13 at noon
- Automatic cooldown with < 50 K Delta T proceeded very well
- Coil < 10 K by Wednesday 5/8/13 afternoon
- Shlomo Caspi from LBNL followed the cool down closely and analyzed strain gauge measurements

- Insulating vacuum quickly degraded when we started sending two-phase helium to the coil cooling tube on Wednesday evening!

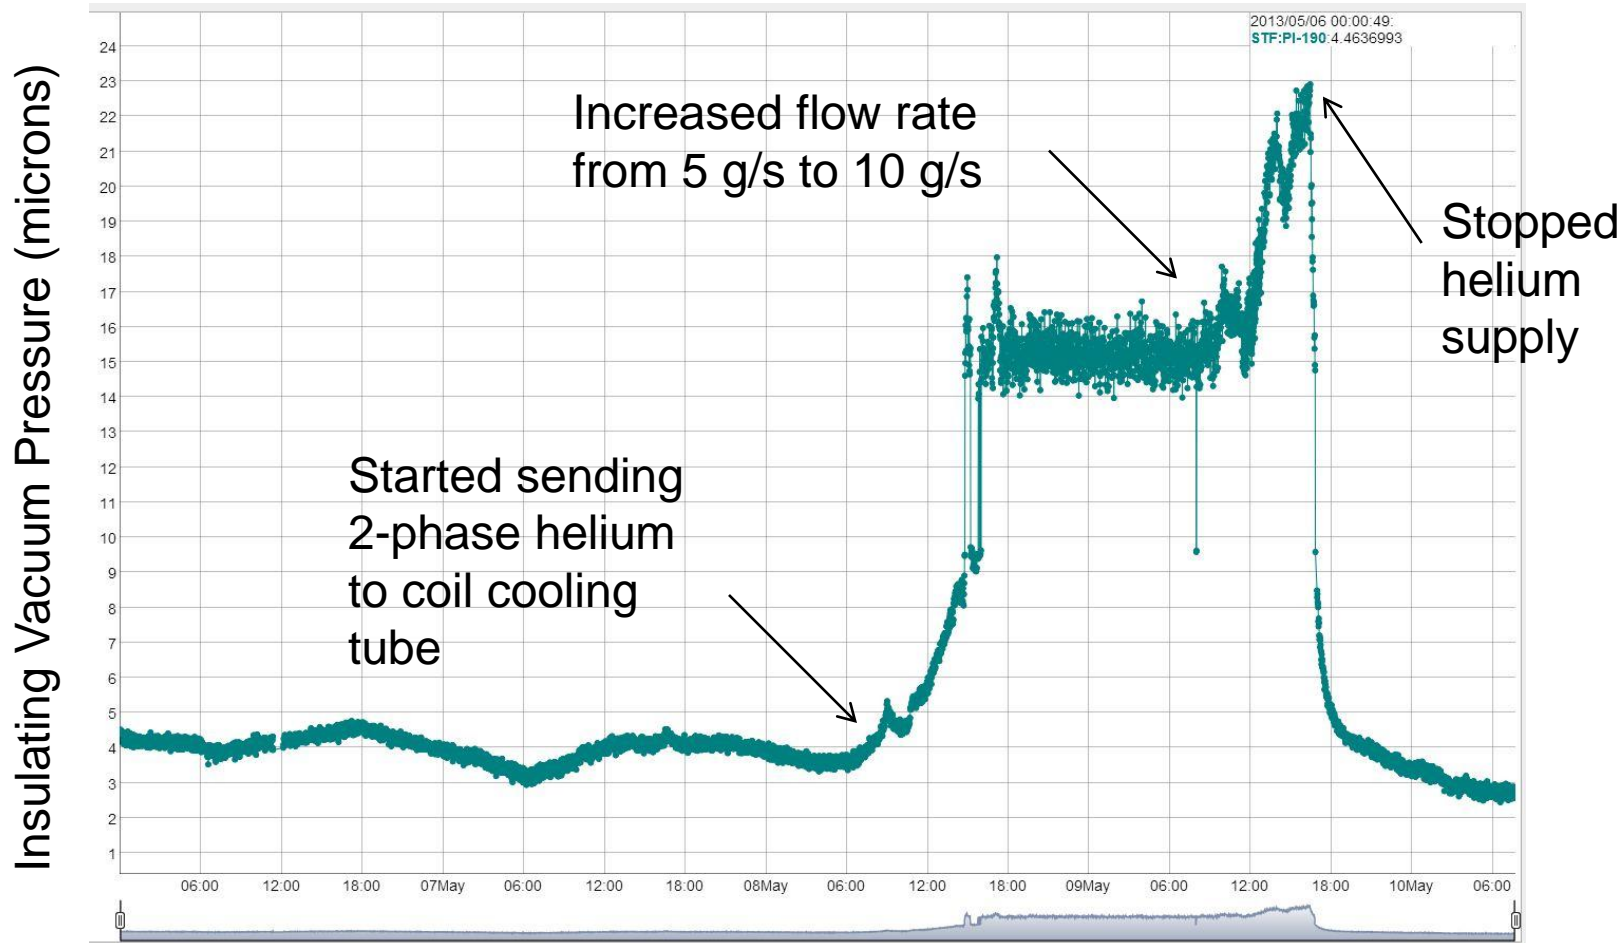

- After several attempts to overcome the cold leak, the best cooling conditions we could achieve were a cooling tube helium gas outlet temperature of 5.5 K at the maximum cooling flow rate of 10 g/s. Outer cold mass temperatures were between 8K and 11K. This was not sufficient to proceed with the test.
- A decision was made on 5/13/2013 to warmup the coil, and attempt to find and repair the leak at room temperature.
- After pressurizing the piping to 80 psig, a leak was found at one of the outlet VCR connections. All other joints did not show signs of a leak.

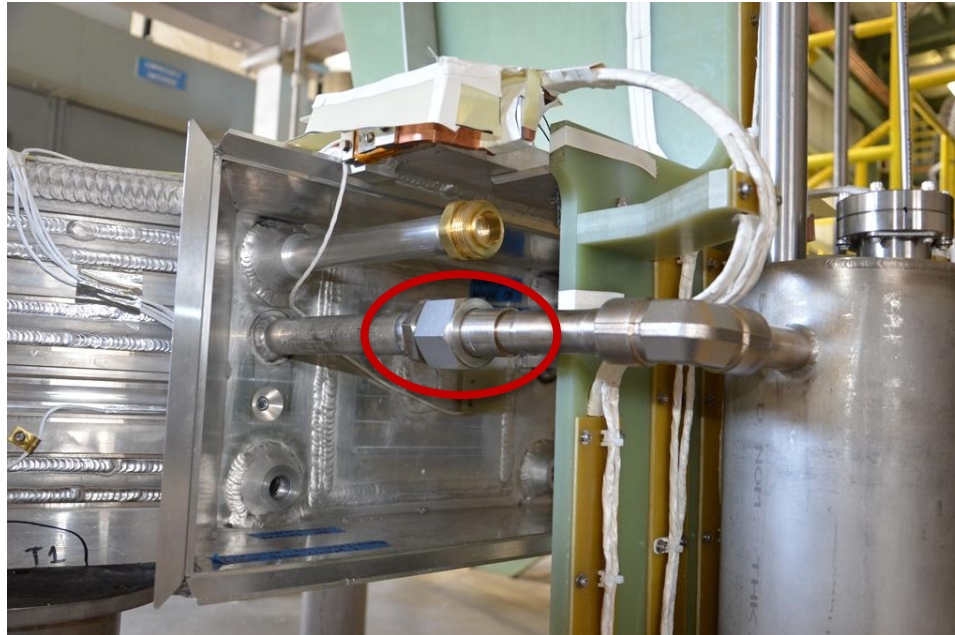

- According to the data, the leak location was never exposed to two-phase flow during cooldown:
 - A leak at this location does not explain the sharp dependence on two-phase flow conditions!
 - It does however explain a relatively poor insulating vacuum (~ 4 microns) during cooldown
- Is there another leak we could not find at room temperature?

- We have decided to first conduct an acceptance test of the test cryostat **without** the coil in the loop:
 - Install a coil bypass pipe between inlet and outlet
 - Short the power bus at the cold end
 - Cooldown and power the shorted bus to full current
- Once the cryo and power pass the acceptance test, then we connect the coil and proceed. If a leak is detected at that point, we can be fairly confident that it is in somewhere in the cold mass.
 - As a contingency, we are also considering having provisions for quickly switching to another cooling tube in the cold mass in case of problems

- Due to various power outages and restrictions, the earliest CHL will be ready to support cold operations again is the week of July 8th.
- We are going to try to have everything ready to proceed with the test cryostat acceptance testing by that week
- We estimate about two weeks to conduct the acceptance test and minor repairs if needed
- If everything goes well, coil testing can start late July/early August and go on for about two months