

The Simons Observatory

ALMA

CLASS




ACT

POLARBEAR/SIMONS Array



Simons Observatory Science Goals


- PRIMORDIAL GRAVITATIONAL WAVES (B-MODE TENSOR FLUCTUATIONS)* , NEUTRINO MASS, N_{eff} , DYNAMIC HISTORY (w , modified gravity)* via:
 - CMB lensing
 - Cross-correlations
 - Cluster survey to trace matter; kSZ to trace velocity fields
- OTHER WINDFALLS -- primordial magnetic fields, parity violation




WHAT is the Simons OBSERVATORY?

A GROUND-BASED CMB OBSERVATORY IN CHILE, UNDER DEVELOPMENT

- 1) ACT + SIMONS ARRAY TEAMS ++
- 2) SIMONS FOUNDATION FUNDING: \$40M
- 3) UNIVERSITY & LAB FUNDING: \$5M
 - UCSD
 - BERKELEY/ LBNL
 - U PENN
 - PRINCETON

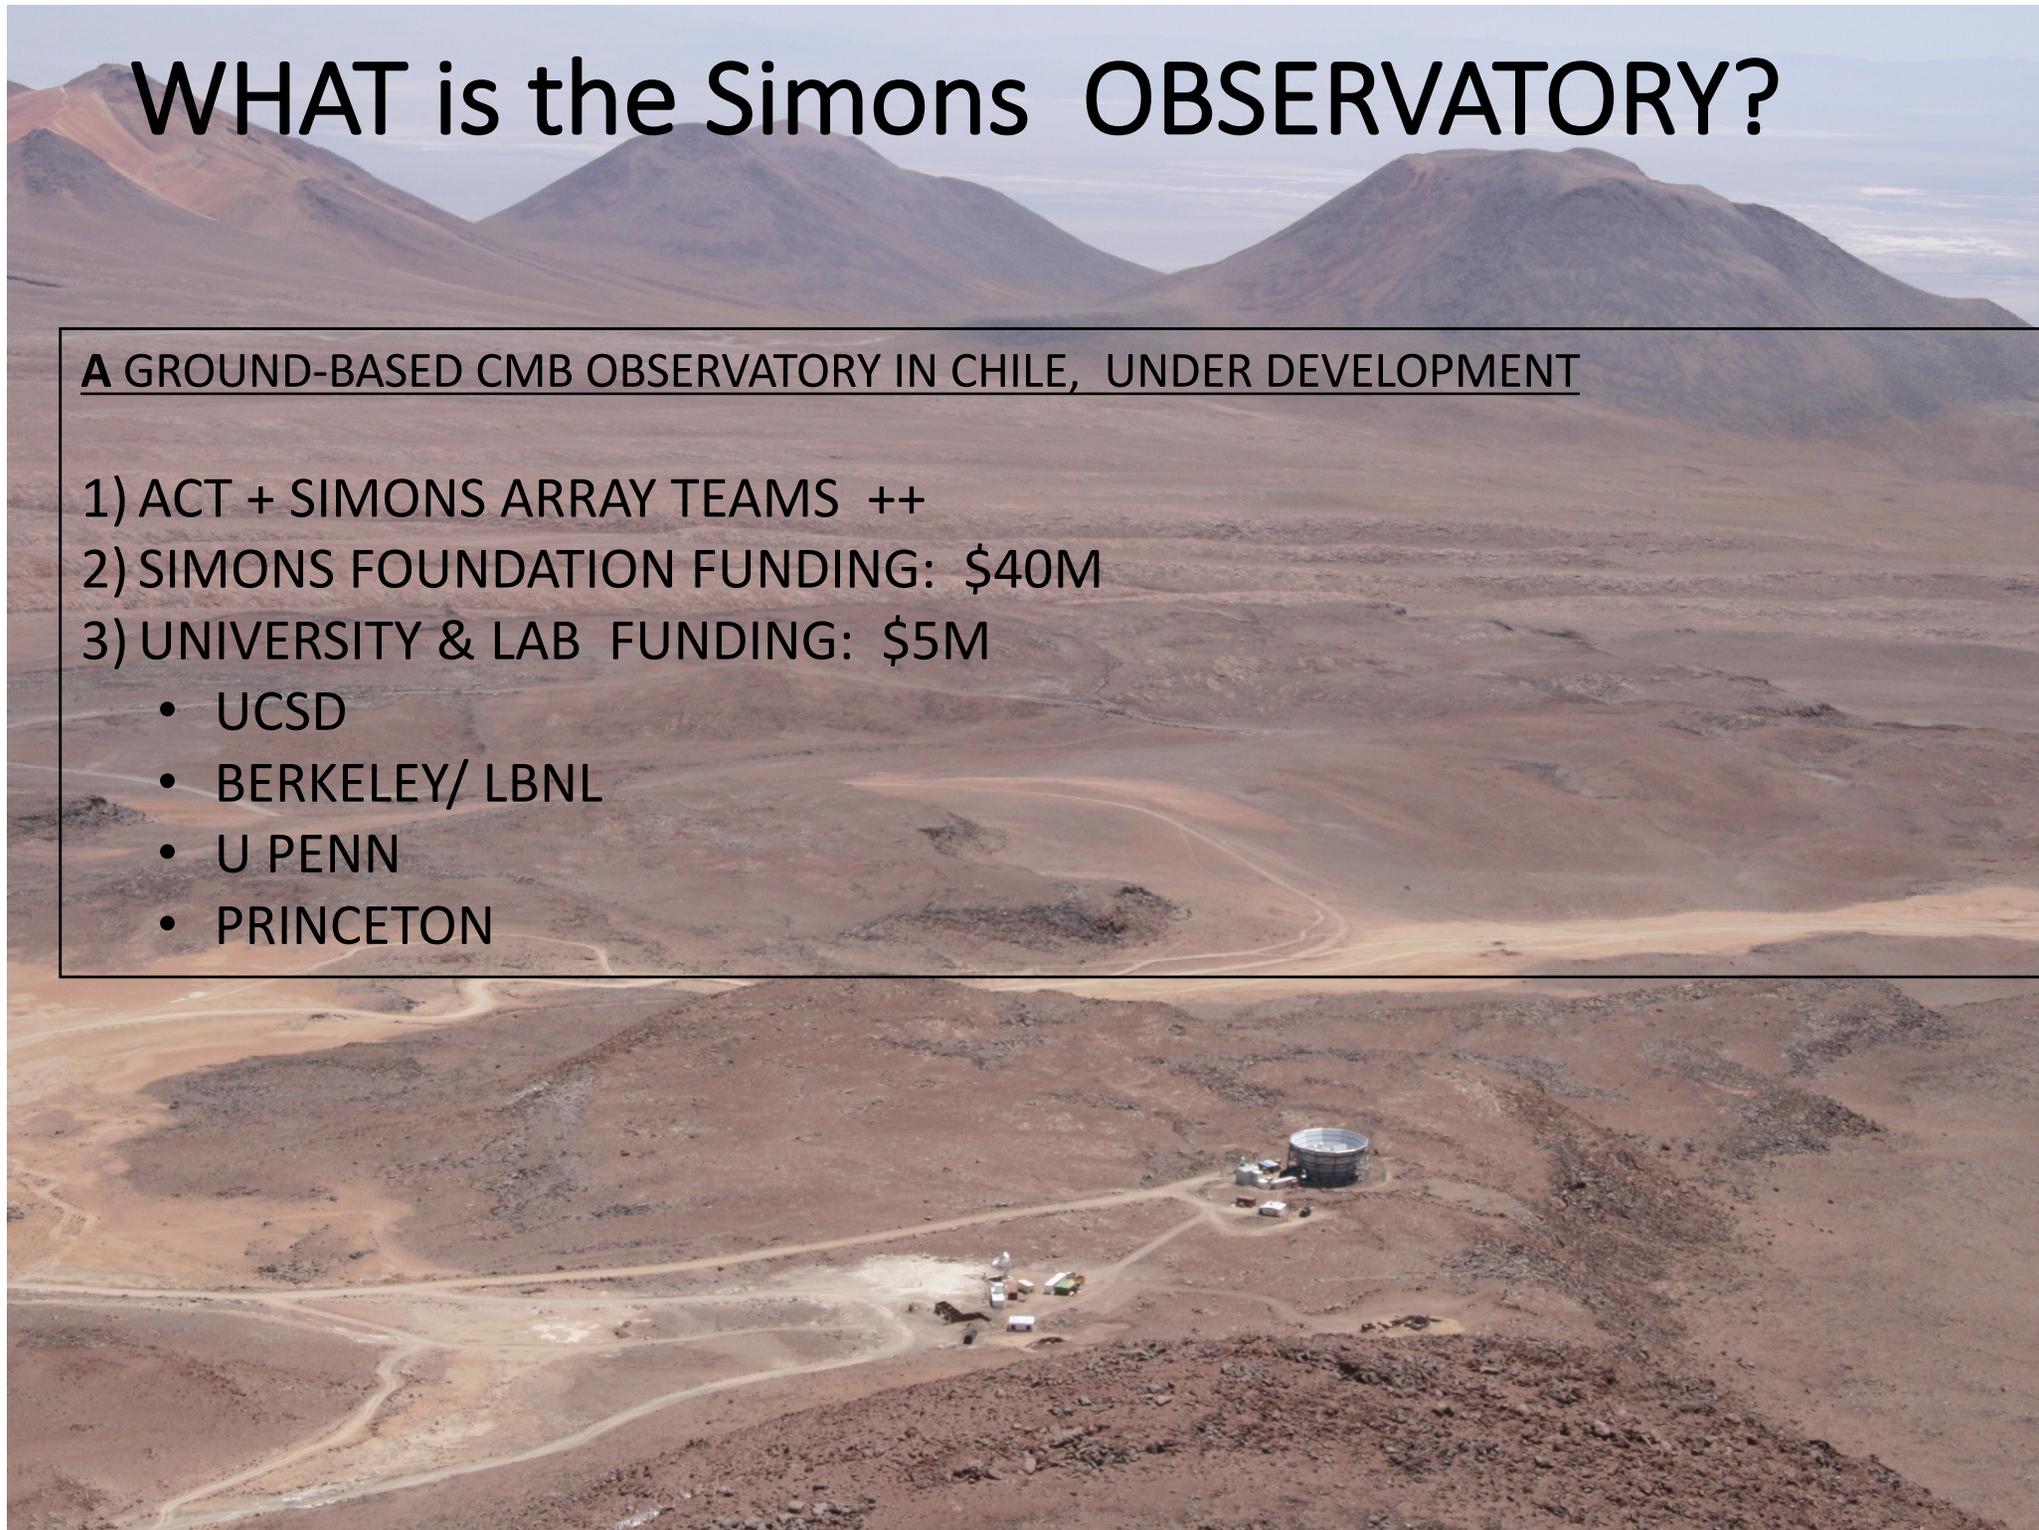

The Simons Observatory

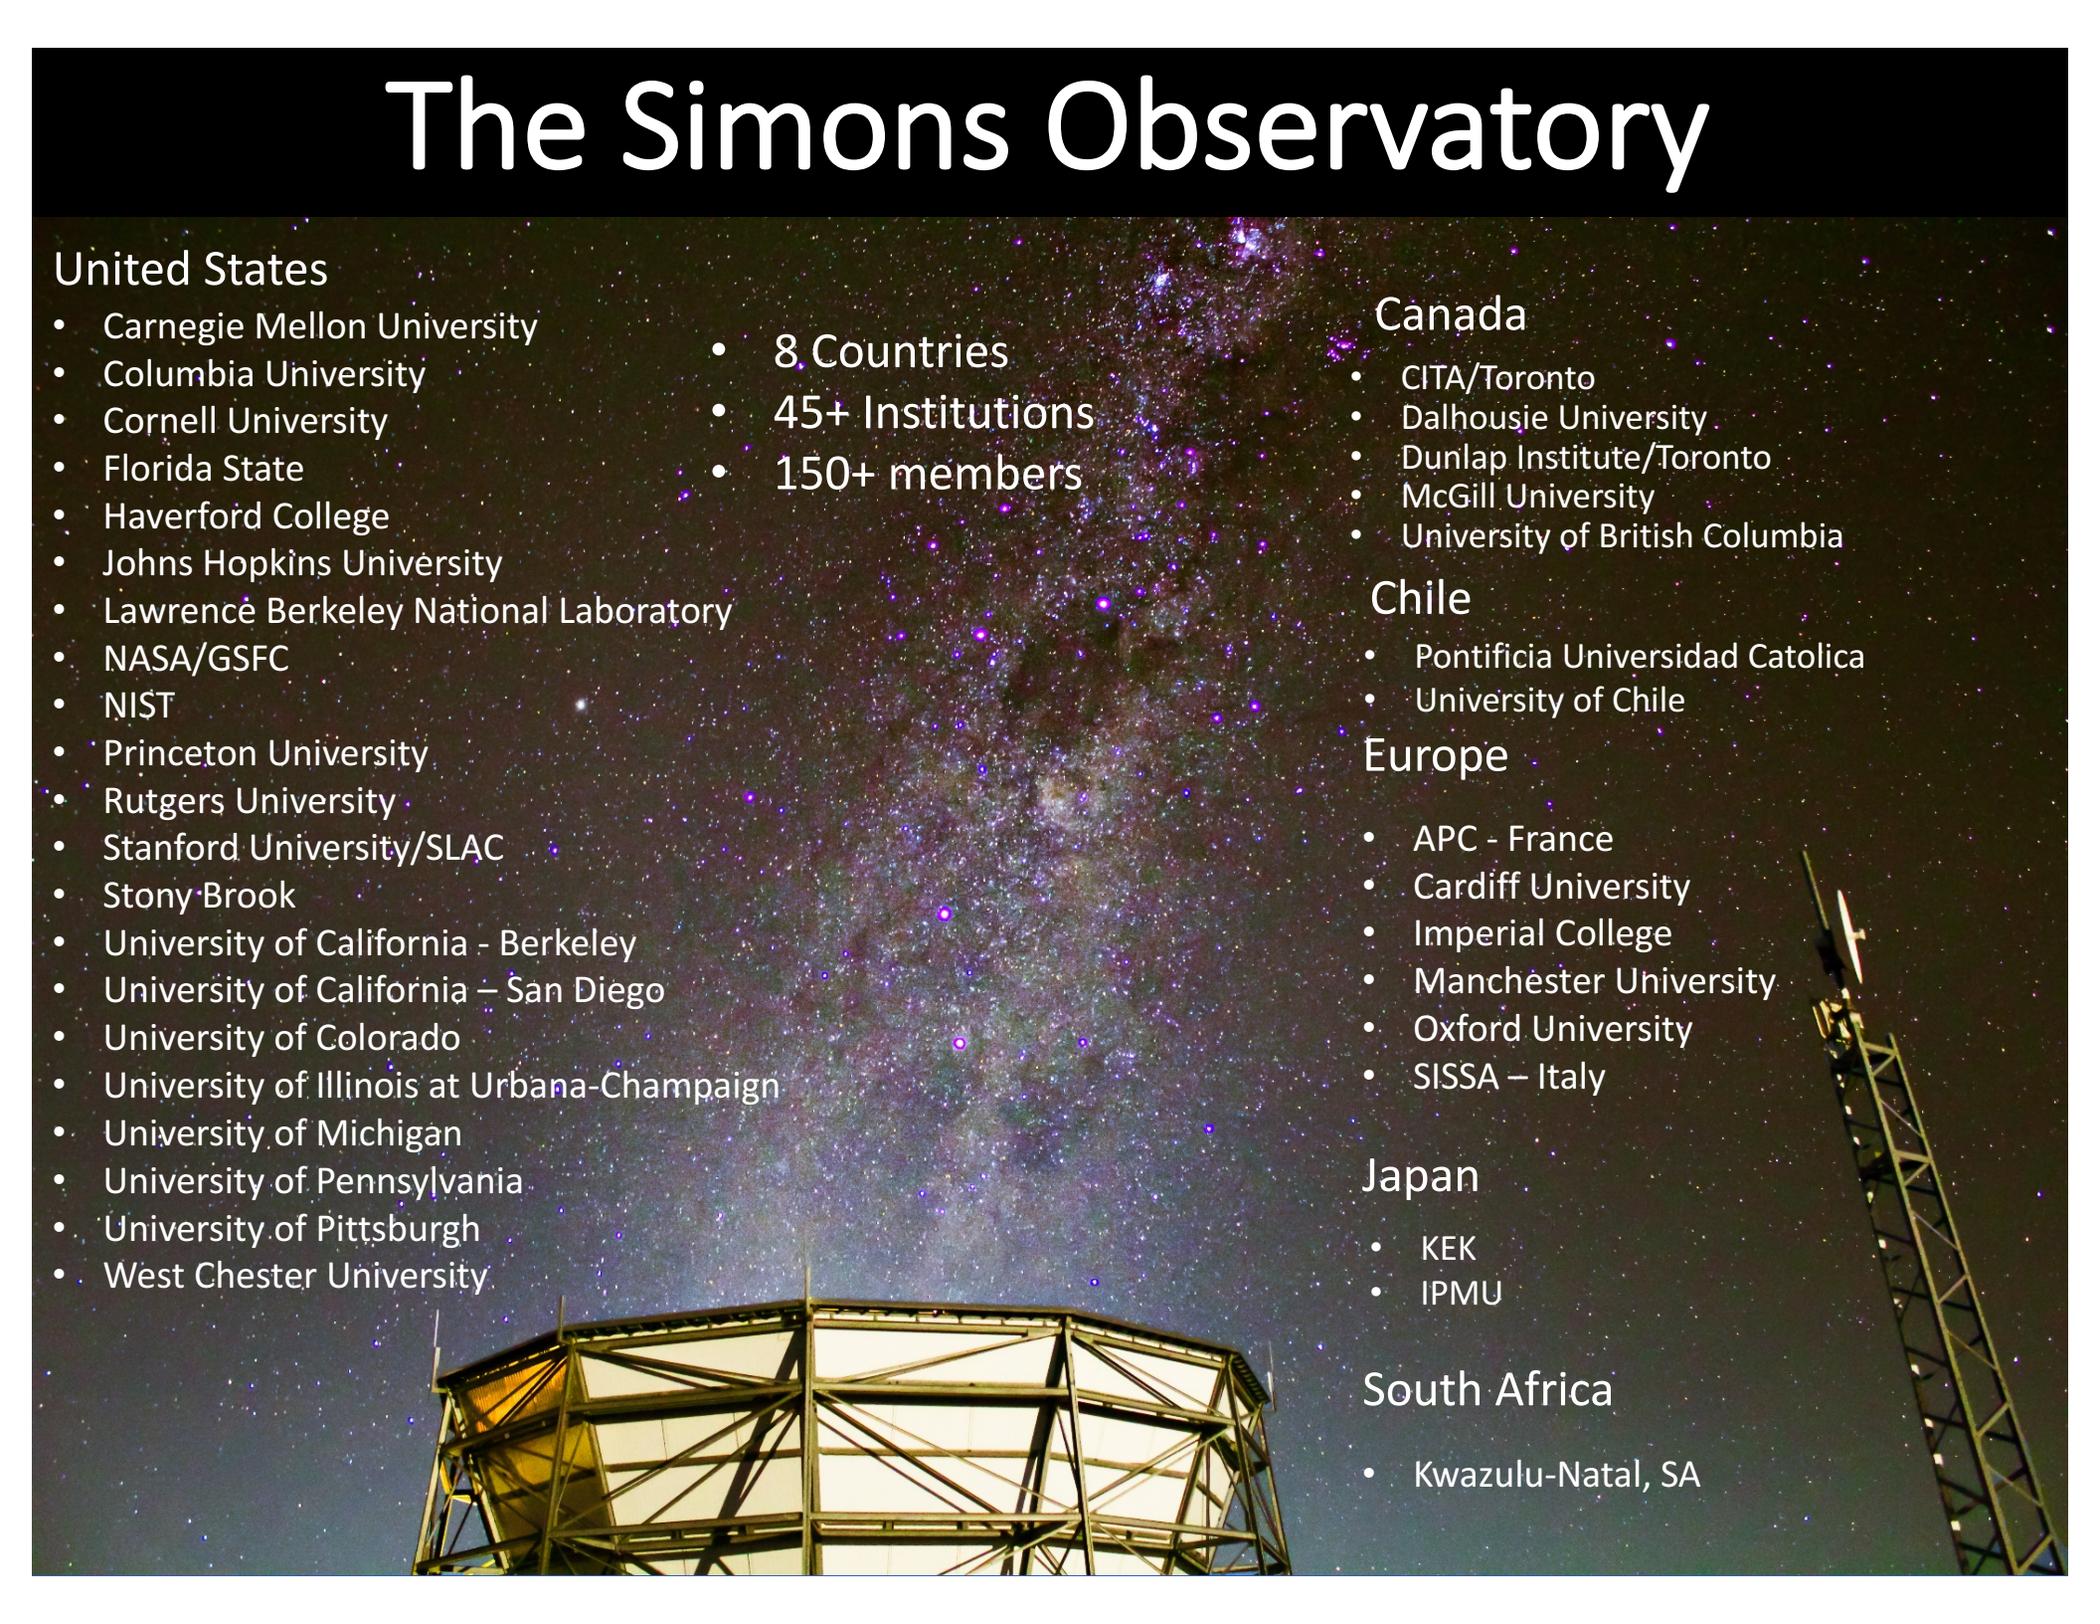

United States

- Carnegie Mellon University
- Columbia University
- Cornell University
- Florida State
- Haverford College
- Johns Hopkins University
- Lawrence Berkeley National Laboratory
- NASA/GSFC
- NIST
- Princeton University
- Rutgers University
- Stanford University/SLAC
- Stony Brook
- University of California - Berkeley
- University of California – San Diego
- University of Colorado
- University of Illinois at Urbana-Champaign
- University of Michigan
- University of Pennsylvania
- University of Pittsburgh
- West Chester University

- 8 Countries
- 45+ Institutions
- 150+ members

Canada

- CITA/Toronto
- Dalhousie University
- Dunlap Institute/Toronto
- McGill University
- University of British Columbia

Chile

- Pontificia Universidad Catolica
- University of Chile

Europe

- APC - France
- Cardiff University
- Imperial College
- Manchester University
- Oxford University
- SISSA – Italy

Japan


- KEK
- IPMU

South Africa

- Kwazulu-Natal, SA

Why CMB Observations From Chile?

Foreground + optical survey coverage map

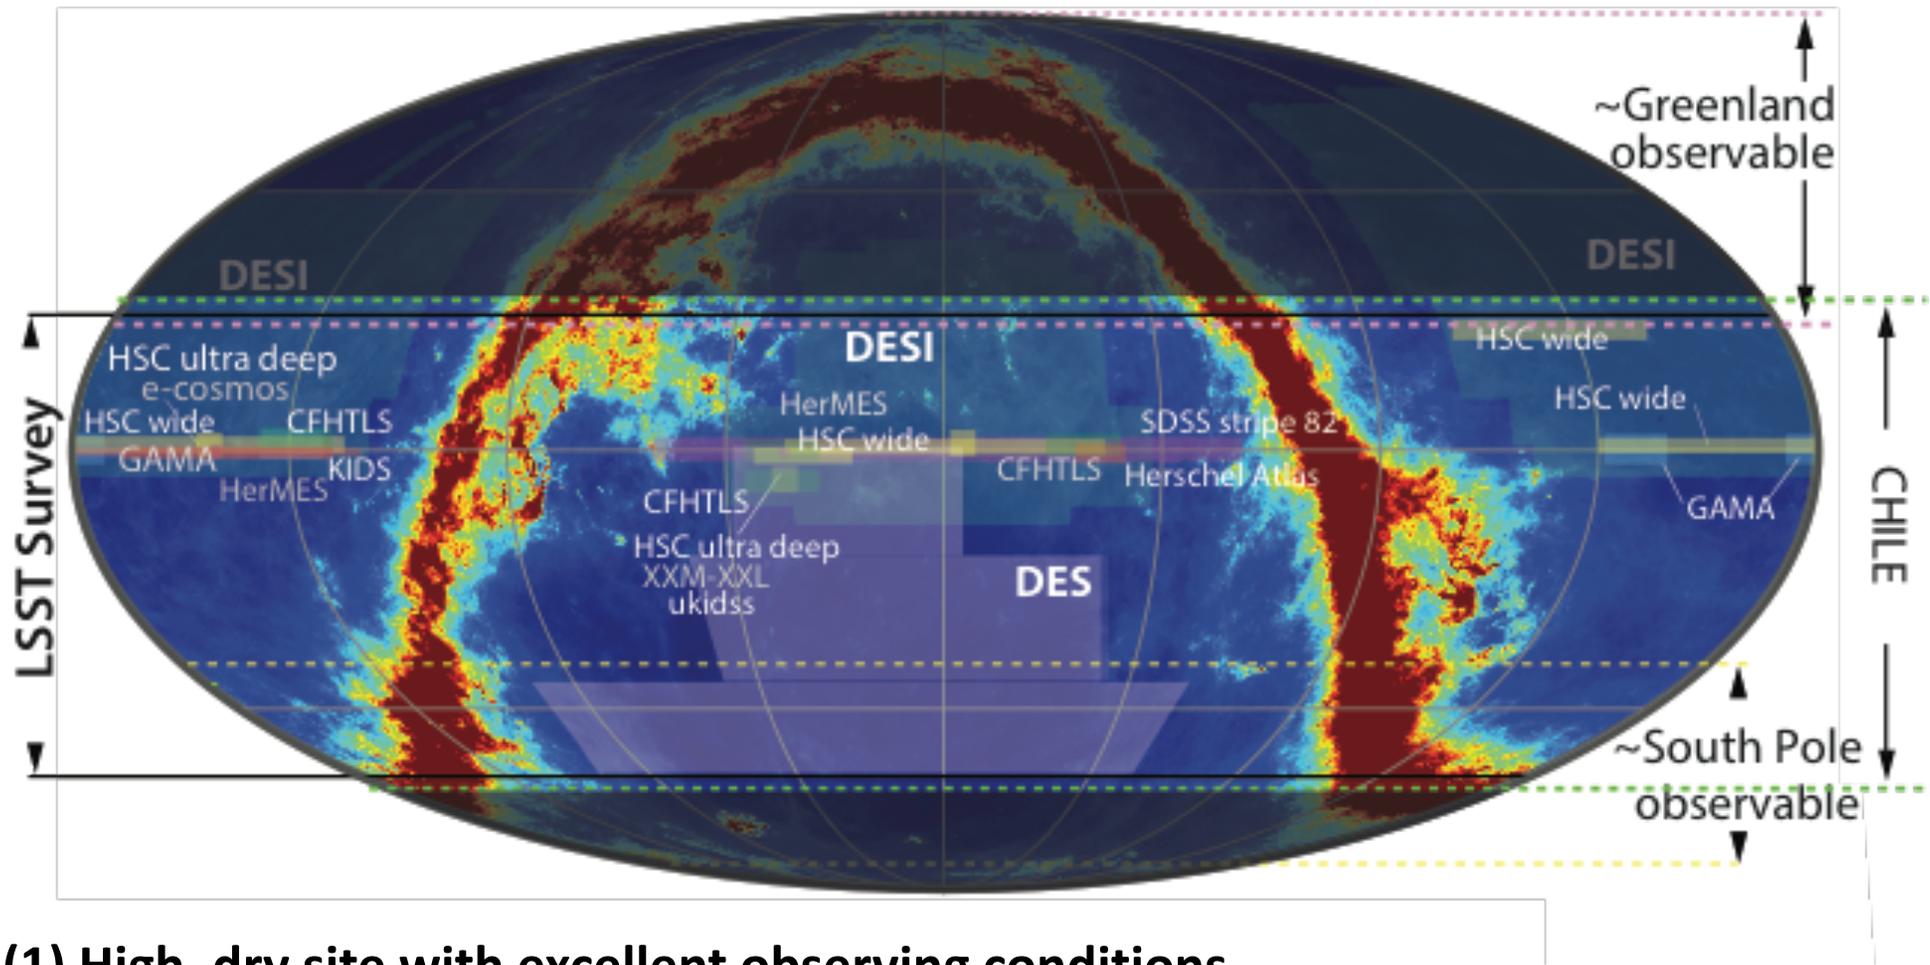

- (1) High, dry site with excellent observing conditions
- (2) Access to over half the sky
- (3) **Overlap with optical surveys** to maximize impact of LSS measurements for neutrinos, dark energy, dark matter, and astrophysics.

Simons Observatory Plans

- New telescopes
 - A 6m-class telescope
 - 3-6 0.5 "small aperture" telescopes
- Significant Infrastructure Upgrades.
 - Power, internet, and logistics.
- Technology Development:
 - Detectors, Optics, Telescopes, Receivers.
 - Total detector count 50-80K


Simons Observatory

ALMA


Infrastructure in Preparation for CMB S4.

- 500 KVA power plant or ALMA power
- Combined control room
- Telescope/receiver staging building
- High bandwidth internet connection to ALMA

Two Site Engineers + Technician

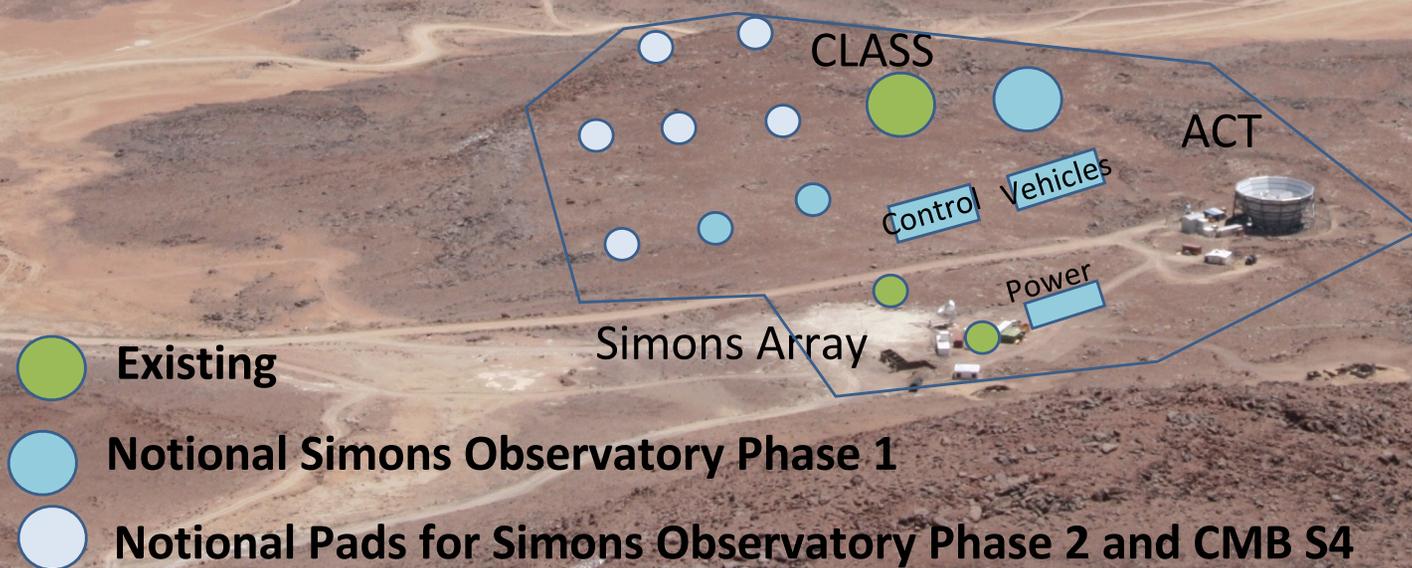


6-meter Aperture Telescope

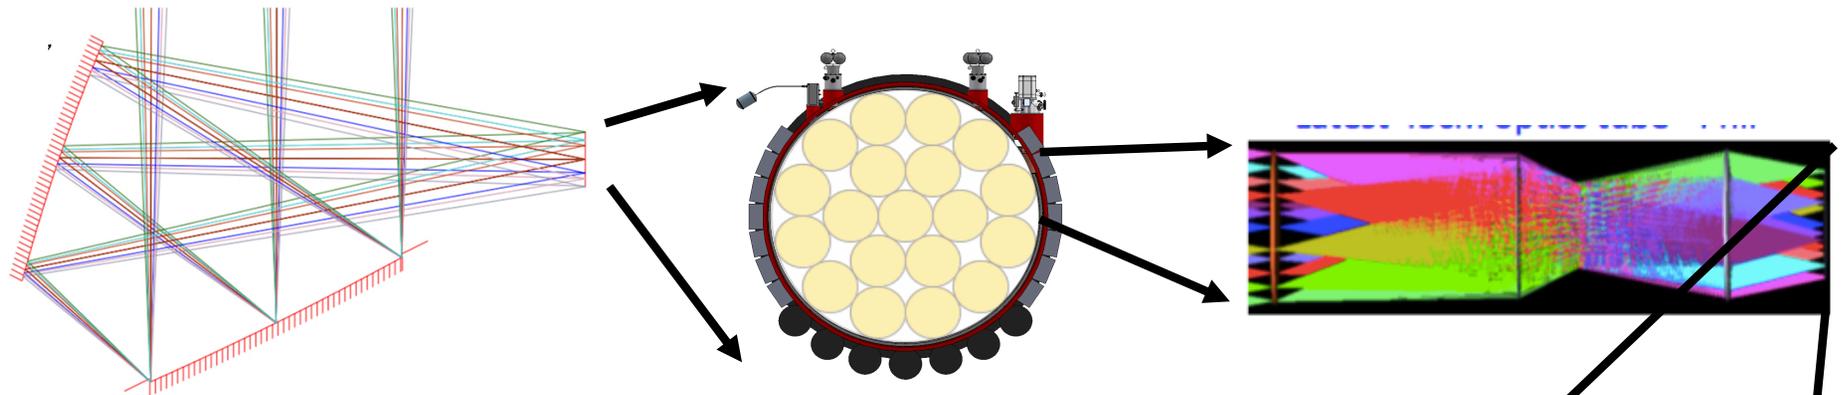


Simons Observatory Baseline

- 6m diameter Cross Dragone design
 - Considered: Three Mirror Anistigmat, offset Gregorian
- Single ~2.5 m diameter receiver
- 19 42-cm diameter optics tubes
- 40,000 detectors for SO deployment
 - Design capable of containing 100,000 detectors

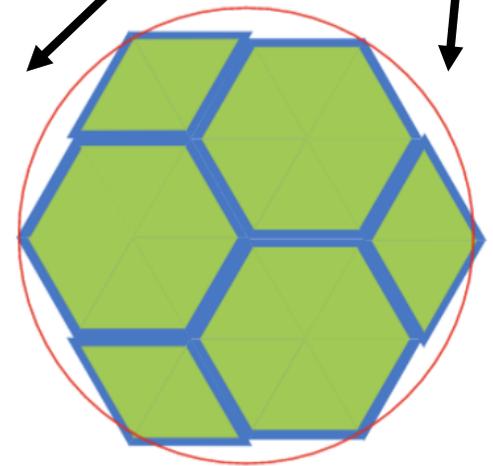

Focal Plane Optimization for 6m Telescope

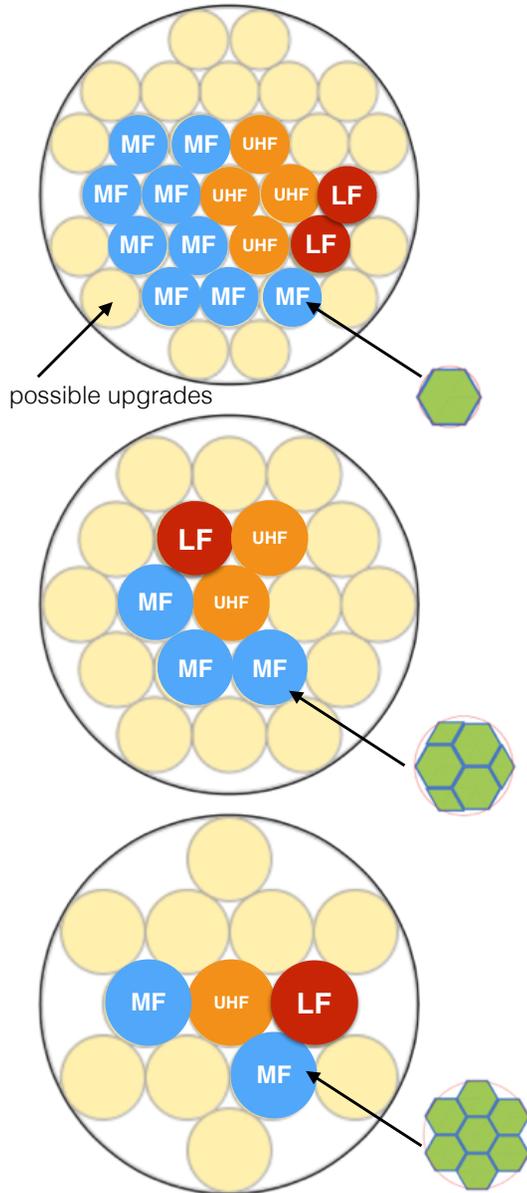


- Parameters that are optimized together
 - Optics Tube Diameter
 - Focal Plane Diameter
 - Focal ratio (f/#) at focal plane
 - Sensitivity per detector
 - Sensitivity per silicon wafer


45 cm Optics Tube, Silicon Lenses

Receiver	Channel	NET _{Det}	NET _{Tube}
LF	30 GHz	370	20.8
	40 GHz	254	14.3
MF	90 GHz	275	6.5
	150 GHz	343	8.1
HF	150 GHz	344	6.9
	220 GHz	785	15.8
UHF	230 GHz	786	13.8
	280 GHz	2019	35.6

0.5-m Aperture Telescopes

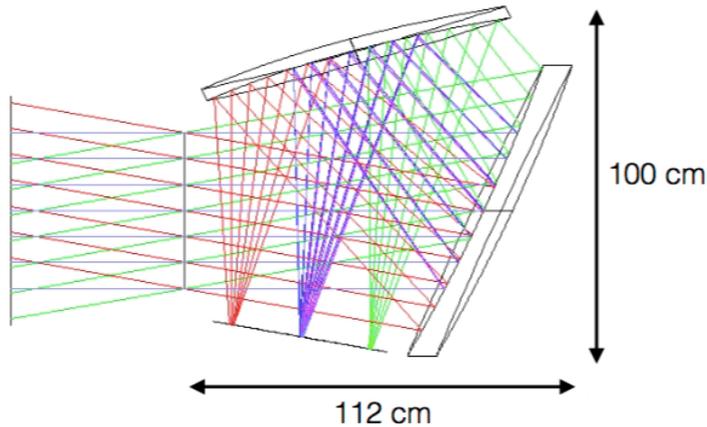

Crossed Dragon Reflecter Design

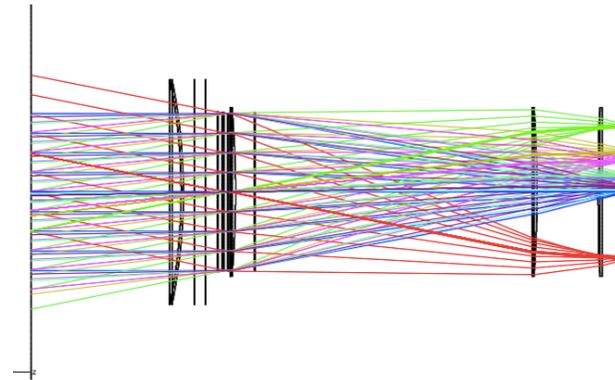

Two-lens Refractor Design




Simons Observatory Baseline

- Multiple 45-cm Apertures
 - Reflector and refractor designs being considered
 - Cryogenic Half-wave plate
 - Larger apertures considered for $f < 75$ GHz
- Multichroic detectors at 100 mK
 - 30-300 GHz with all apertures combined

Detector Arrays

Horn-Coupled OMT Pixel

Lenslet-Coupled Sinuos-Antenna Pixel

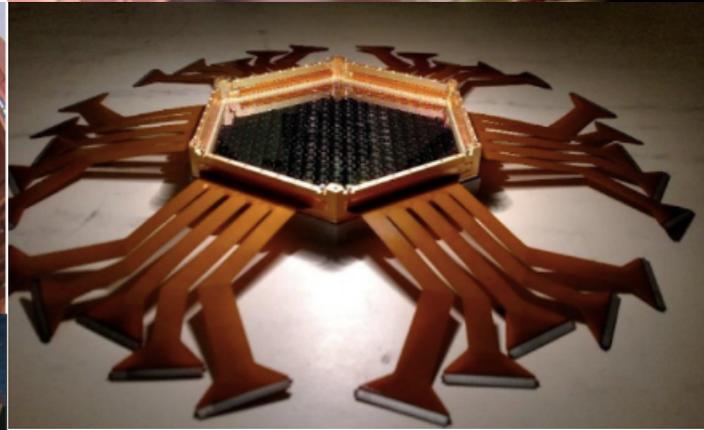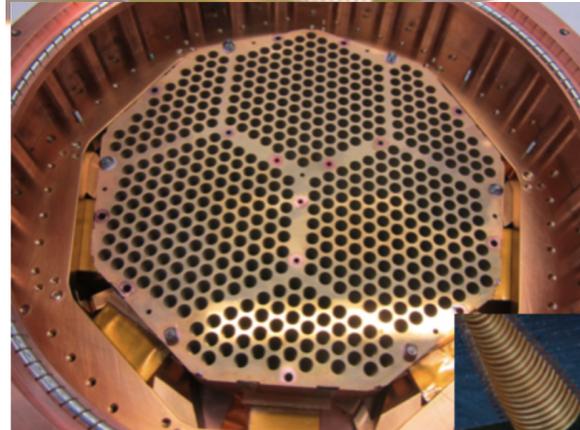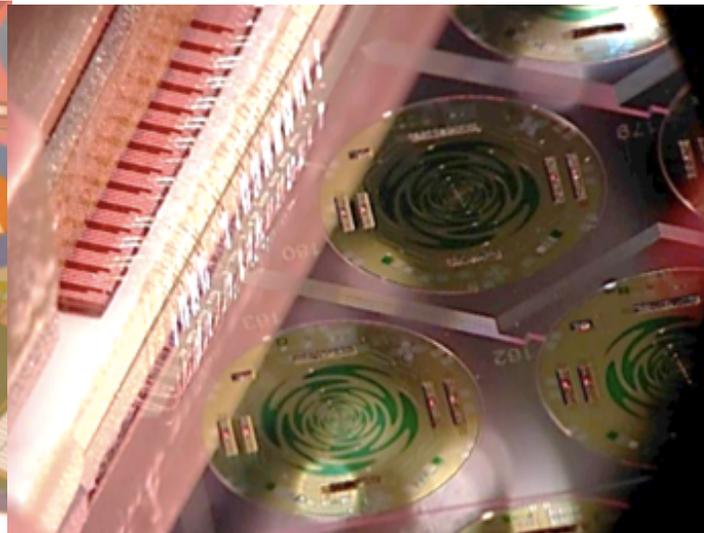


Horn-Coupled OMT Array

Lenslet-Coupled Sinuos-Antenna Array



- Multichoric Focal Planes for 6m and 0.5m telescopes
 - Combination of horn-coupled and Lenslet-coupled Pixels
 - Optimization of focal-planes under active study

Readout Electronics


Microwave MUX

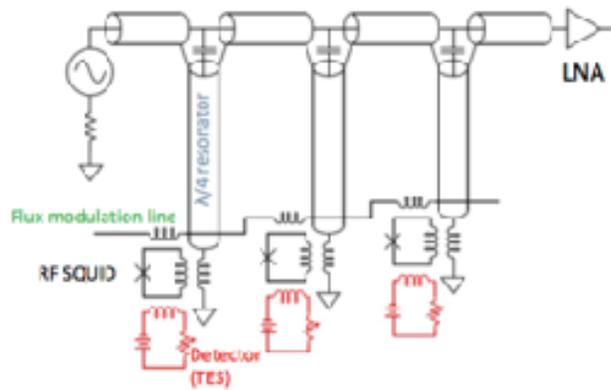

Frequency Domain Multiplexing (FDM)

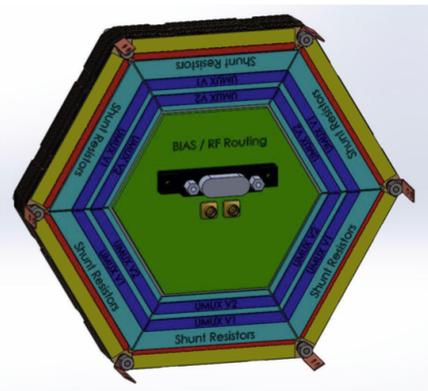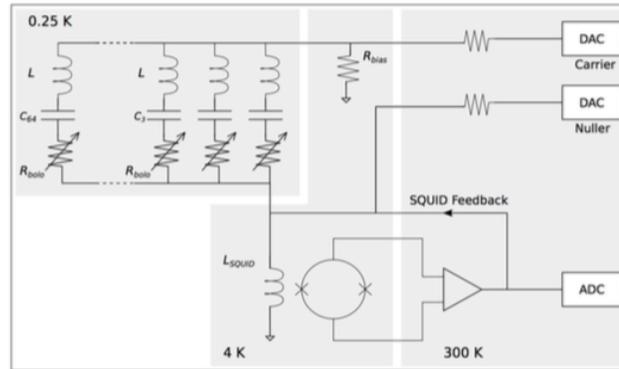

Conceptual 2D readout board

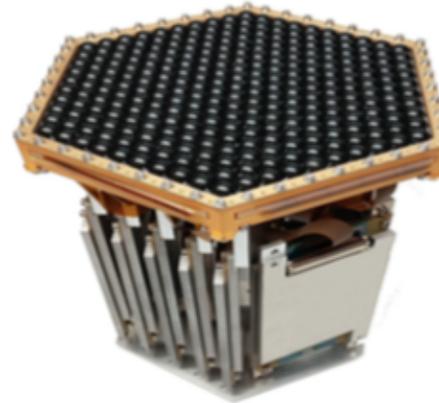

- A single multiplexer Technology will be used in SO
 - Microwave MUX (aka MSQUIDs)
 - Frequency Domain Multiplexing (aka fMUX)

The Simons Observatory and CMB-S4

SIMONS OBSERVATORY: STEPPING STONE TO FUTURE CMB S4 CHILE SITE

- Simons Observatory prototypes to **accelerate** S4 process
 - S4-capable telescopes, shielding, cold optics
 - S4-capable cryostats, focal planes, muxing



- Prototyping jumpstarts the S4 Chile site, but aims to **aid** CMB-S4 globally
- Work designed to **complement** CMB-S4 funding from NSF and the DOE


Simons Observatory: Rough Timeline



- Planning and Technology Development: 2016-2017
- Logistical upgrades to the site infrastructure: 2016-2018
- Construction and installation of Telescopes by end of 2020.
- Production of new CMB-S4-type receivers with partially filled focal planes by end of 2020.
- Observing: 2021-2022

Backup

Focal Plane Optimization for 6m Telescope

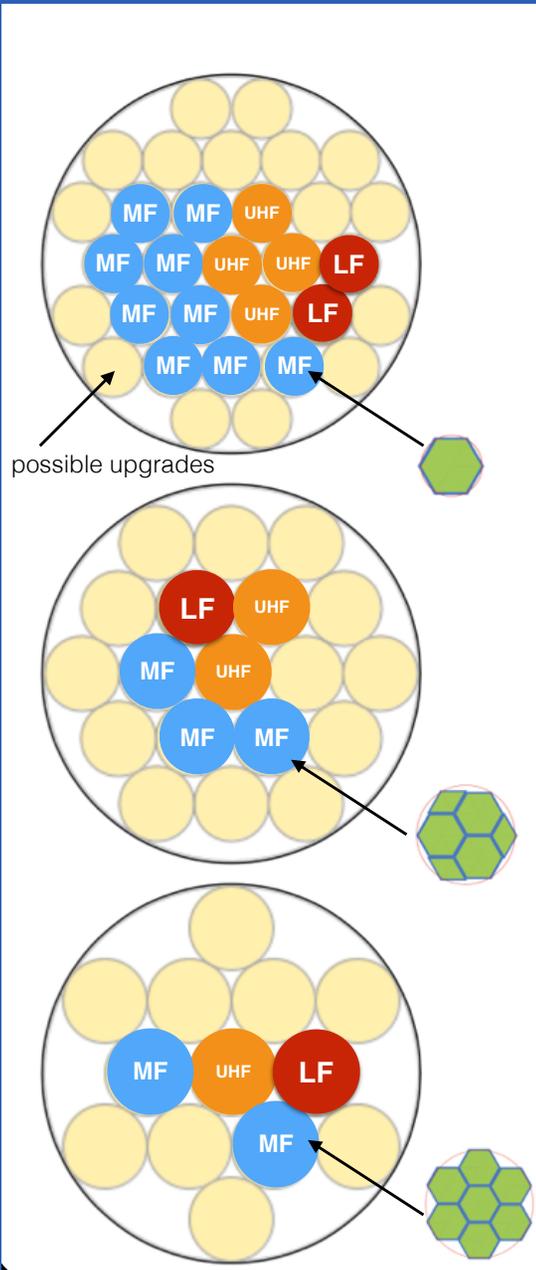


- Parameters that are optimized together
 - Optics Tube Diameter
 - Focal Plane Diameter
 - Focal ratio ($f/\#$) at focal plane
 - Sensitivity per detector
 - Sensitivity per silicon wafer

45 cm Optics Tube, Silicon Lenses


Receiver	Channel	NET_{Det}	NET_{Tube}
LF	30 GHz	370	20.8
	40 GHz	254	14.3
MF	90 GHz	275	6.5
	150 GHz	343	8.1
HF	150 GHz	344	6.9
	220 GHz	785	15.8
UHF	230 GHz	786	13.8
	280 GHz	2019	35.6

Mapping Speed vs. Pixel Diameter

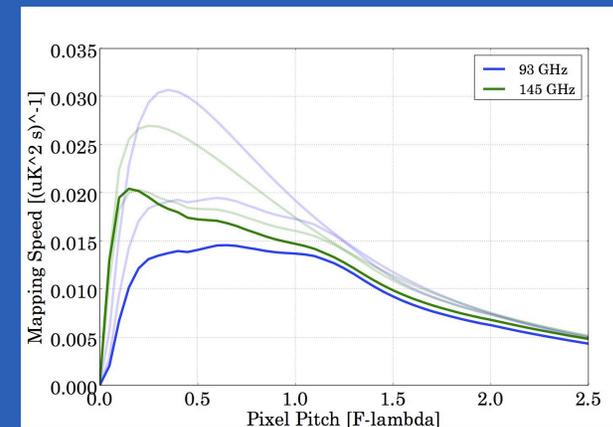

Pixel Diameter ($D/(f*\lambda)$)






Fields Observed by AdvACT

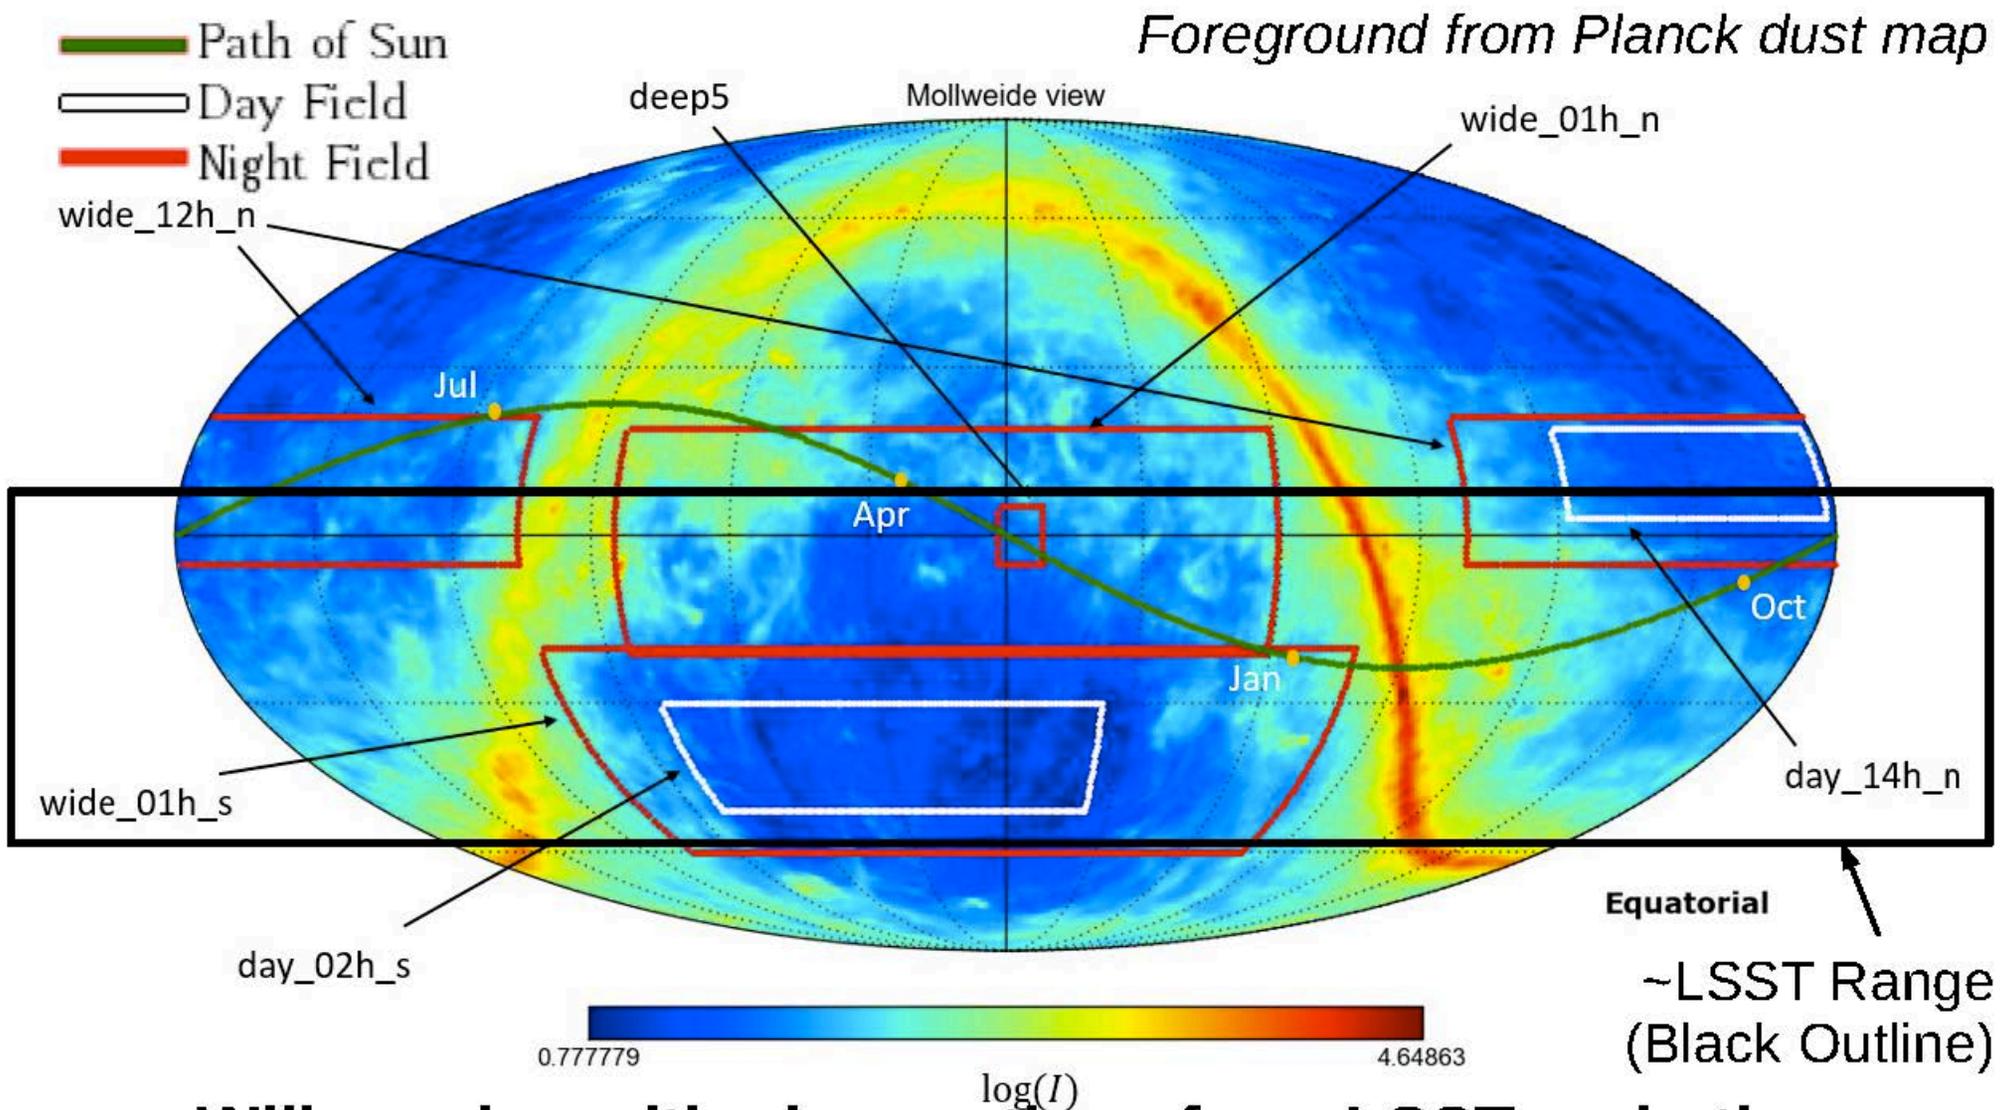

Will overlap with observations from LSST and other optical surveys


Jason Stevens, Cornell University for the Advanced ACTPol Collaboration

Atacama Cosmology Telescope Multichroic Detector Arrays

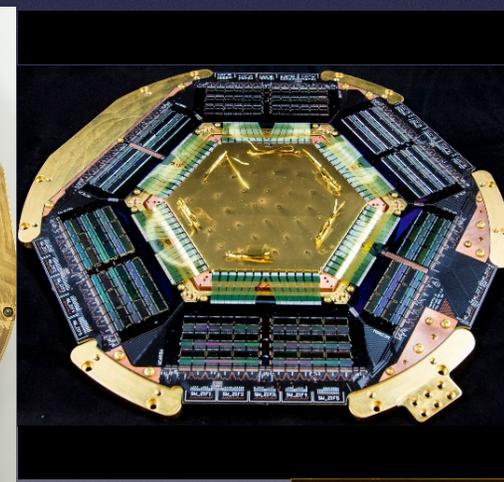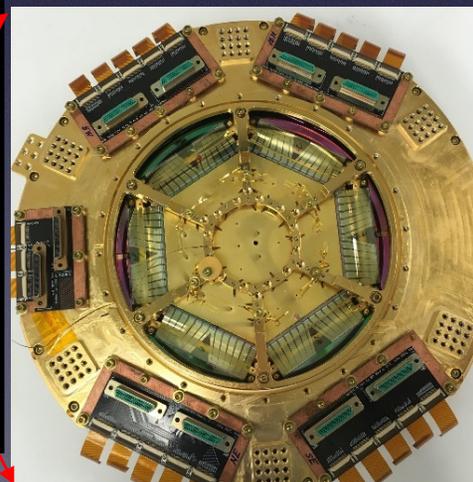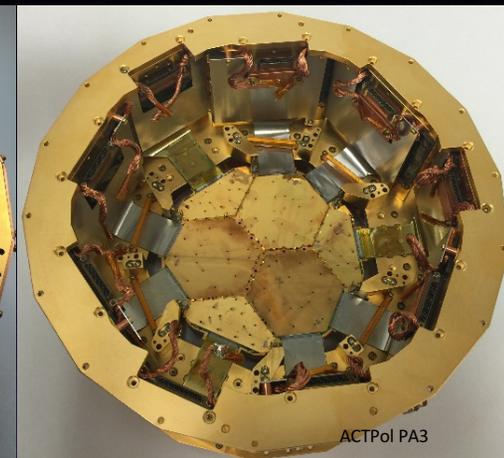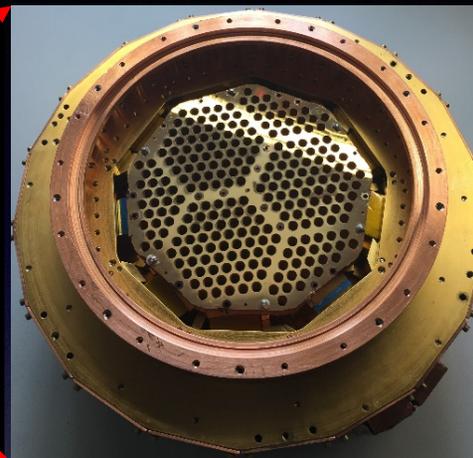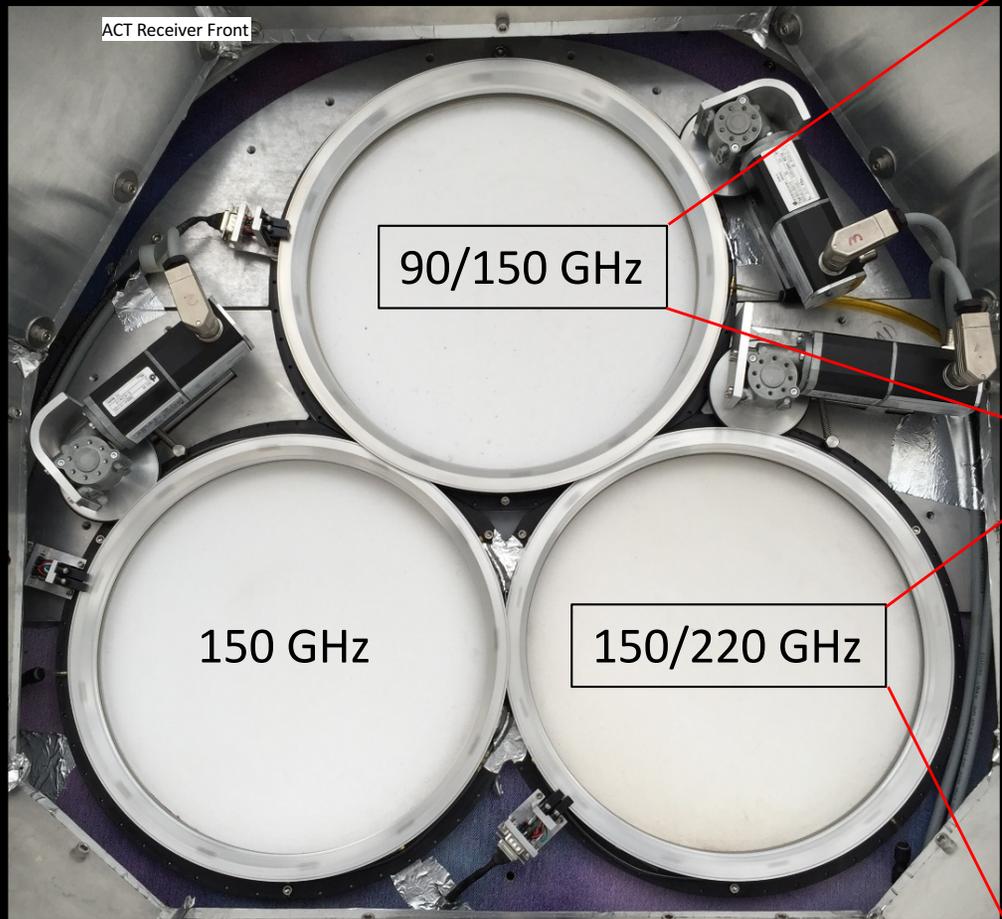

Rotating Half Wave Plates (8 Hz Modulation) not installed in this picture.

90/150 arrays were installed for 2015
150/220 installed in July 2016



Simons Array (Stage-III)

Simons Array (= 3x POLARBEAR-2)

- 22,764 bolometers
- Resolution : 3.5' @150GHz
- 4 frequency bands (95/150/220/280 GHz)
- Deep + Wide sky surveys ($f_{\text{sky}}=65\%$ visible)

90/150 GHz

90/150 GHz

220/280 GHz

Inflation


- $\sigma(r=0.1) = 6 \times 10^{-3}$ (w/foreground)

Neutrino mass

- $\sigma(\Sigma m_\nu) = 40 \text{ meV}$ (w/foreground)
- (w/ DESI-BAO)



Focal Plane and Readout

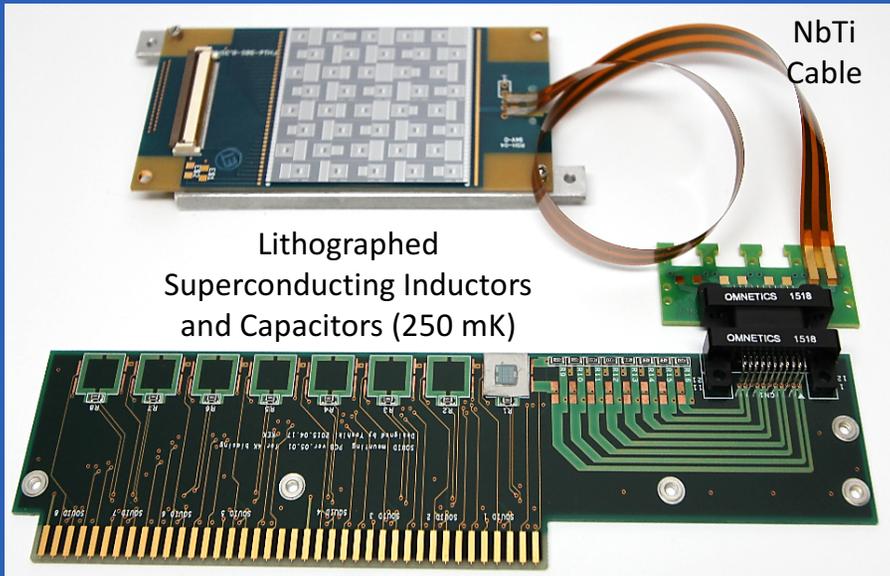

150 mm
Lenslet Array




SQUID Printed Circuit Board
(4 K)

Detector
wafer (inside)

Readout
Components

150 mm

Detector Module Photograph

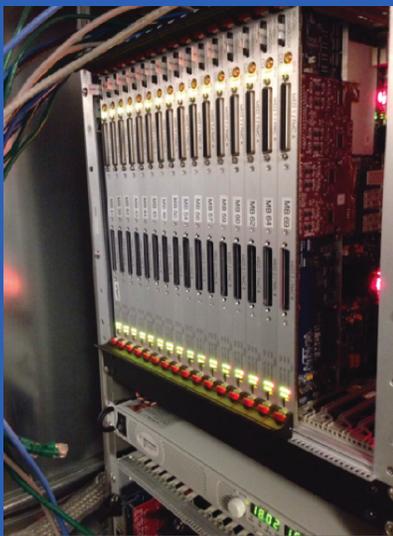

Simons Observatory Low Altitude Research Station [SOLARS] and Chile Logistics

Expand Facility to accommodate combined team.
Develop common use infrastructure such as trucks.
Hire SOLARS Manager and Site Manager

San Pedro
2 km

Laundry/
Extra Room

Kitchen/
Dinning Room

5 Rooms


2 Offices

1 Room


5 More Rooms

Chickens and Goats!

Bungalow

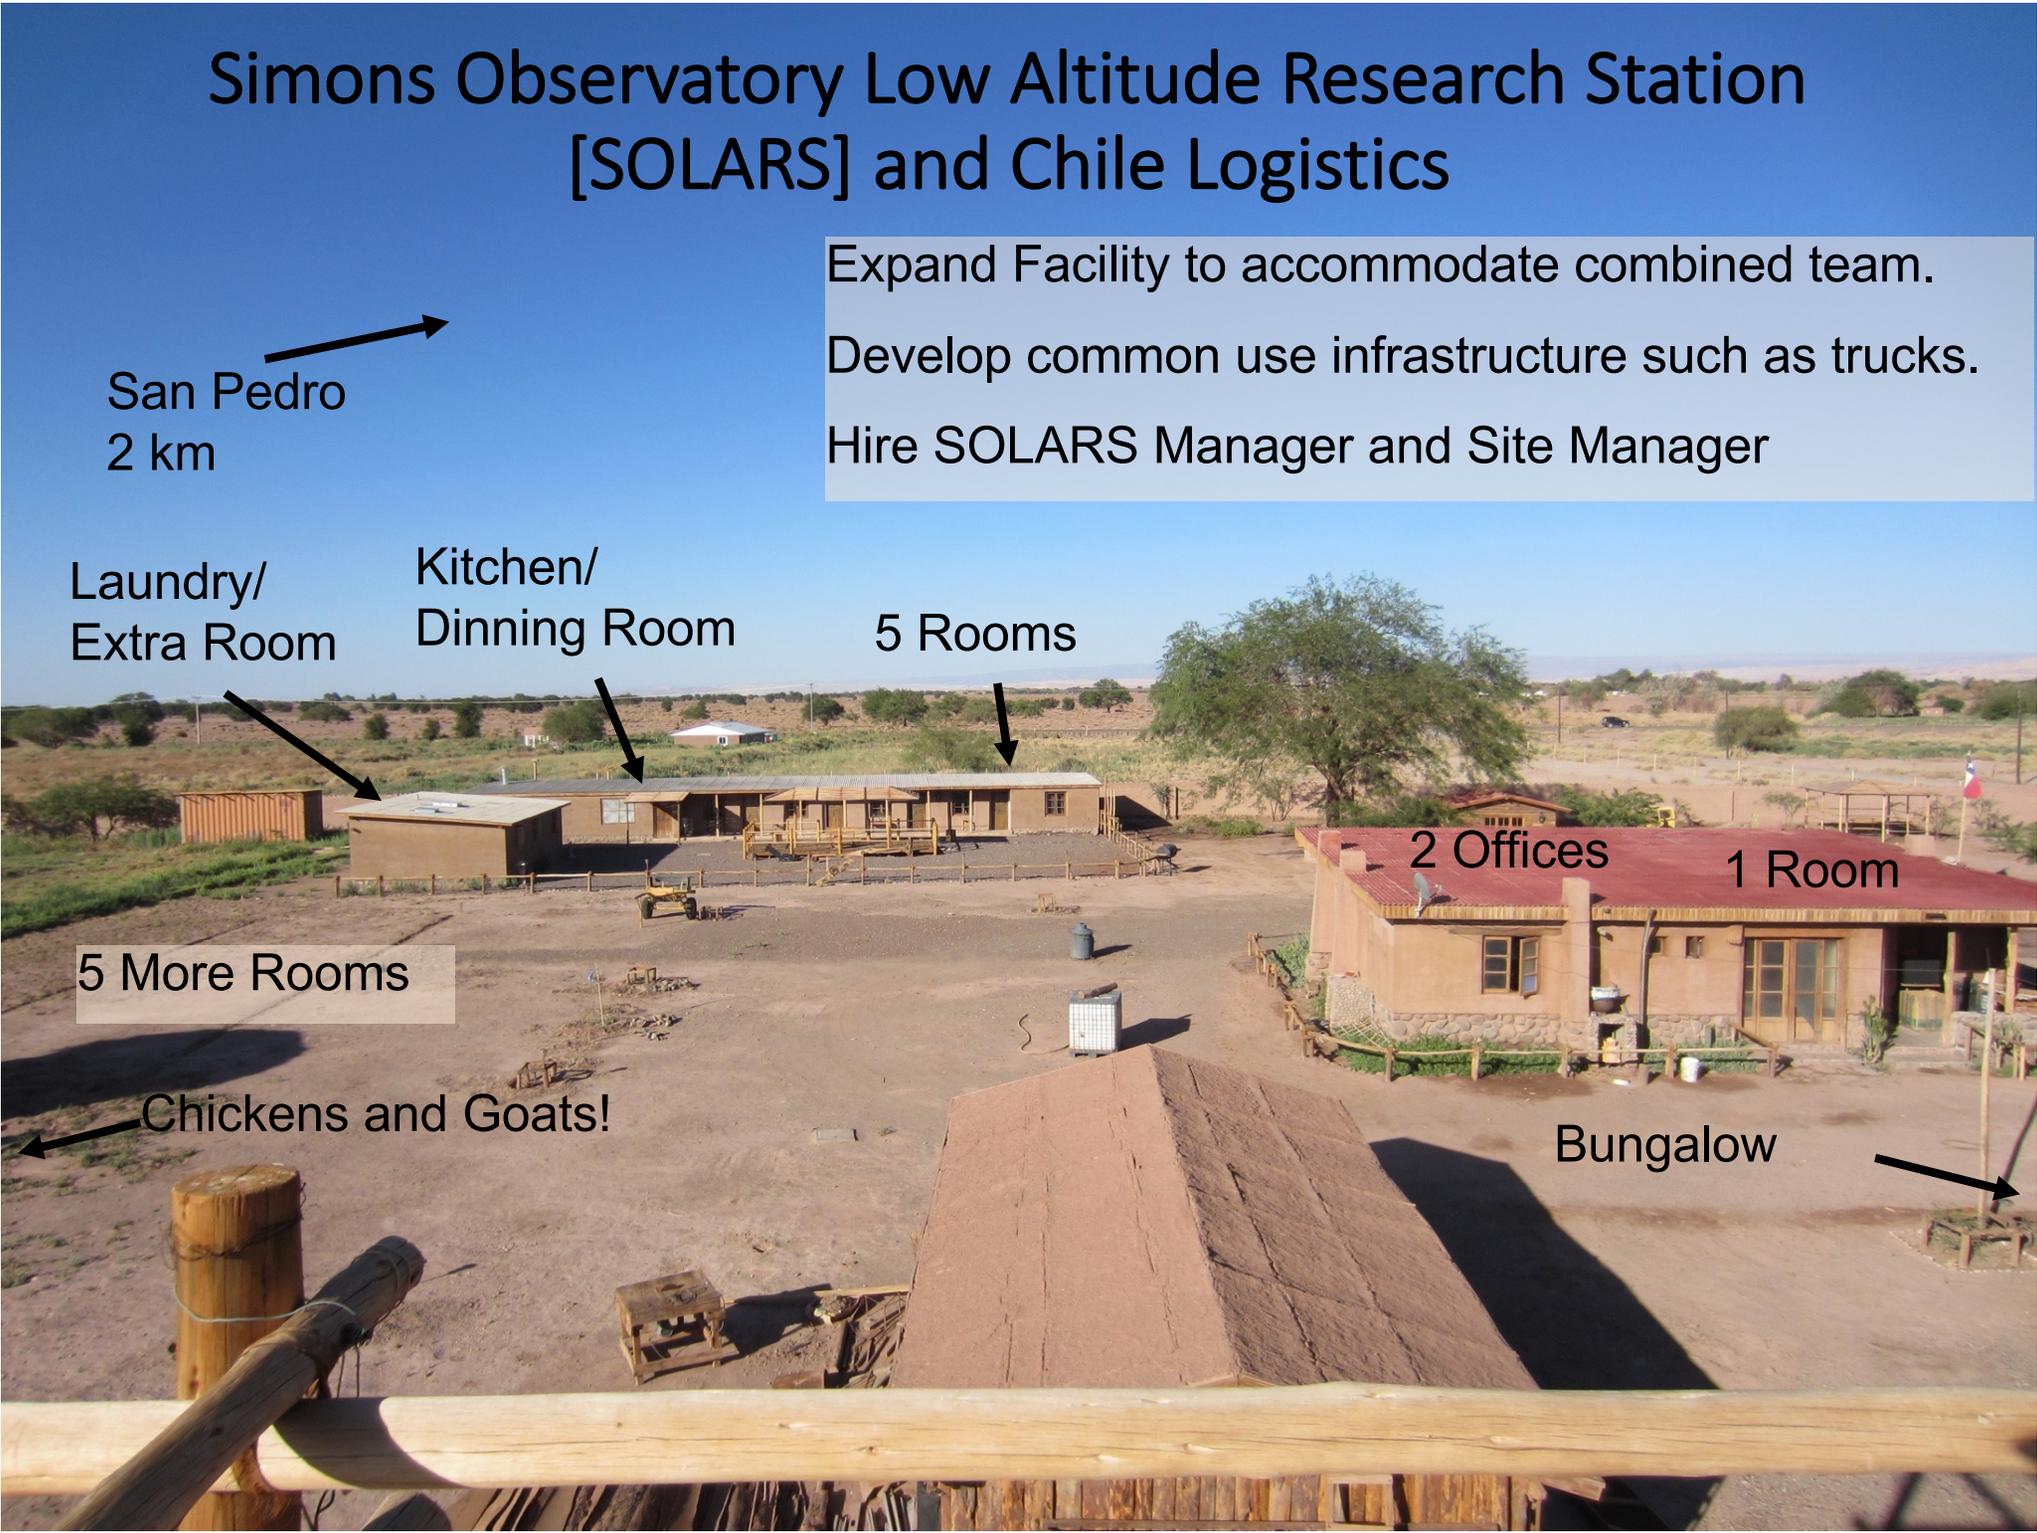

The Simons Observatory Combines the ACT and Simons Array Teams

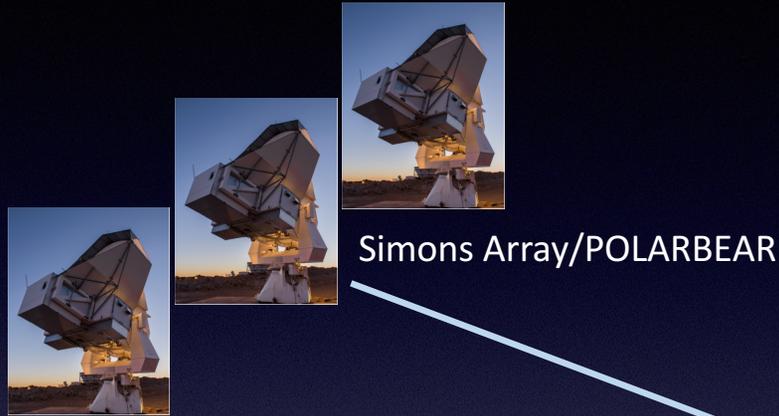

- ACT and the Simons Array will continue to operate independently until the end of the current MSIP awards (2018/2019).
- In the meantime, they will begin to develop and share site infrastructure.
- CLASS is not currently part of the Simons Observatory. We will work to share infrastructure.